



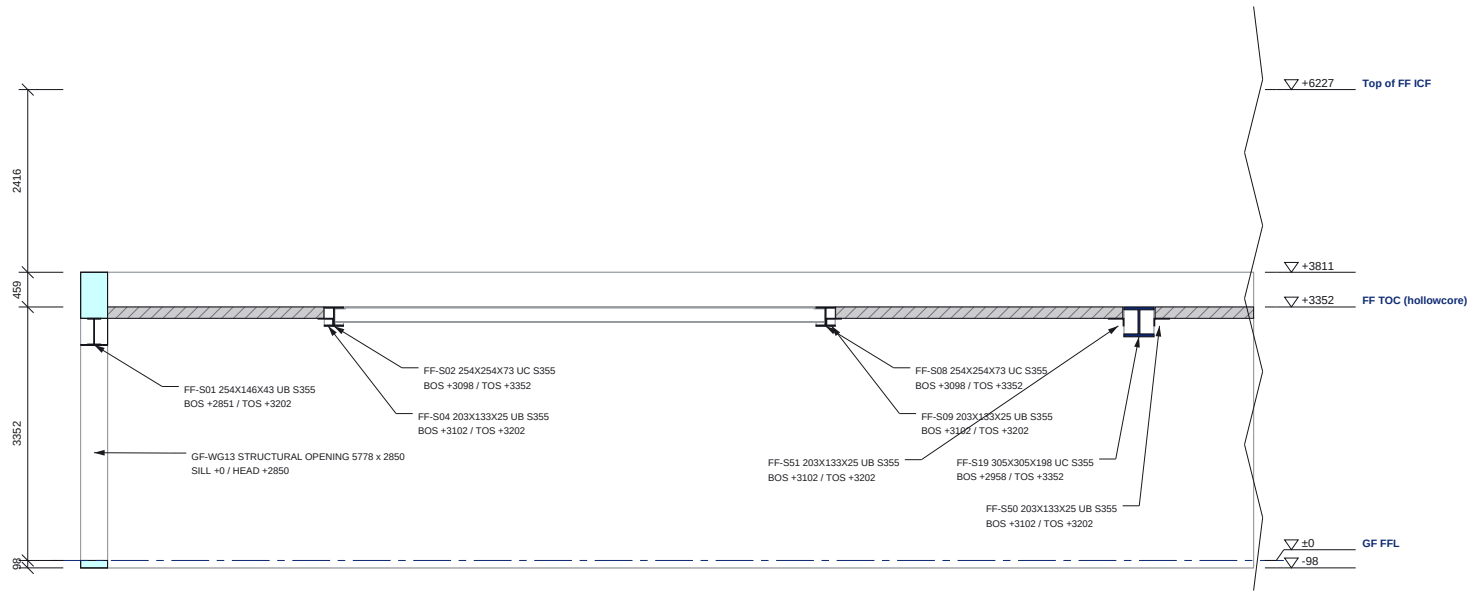

SECTION D-D (PART 1 OF 2)

Scale 1:100 @ A3 | Looking east; levels above GF FFL

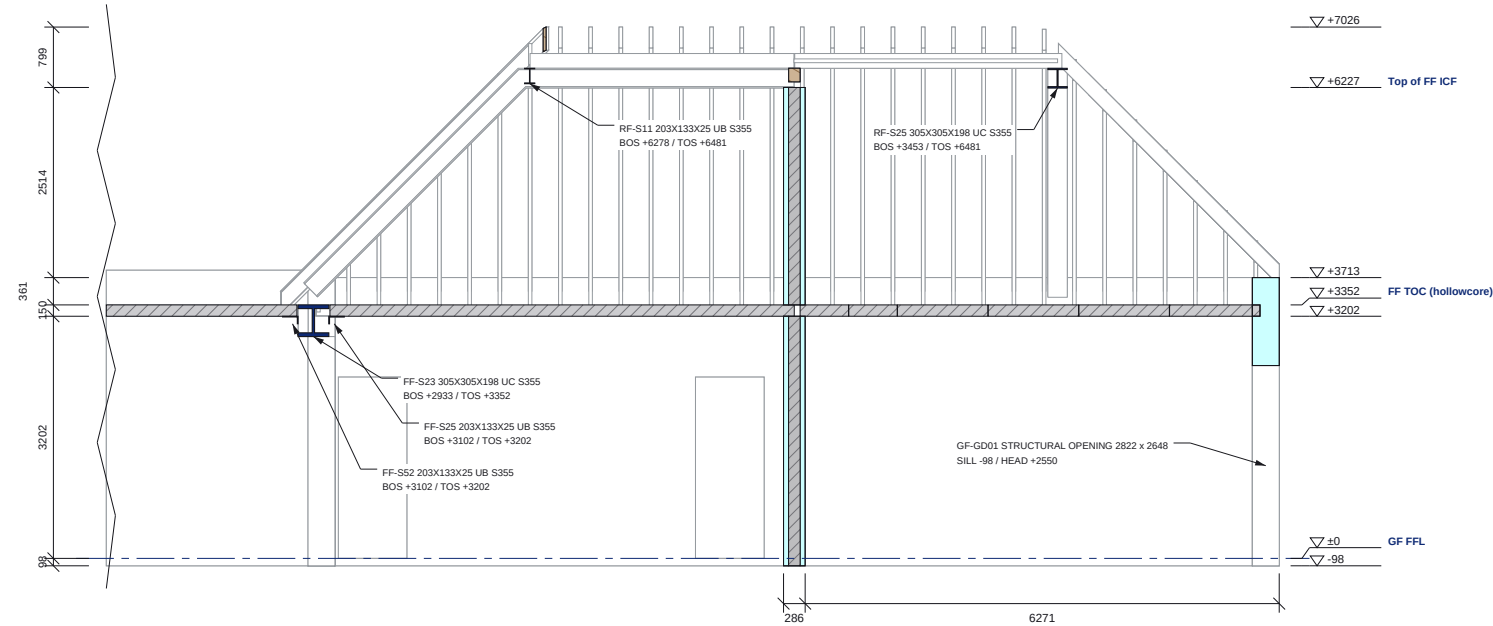

SECTION D-D (PART 2 OF 2)

Scale 1:100 @ A3 | Looking east; levels above GF FFL

- Do not scale. All dimensions in mm. Check all dimensions on site.
- ICF EPS (cut)
  - ICF concrete core / RC (cut)
  - Steel (cut)
  - Masonry wall (cut)
  - Beyond the cut (line work)



SECTION D-D SCHEDULES


LEVELS ON THIS SECTION

| Level                | FFL   | AOD     |
|----------------------|-------|---------|
| underside of ICF     | -98   | 168.650 |
| GF FFL               | 0     | 168.748 |
| top of ICF           | +3202 | 171.950 |
| FF TOC (hollowcore)  | +3352 | 172.100 |
| top of ICF           | +3713 | 172.461 |
| top of ICF           | +3811 | 172.559 |
| Top of FF ICF        | +6227 | 174.975 |
| top of roof build-up | +7026 | 175.774 |

STEEL CUT BY THIS SECTION

| Mark   | Section (engineer)  | BOS   | TOS   |
|--------|---------------------|-------|-------|
| FF-S01 | 254x146x43 UB S355  | +2851 | +3202 |
| FF-S02 | 254x254x73 UC S355  | +3098 | +3352 |
| FF-S04 | 203x133x25 UB S355  | +3102 | +3202 |
| FF-S08 | 254x254x73 UC S355  | +3098 | +3352 |
| FF-S09 | 203x133x25 UB S355  | +3102 | +3202 |
| FF-S19 | 305x305x198 UC S355 | +2958 | +3352 |
| FF-S23 | 305x305x198 UC S355 | +2933 | +3352 |
| FF-S25 | 203x133x25 UB S355  | +3102 | +3202 |
| FF-S52 | 203x133x25 UB S355  | +3102 | +3202 |
| FF-S50 | 203x133x25 UB S355  | +3102 | +3202 |
| FF-S51 | 203x133x25 UB S355  | +3102 | +3202 |
| RF-S11 | 203x133x25 UB S355  | +6278 | +6481 |
| RF-S25 | 305x305x198 UC S355 | +3453 | +6481 |

SECTION KEY

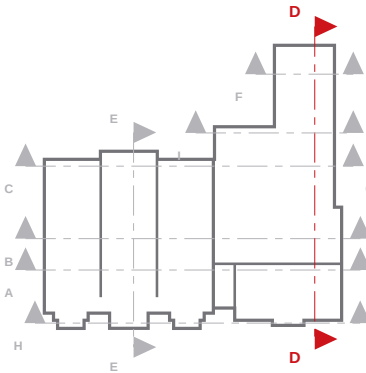

NOTES

- Section D-D is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
- Levels above GF FFL (168.748 AOD); the level table gives AOD.
- ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
- Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02.

REVISIONS

| REV | DATE     | DESCRIPTION    |
|-----|----------|----------------|
| P01 | 23.09.26 | Approval issue |



|           |          |
|-----------|----------|
| CLIENT    | PROJECT  |
| ICF Homes | Dendrons |

|               |
|---------------|
| DRAWING TITLE |
| SECTION D-D   |

ICF section with levels and build-ups

|       |      |          |       |
|-------|------|----------|-------|
| SCALE | SIZE | DATE     | DRAWN |
| 1:100 | A3   | 23.09.26 | TS    |

|              |                 |     |
|--------------|-----------------|-----|
| STATUS       | DRAWING No.     | REV |
| FOR APPROVAL | UKPCS-003-SE-04 | P01 |