

SECTION E-E SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-98	168.650
GF FFL	0	168.748
FF TOC (hollowcore)	+3352	172.100
top of ICF	+3560	172.308
top of ICF	+3900	172.648
Top of FF ICF	+6227	174.975
top of ICF	+8724	177.472
top of roof build-up	+9280	178.028
top of ICF	+9287	178.035
Roof plateau TOS	+9492	178.240

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S27	152x152x37 UC S355	+2999	+3202
FF-S34	152x152x37 UC S355	+2999	+3202
FF-S48	305x305x118 UC S355	+2894	+3202
RF-S01	254x146x43 UB S355	+6075	+9581
RF-S03	254x254x73 UC S355	+9194	+9454
RF-S07	254x254x73 UC S355	+9232	+9492
RF-S14	203x133x25 UB S355	+9289	+9492
RF-S20	203x133x25 UB S355	+9085	+9288
RF-S36b	254x146x43 UB S355	+6423	+8863
SF-S01	254x254x73 UC S355	+6214	+6481
SF-S02	254x254x73 UC S355	+6214	+6481

SECTION KEY

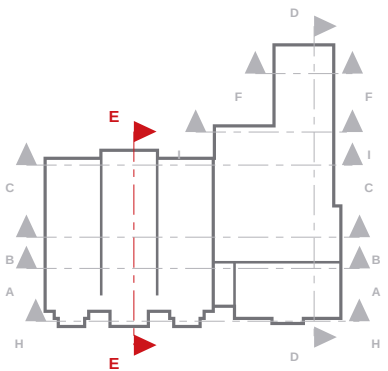

NOTES

- Section E-E is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
- Levels above GF FFL (168.748 AOD); the level table gives AOD.
- ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
- Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue




CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE
SECTION E-E
ICF section with levels and build-ups

SCALE	SIZE	DATE	DRAWN
1:100	A3	23.09.26	TS

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-SE-05	P01

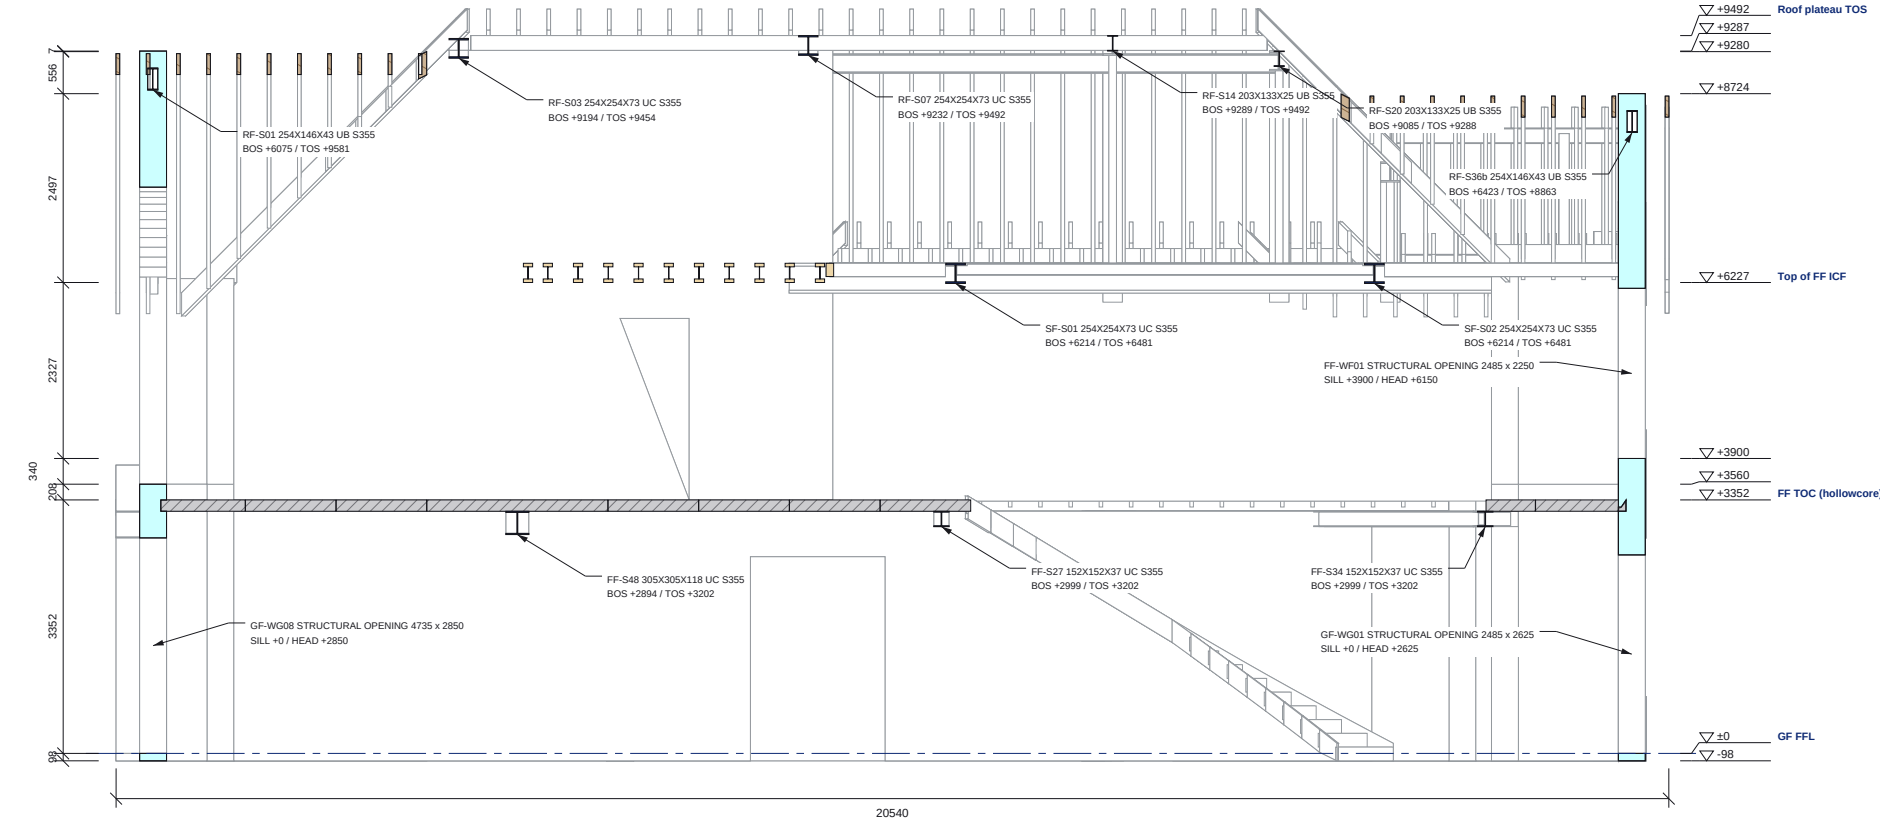

SECTION E-E

Scale 1:100 @ A3 | Looking east; levels above GF FFL

- ICF EPS (cut)
- ICF concrete core / RC (cut)
- Steel (cut)
- Masonry wall (cut)
- Beyond the cut (line work)

