

Approval Drawings

ICF general arrangements, steel over ICF, elevations, sections and the questions for the engineer

Icf Homes - Dendrons

ISSUED	24.09.26
SHEETS	15
DRAWN BY	BuildEase

NOTES ON THIS ISSUE

1. Structural grids are not shown: the architect's plan DXF is not registered on this issue. Setting out is by the perimeter dimension rows and the check diagonals between external ICF corners.
2. Lintel marks are not shown: the engineer's PDF set is not registered on this issue. Every ICF opening carries the RC lintel of Tier Consult S-120 / S-121 (schedule in the model); steel over an opening is named on the plan and in the schedule. Steel marks and sections are the engineer's numbering as modelled.
3. Steel members, floors, roof timbers, the main stair and the blockwork lift shaft / secondary-stair enclosure are read from the coordinated model. The secondary stair flight beside the lift is not modelled (EQ-03).
4. 37 short wall elements (bay side walls with modelled voids, short returns and the north-bay side walls) carry no ICF forms of their own in the model; they are shown as walls at the plan cut and are pre-existing in the model.
5. Seven questions for the structural engineer (EQ-01 to EQ-07) are open on sheet UKPCS-003-EQ-01; the red EQ tags on the general arrangements link to them.

CONTENTS

SHEET	TITLE	PAGE
UKPCS-003-GA-01	GF ICF General Arrangement	3
UKPCS-003-GA-02	FF ICF General Arrangement	4
UKPCS-003-GS-01	GF Steel over ICF	5
UKPCS-003-GS-02	FF Steel over ICF	6
UKPCS-003-EL-01	North and South Elevations	7
UKPCS-003-EL-02	East and West Elevations	8
UKPCS-003-SE-01	Section A-A	9
UKPCS-003-SE-02	Section B-B	10
UKPCS-003-SE-03	Section C-C	11
UKPCS-003-SE-04	Section D-D	12
UKPCS-003-SE-05	Section E-E	13
UKPCS-003-SE-06	Section F-F	14
UKPCS-003-SE-07	Section H-H	15
UKPCS-003-SE-08	Section I-I	16
UKPCS-003-EQ-01	Questions for the Engineer	17

Do not scale. All dimensions in mm. Check all dimensions on site.




- EPS insulation (Nudura form)
- Concrete core
- End cap at opening
- Load-bearing masonry wall (context)
- Engineer's pier bars (n-H12 vertical bars @ ICF pier) / WS wall starters
- Setting-out check diagonal (external ICF corners)
- Section line (see SE sheet)

GF ICF PLAN

Scale 1:100 @ A2 | Plan cut at +1382



FOR APPROVAL - NOT FOR CONSTRUCTION

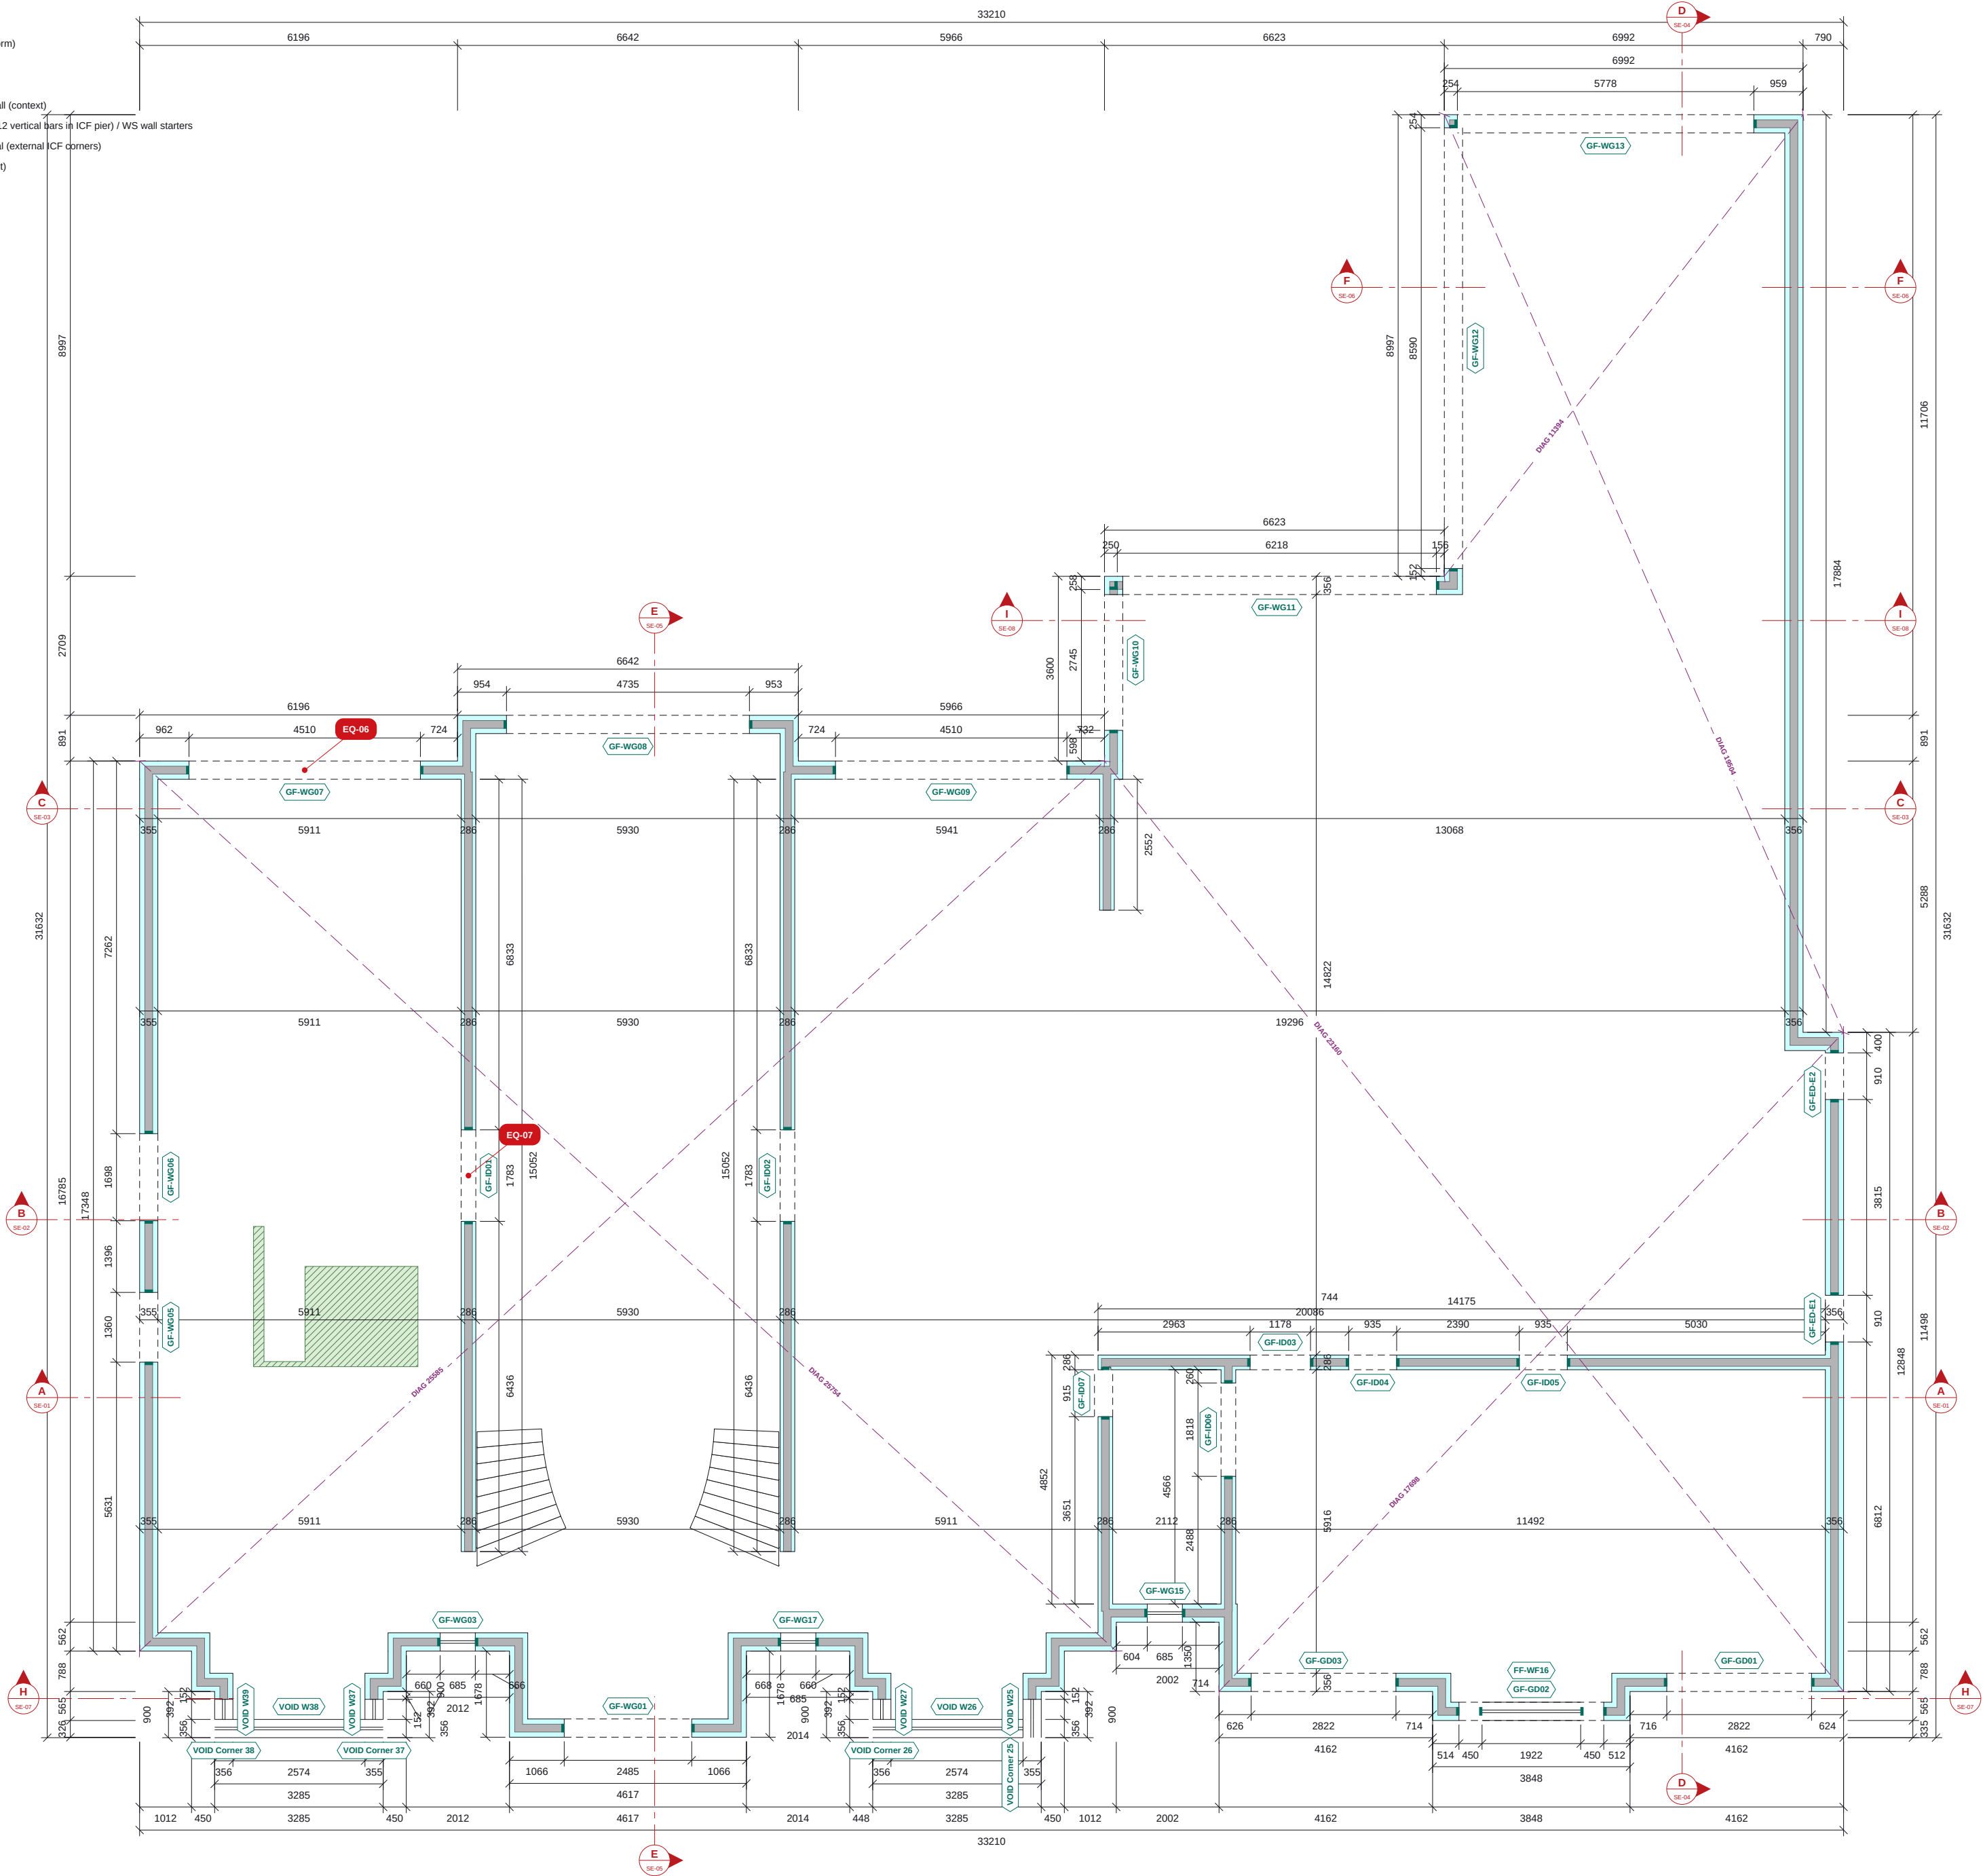

GF ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
FF-WF16	1922	1800	+3675	+5475	-
GF-ED-E1	910	2400	0	+2400	-
GF-ED-E2	910	2400	0	+2400	-
GF-GD01	2822	2648	-98	+2550	-
GF-GD02	2822	2648	-98	+2550	-
GF-GD03	2822	2648	-98	+2550	-
GF-ID01	1783	2700	-98	+2602	-
GF-ID02	1783	2700	-98	+2602	-
GF-ID03	1178	2700	-98	+2602	-
GF-ID04	935	2700	-98	+2602	-
GF-ID05	935	2700	-98	+2602	-
GF-ID06	1818	2700	-98	+2602	-
GF-ID07	915	2700	-98	+2602	-
GF-WG01	2485	2625	0	+2625	-
GF-WG03	685	2100	+750	+2850	-
GF-WG05	1360	2850	0	+2850	-
GF-WG06	1698	2850	0	+2850	-
GF-WG07	4510	2850	0	+2850	-
GF-WG08	4735	2850	0	+2850	-
GF-WG09	4510	2850	0	+2850	-
GF-WG10	2745	2850	0	+2850	-
GF-WG11	6218	2850	0	+2850	-
GF-WG12	8590	2850	0	+2850	-
GF-WG13	5778	2850	0	+2850	-
GF-WG15	685	1950	+900	+2850	-
GF-WG17	685	2100	+750	+2850	-
VOID Corner 25	356	2250	+752	+3002	-
VOID Corner 26	356	2250	+752	+3002	-
VOID Corner 27	356	2250	+752	+3002	-
VOID Corner 28	356	2250	+752	+3002	-
VOID W25	392	2250	+752	+3002	-
VOID W26	2574	2100	+752	+2852	-
VOID W27	392	2250	+752	+3002	-
VOID W37	392	2250	+752	+3002	-
VOID W38	2574	2100	+752	+2852	-
VOID W39	392	2250	+752	+3002	-

Structural openings in the ICF, sill and head above GF FFL. VOID = subtract cut in the ICF (no end caps / lintel buck modelled).

NOTES

- ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
- Levels above GF FFL (168.748 AOD). Sill / head = structural opening in the ICF.
- ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
- Lintel (L-n) and steel (B-n, C-1) marks from Tier Consult 078-TCE-DEN-XX-DR-S-096.210 rev -, which takes precedence. Red EQ tags = queries to the engineer on UKPCS-003-EQ-01 (click to open).
- Masonry walls shown for context.
- Steel over the ICF: see UKPCS-003-GS-01.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue



CLIENT
ICF Homes

PROJECT
Dendrons

DRAWING TITLE
GF ICF GENERAL ARRANGEMENT

ICF walls, openings and setting out

SCALE 1:100	SIZE A2	DATE 23.09.26	DRAWN TS
----------------	------------	------------------	-------------

STATUS FOR APPROVAL	DRAWING No.	REV
UKPCS-003-GA-01		P01



FOR APPROVAL - NOT FOR CONSTRUCTION

FF ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
FF-ID01	915	2400	+3352	+5752	-
FF-ID02	915	2400	+3352	+5752	-
FF-WF01	2485	2250	+3900	+6150	-
FF-WF02	685	1650	+4275	+5925	-
FF-WF04	1135	1650	+4275	+5925	-
FF-WF05	2710	2060	+3865	+5925	-
FF-WF11	2710	2025	+3900	+5925	-
FF-WF19	685	1650	+4275	+5925	-
FF-WF20	685	1650	+4275	+5925	-

Structural openings in the ICF; sill and head above GF FFL.

NOTES

- ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
- Levels above GF FFL (168.748 AOD). Sill / head = structural opening in the ICF.
- ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
- Lintel (L-n) and steel (B-n, C-1) marks from Tier Consult 078-TCE-DEN-XX-DR-S-096.210 rev -, which takes precedence. Red EQ tags = queries to the engineer on UKPCS-003-EQ-01 (click to open).
- Masonry walls shown for context.
- Steel over the ICF: see UKPCS-003-GS-02.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue



CLIENT

ICF Homes

PROJECT

Dendrons

DRAWING TITLE

FF ICF GENERAL ARRANGEMENT

ICF walls, openings and setting out

SCALE	SIZE	DATE	DRAWN
1:100	A2	23.09.26	TS

STATUS	DRAWING No.	REV
--------	-------------	-----

FOR APPROVAL

UKPCS-003-GA-02

P01

- EPS insulation (Nudura form)
- Concrete core
- End cap at opening
- Load-bearing masonry wall (context)
- ICF walls of the level below (dashed)
- Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
- Setting-out check diagonal (external ICF corners)
- Section line (see SE sheet)

FF ICF PLAN

Scale 1:100 @ A2 | Plan cut at +4237



Do not scale. All dimensions in mm. Check all dimensions on site.

Do not scale. All dimensions in mm. Check all dimensions on site.




- ICF wall at the plan cut (see the ICF sheet)
- Load-bearing masonry wall (context)
- Steel over (dashed), marked
- Steel column cut
- Engineer's pier bars (n-H12 vertical bars in ICF pier) | WS wall starters
- Section line (see SE sheet)

GF STEEL OVER ICF

Scale 1:100 @ A2 | Plan cut at +1382



FOR APPROVAL - NOT FOR CONSTRUCTION

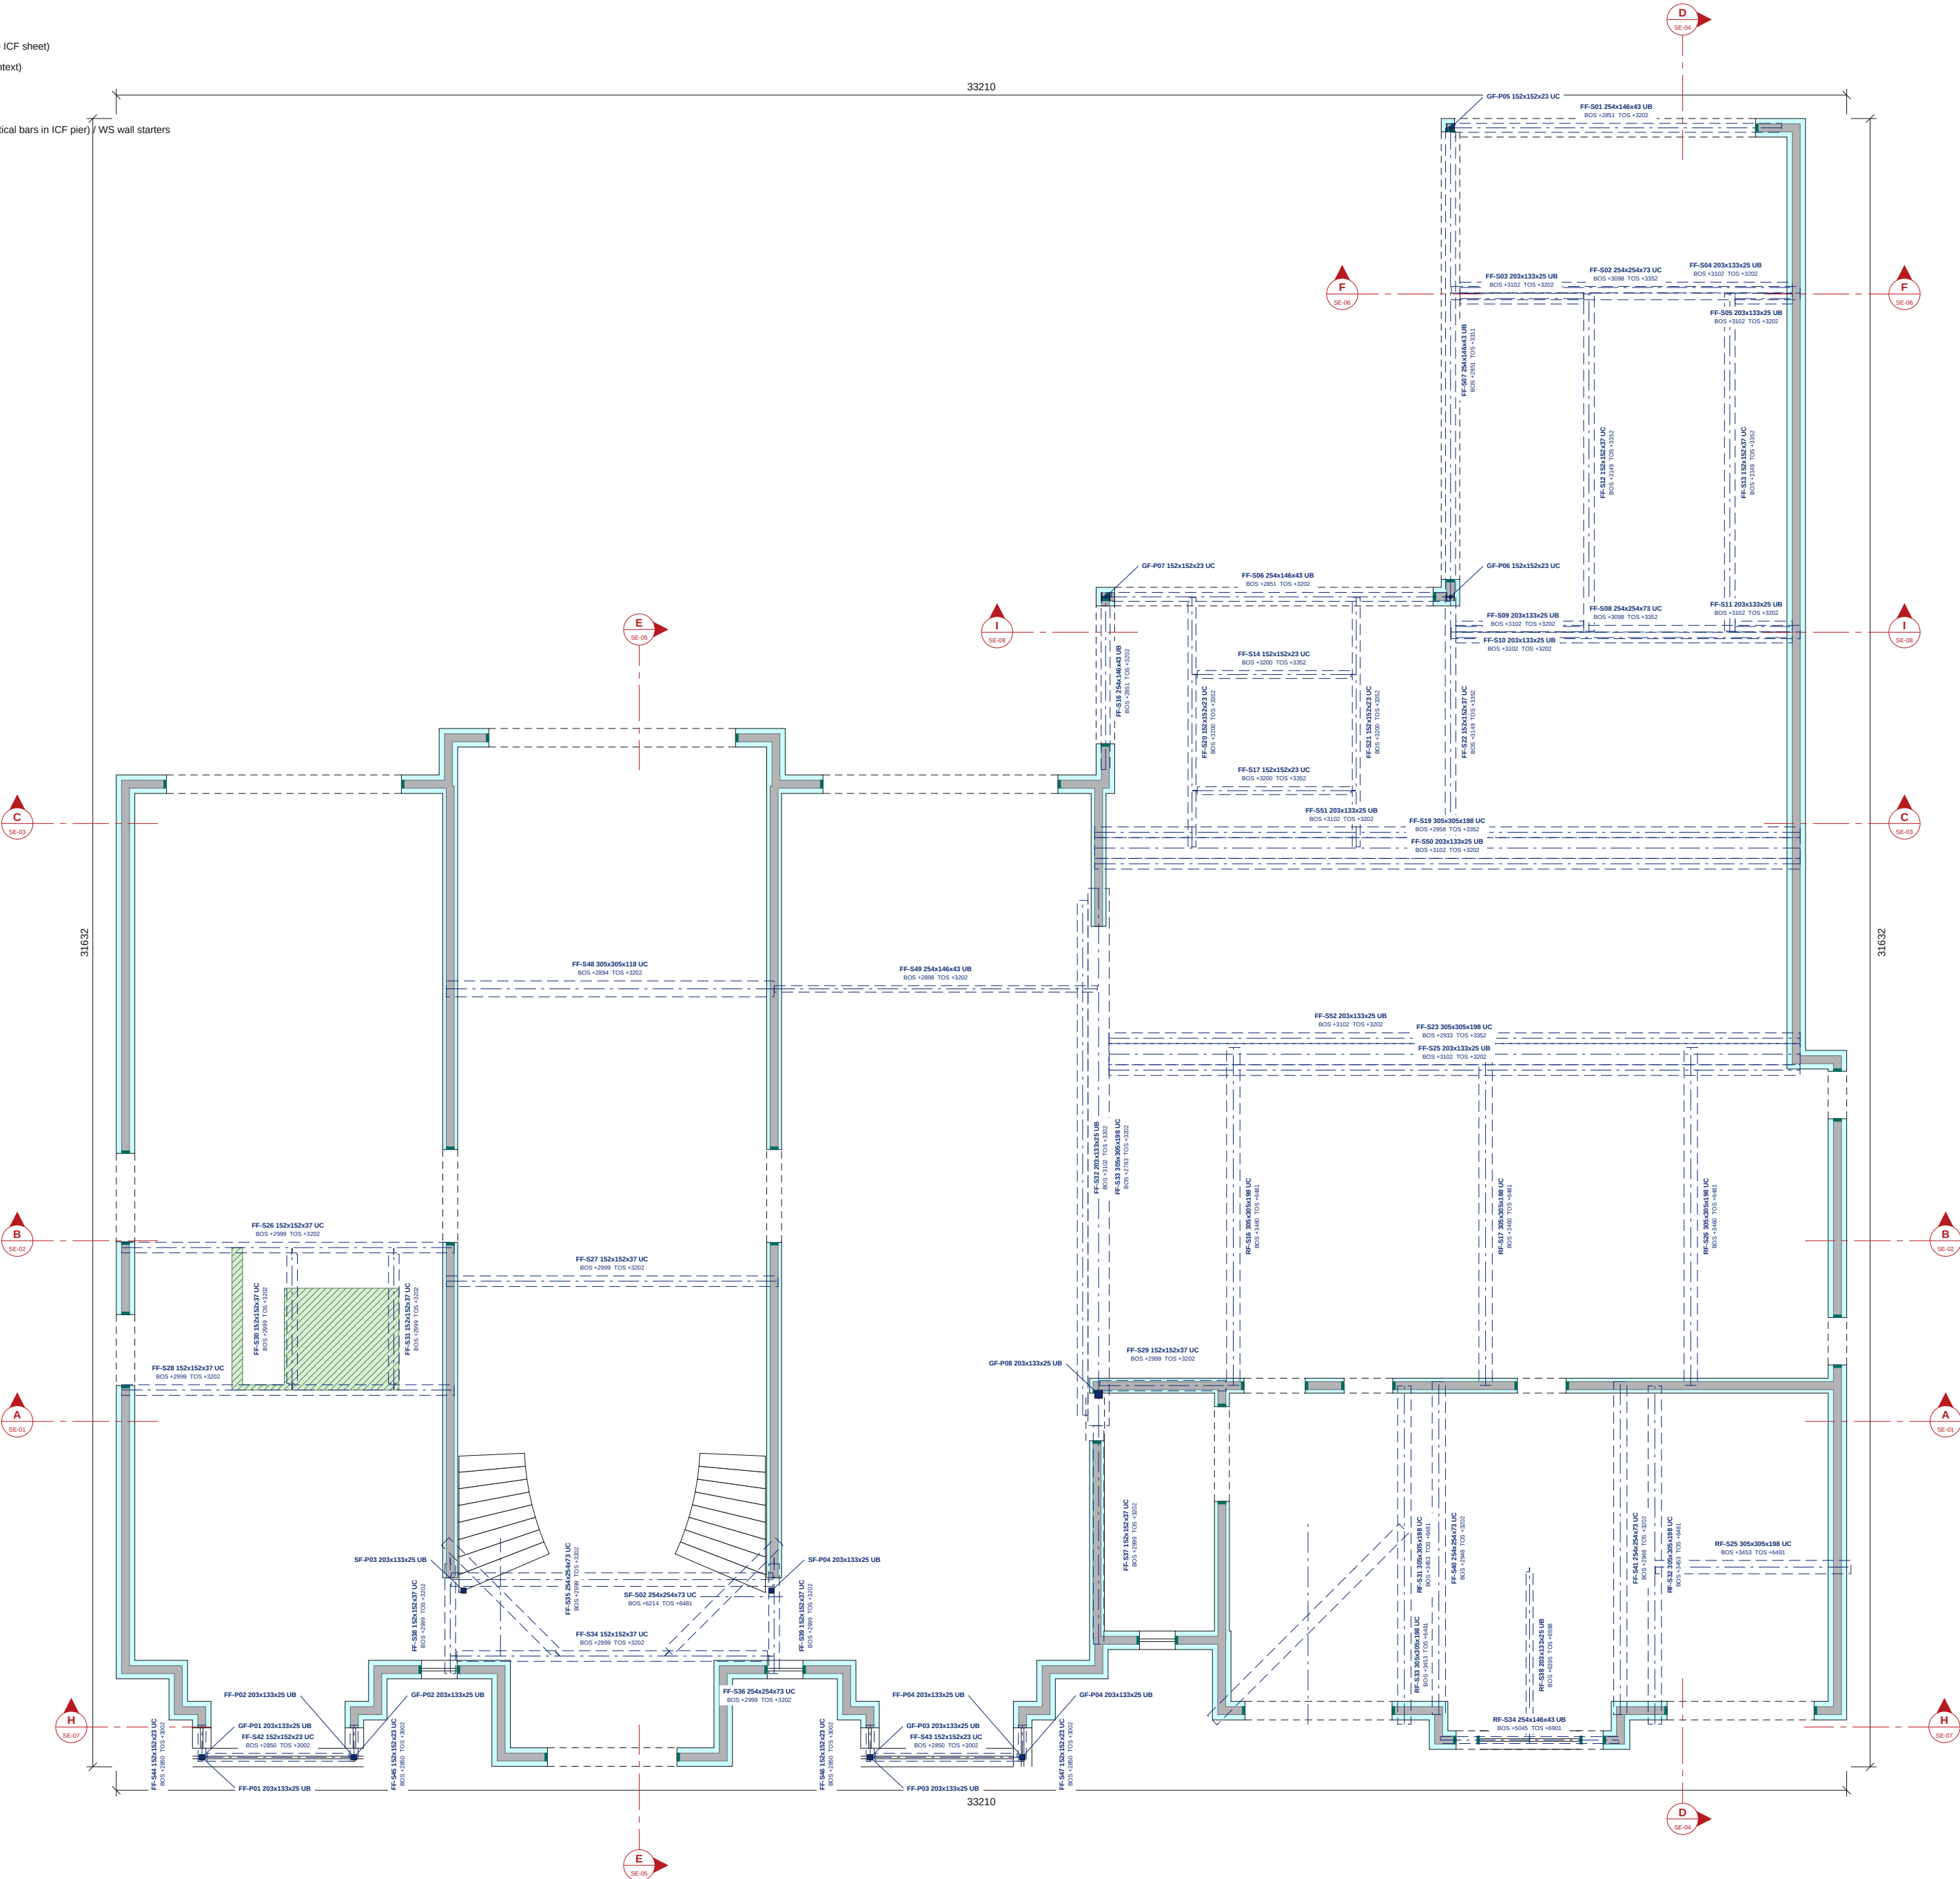

GF STEEL SCHEDULE

STEEL SCHEDULE		BOS	TOS
Mark	Section (engineer)		
FF-S01	254x146x43 UB S355	+2851	+3202
FF-S02	254x254x73 UC S355	+3098	+3352
FF-S03	203x133x25 UB S355	+3102	+3202
FF-S04	203x133x25 UB S355	+3102	+3202
FF-S05	203x133x25 UB S355	+3102	+3202
FF-S06	254x146x43 UB S355	+2851	+3202
FF-S07	254x146x43 UB S355	+2851	+3311
FF-S08	254x254x73 UC S355	+3098	+3352
FF-S09	203x133x25 UB S355	+3102	+3202
FF-S10	203x133x25 UB S355	+3102	+3202
FF-S11	203x133x25 UB S355	+3102	+3202
FF-S12	152x152x37 UC S355	+3149	+3352
FF-S13	152x152x37 UC S355	+3149	+3352
FF-S14	152x152x23 UC S355	+3200	+3352
FF-S16	254x146x43 UB S355	+2851	+3202
FF-S17	152x152x23 UC S355	+3200	+3352
FF-S19	305x305x198 UC S355	+2958	+3352
FF-S20	152x152x23 UC S355	+3200	+3352
FF-S21	152x152x23 UC S355	+3200	+3352
FF-S22	152x152x37 UC S355	+3149	+3352
FF-S23	305x305x198 UC S355	+2933	+3352
FF-S25	203x133x25 UB S355	+3102	+3202
FF-S26	152x152x37 UC S355	+2999	+3202
FF-S27	152x152x37 UC S355	+2999	+3202
FF-S28	152x152x37 UC S355	+2999	+3202
FF-S29	152x152x37 UC S355	+2999	+3202
FF-S30	152x152x37 UC S355	+2999	+3202
FF-S31	152x152x37 UC S355	+2999	+3202
FF-S32	203x133x25 UB S355	+3102	+3202
FF-S33	305x305x198 UC S355	+2783	+3202
FF-S34	152x152x37 UC S355	+2999	+3202
FF-S35	254x254x73 UC S355	+2999	+3202
FF-S36	254x254x73 UC S355	+2999	+3202
FF-S37	152x152x37 UC S355	+2999	+3202
FF-S38	152x152x37 UC S355	+2999	+3202
FF-S39	152x152x37 UC S355	+2999	+3202
FF-S40	254x254x73 UC S355	+2948	+3202
FF-S41	254x254x73 UC S355	+2948	+3202
FF-S42	152x152x23 UC S355	+2850	+3002
FF-S43	152x152x23 UC S355	+2850	+3002
FF-S44	152x152x23 UC S355	+2850	+3002
FF-S45	152x152x23 UC S355	+2850	+3002
FF-S46	152x152x23 UC S355	+2850	+3002
FF-S47	152x152x23 UC S355	+2850	+3002
FF-S48	305x305x118 UC S355	+2894	+3202
FF-S49	254x146x43 UB S355	+2898	+3202
FF-S50	203x133x25 UB S355	+3102	+3202
FF-S51	203x133x25 UB S355	+3102	+3202
FF-S52	203x133x25 UB S355	+3102	+3202
RF-S16	305x305x198 UC S355	+3460	+6481
RF-S17	305x305x198 UC S355	+3460	+6481
RF-S25	305x305x198 UC S355	+3453	+6481
RF-S26	305x305x198 UC S355	+3460	+6481
RF-S31	305x305x198 UC S355	+3453	+6481
RF-S32	305x305x198 UC S355	+3453	+6481
RF-S33	305x305x198 UC S355	+3453	+6481
RF-S34	254x146x43 UB S355	+5045	+6901
RF-S38	203x133x25 UB S355	+6395	+6996
SF-S02	254x254x73 UC S355	+6214	+6481
FF-P01	203x133x25 UB S355	+3352	+5925
FF-P02	203x133x25 UB S355	+3352	+5925
FF-P03	203x133x25 UB S355	+3352	+5925
FF-P04	203x133x25 UB S355	+3352	+5925
GF-P01	203x133x25 UB S355	-98	+2850
GF-P02	203x133x25 UB S355	-98	+2850
GF-P03	203x133x25 UB S355	-98	+2850
GF-P04	203x133x25 UB S355	-98	+2850
GF-P05	152x152x23 UC S355	-98	+2851
GF-P06	152x152x23 UC S355	-98	+2851
GF-P07	152x152x23 UC S355	-98	+2851
GF-P08	203x133x25 UB S355	-98	+2783
SF-P03	203x133x25 UB S355	+6481	+7559
SF-P04	203x133x25 UB S355	+6481	+7559

BOS / TOS = bottom / top of steel above GF FFL (C-1 columns: base / top).

NOTES

- ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
- Lintel (L-n) and steel (B-n, C-1) marks from Tier Consult 078-TCE-DEN-XX-DR-S-096.210 rev -, which takes precedence. Red EQ tags = queries to the engineer on UKPCS-003-EQ-01 (click to open).
- Masonry walls shown for context.
- Steel over dashed. BOS / TOS = bottom / top of steel above GF FFL.
- Steel over the ICF at this level, dashed, with the engineer's member marks as modelled; BOS / TOS = bottom / top of steel above GF FFL. Columns cut at the plan level shown solid.
- Walls and openings: see UKPCS-003-GA-01 for the ICF setting out, opening sizes and the opening schedule.
- No structural grid is registered on this issue.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue



CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE

GF STEEL OVER ICF

Steel over the ICF, marked and scheduled

SCALE	SIZE	DATE	DRAWN
1:100	A2	23.09.26	TS

STATUS	DRAWING No.	REV
--------	-------------	-----


FOR APPROVAL

UKPCS-003-GS-01

P01



FOR APPROVAL - NOT FOR CONSTRUCTION

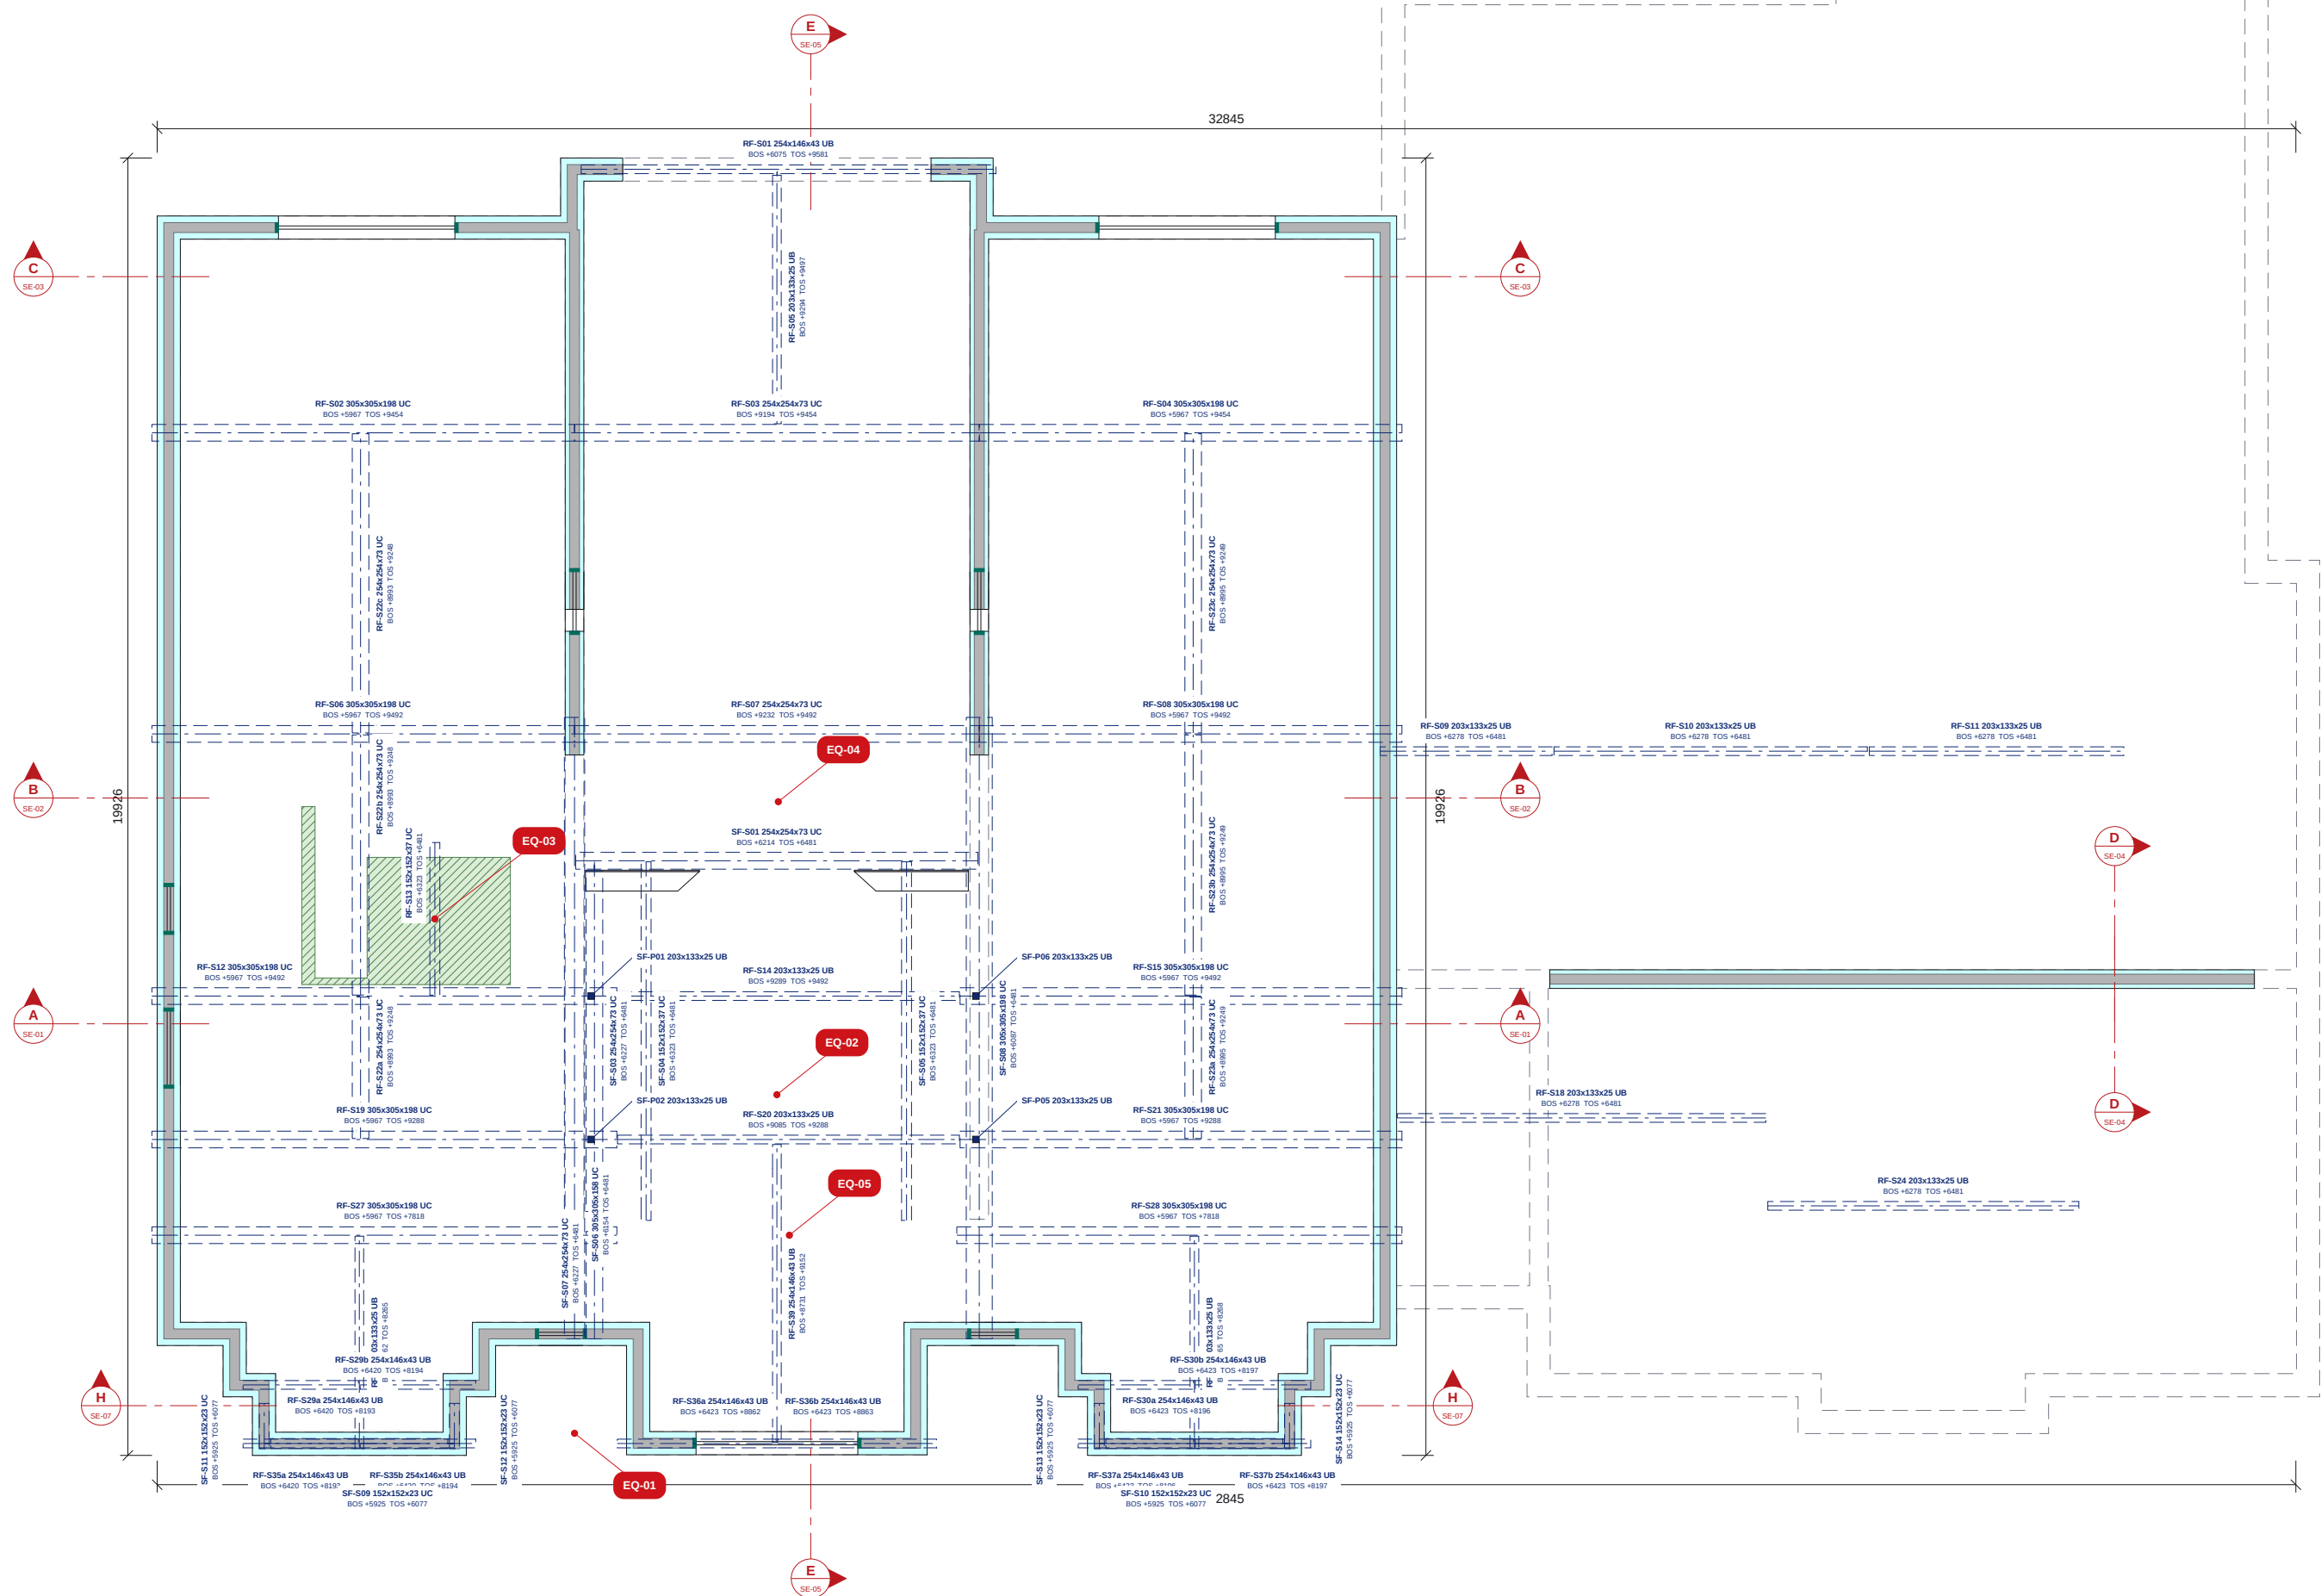

FF STEEL OVER ICF

Scale 1:100 @ A2 | Plan cut at +237

FF STEEL SCHEDULE

STEEL SCHEDULE

Mark	Section (engineer)	BOS	TOS
RF-S01	254x146x43 UB S355	+6075	+9581
RF-S02	305x305x198 UC S355	+5967	+9454
RF-S03	254x254x73 UC S355	+9194	+9454
RF-S04	305x305x198 UC S355	+5967	+9454
RF-S05	203x133x25 UB S355	+9294	+9497
RF-S06	305x305x198 UC S355	+5967	+9492
RF-S07	254x254x73 UC S355	+9232	+9492
RF-S08	305x305x198 UC S355	+5967	+9492
RF-S09	203x133x25 UB S355	+6278	+6481
RF-S10	203x133x25 UB S355	+6278	+6481
RF-S11	203x133x25 UB S355	+6278	+6481
RF-S12	305x305x198 UC S355	+5967	+9492
RF-S13	152x152x37 UC S355	+6323	+6481
RF-S14	203x133x25 UB S355	+9289	+9492
RF-S15	305x305x198 UC S355	+5967	+9492
RF-S18	203x133x25 UB S355	+6278	+6461
RF-S19	305x305x198 UC S355	+5967	+9288
RF-S20	203x133x25 UB S355	+9085	+9288
RF-S21	305x305x198 UC S355	+5967	+9288
RF-S22a	254x254x73 UC S355	+8993	+9248
RF-S22b	254x254x73 UC S355	+8993	+9248
RF-S22c	254x254x73 UC S355	+8993	+9248
RF-S23a	254x254x73 UC S355	+8995	+9249
RF-S23b	254x254x73 UC S355	+8995	+9249
RF-S23c	254x254x73 UC S355	+8995	+9249
RF-S24	203x133x25 UB S355	+6278	+6481
RF-S27	305x305x198 UC S355	+5967	+7818
RF-S28	305x305x198 UC S355	+5967	+7818
RF-S29a	254x146x43 UB S355	+6420	+8193
RF-S29b	254x146x43 UB S355	+6420	+8194
RF-S30a	254x146x43 UB S355	+6423	+8196
RF-S30b	254x146x43 UB S355	+6423	+8197
RF-S35a	254x146x43 UB S355	+6420	+8193
RF-S35b	254x146x43 UB S355	+6420	+8194
RF-S36a	254x146x43 UB S355	+6423	+8862
RF-S36b	254x146x43 UB S355	+6423	+8863
RF-S37a	254x146x43 UB S355	+6423	+8196
RF-S37b	254x146x43 UB S355	+6423	+8197
RF-S39	254x146x43 UB S355	+8731	+9152
RF-S40	203x133x25 UB S355	+8062	+8265
RF-S41	203x133x25 UB S355	+8065	+8268
SF-S01	254x254x73 UC S355	+6214	+6481
SF-S03	254x254x73 UC S355	+6227	+6481
SF-S04	152x152x37 UC S355	+6323	+6481
SF-S05	152x152x37 UC S355	+6323	+6481
SF-S06	305x305x158 UC S355	+6154	+6481
SF-S07	254x254x73 UC S355	+6227	+6481
SF-S08	305x305x198 UC S355	+6087	+6481
SF-S09	152x152x23 UC S355	+5925	+6077
SF-S10	152x152x23 UC S355	+5925	+6077
SF-S11	152x152x23 UC S355	+5925	+6077
SF-S12	152x152x23 UC S355	+5925	+6077
SF-S13	152x152x23 UC S355	+5925	+6077
SF-S14	152x152x23 UC S355	+5925	+6077
SF-P01	203x133x25 UB S355	+6481	+9232
SF-P02	203x133x25 UB S355	+6481	+9029
SF-P05	203x133x25 UB S355	+6481	+9029
SF-P06	203x133x25 UB S355	+6481	+9232

BOS / TOS = bottom / top of steel above GF FFL (C-1 columns: base / top).

NOTES

- ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
- Lintel (L-n) and steel (B-n, C-1) marks from Tier Consult 078-TCE-DEN-XX-DR-S-096.210 rev -, which takes precedence. Red EQ tags = queries to the engineer on UKPCS-003-EQ-01 (click to open).
- Masonry walls shown for context.
- Steel over dashed. BOS / TOS = bottom / top of steel above GF FFL.
- Steel over the ICF at this level, dashed, with the engineer's member marks as modelled: BOS / TOS = bottom / top of steel above GF FFL. Columns cut at the plan level shown solid.
- Walls and openings: see UKPCS-003-GA-02 for the ICF setting out, opening sizes and the opening schedule.
- No structural grid is registered on this issue.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue



CLIENT

ICF Homes

PROJECT

Dendrons

DRAWING TITLE

FF STEEL OVER ICF

Steel over the ICF, marked and scheduled

SCALE

1:100

SIZE

A2

DATE

23.09.26

DRAWN

TS

STATUS


FOR APPROVAL

DRAWING No.

UKPCS-003-GS-02


P01

FOR APPROVAL - NOT FOR CONSTRUCTION

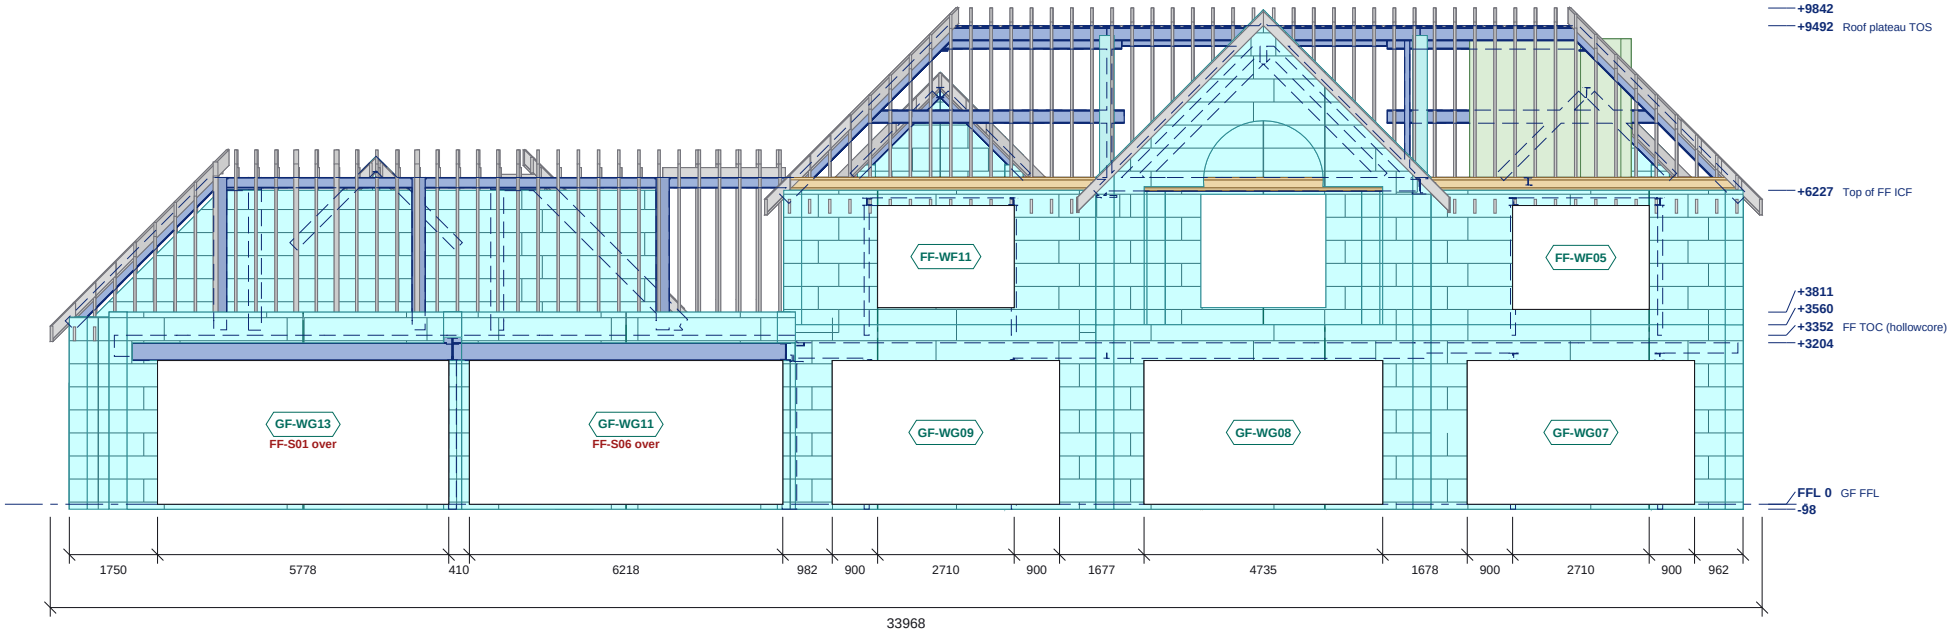


NORTH ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL (AOD in the schedule); sills and heads in the schedule

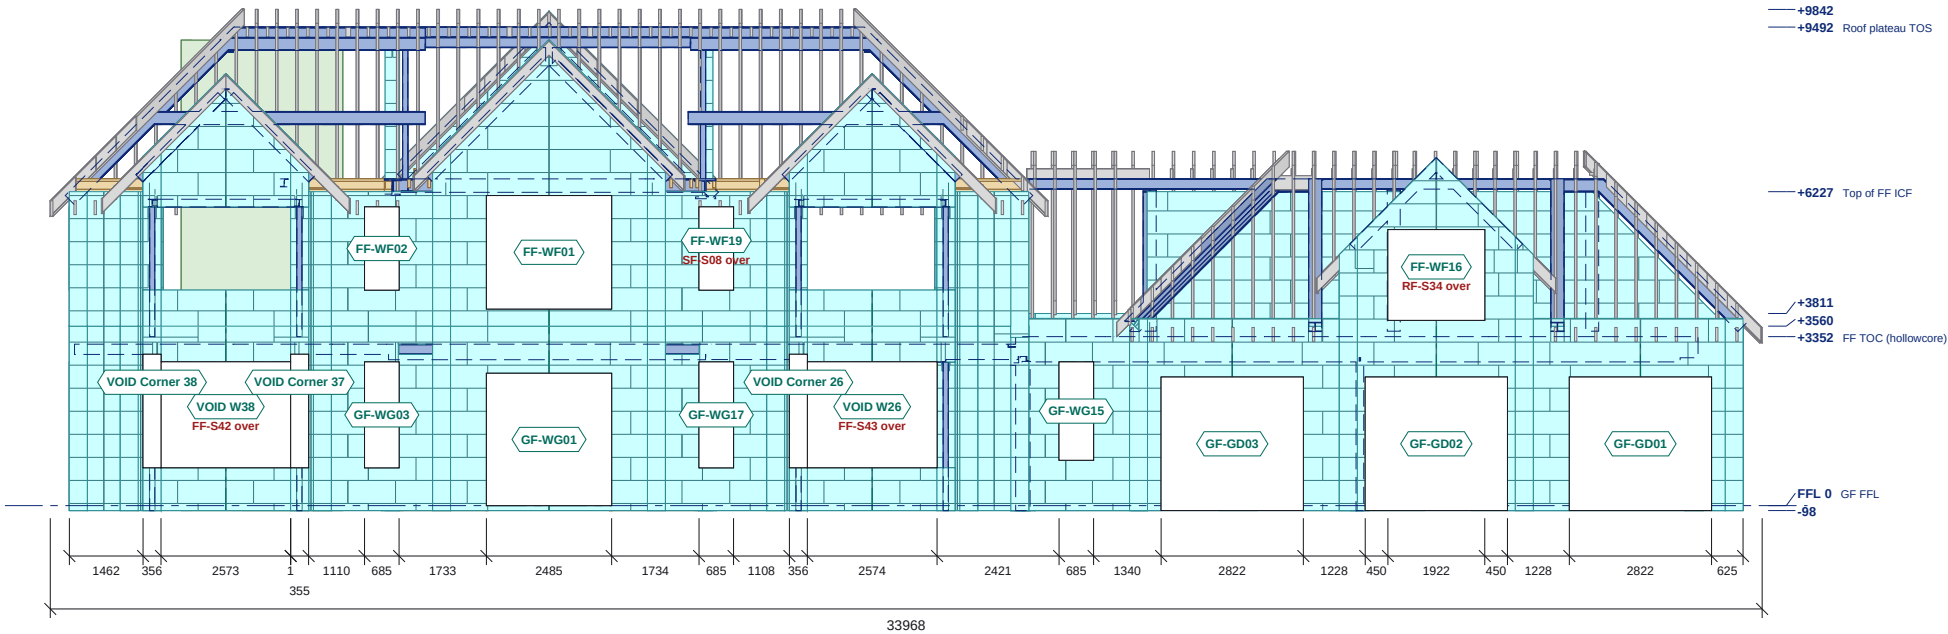

SOUTH ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL (AOD in the schedule); sills and heads in the schedule



- ICF external EPS face
- Block course joint
- Stack joint
- Steel
- Roof build-up (slab / earth / sedum)

ELEVATION SCHEDULES

NORTH ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
FF-WF05	2710	2060	+3865	+5925	-
FF-WF11	2710	2025	+3900	+5925	-
GF-WG07	4510	2850	0	+2850	-
GF-WG08	4735	2850	0	+2850	-
GF-WG09	4510	2850	0	+2850	-
GF-WG11	6218	2850	0	+2850	FF-S06 over
GF-WG13	5778	2850	0	+2850	FF-S01 over

Structural openings in the ICF; sill and head above GF FFL.

SOUTH ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
FF-WF01	2485	2250	+3900	+6150	-
FF-WF02	685	1650	+4275	+5925	-
FF-WF16	1922	1800	+3675	+5475	RF-S34 over
FF-WF19	685	1650	+4275	+5925	SF-S08 over
GF-GD01	2822	2648	-98	+2550	-
GF-GD02	2822	2648	-98	+2550	-
GF-GD03	2822	2648	-98	+2550	-
GF-WG01	2485	2625	0	+2625	-
GF-WG03	685	2100	+750	+2850	-
GF-WG15	685	1950	+900	+2850	-
GF-WG17	685	2100	+750	+2850	-
VOID Corner 26	356	2250	+752	+3002	-
VOID Corner 37	356	2250	+752	+3002	-
VOID Corner 38	356	2250	+752	+3002	-
VOID W26	2574	2100	+752	+2852	FF-S43 over
VOID W38	2574	2100	+752	+2852	FF-S42 over

Structural openings in the ICF; sill and head above GF FFL.

LEVELS ON THESE ELEVATIONS

Level	FFL	AOD
underside of ICF	-98	168.650
GF FFL	0	168.748
top of ICF	+3204	171.952
FF TOC (hollowcore)	+3352	172.100
top of ICF	+3560	172.308
top of ICF	+3811	172.559
Top of FF ICF	+6227	174.975
Roof plateau TOS	+9492	178.240
top of roof build-up	+9842	178.590

NOTES

- ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
- Levels above GF FFL (168.748 AOD). Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
- Steel, roof build-up and masonry shown as modelled.
- See UKPCS-003-GA-01 for plan setting out, lintels and steel.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue



CLIENT	PROJECT
ICF Homes	Dendrons


DRAWING TITLE
NORTH AND SOUTH ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE	DRAWN
1:150	A3	23.09.26	TS


STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-EL-01	P01

FOR APPROVAL - NOT FOR CONSTRUCTION

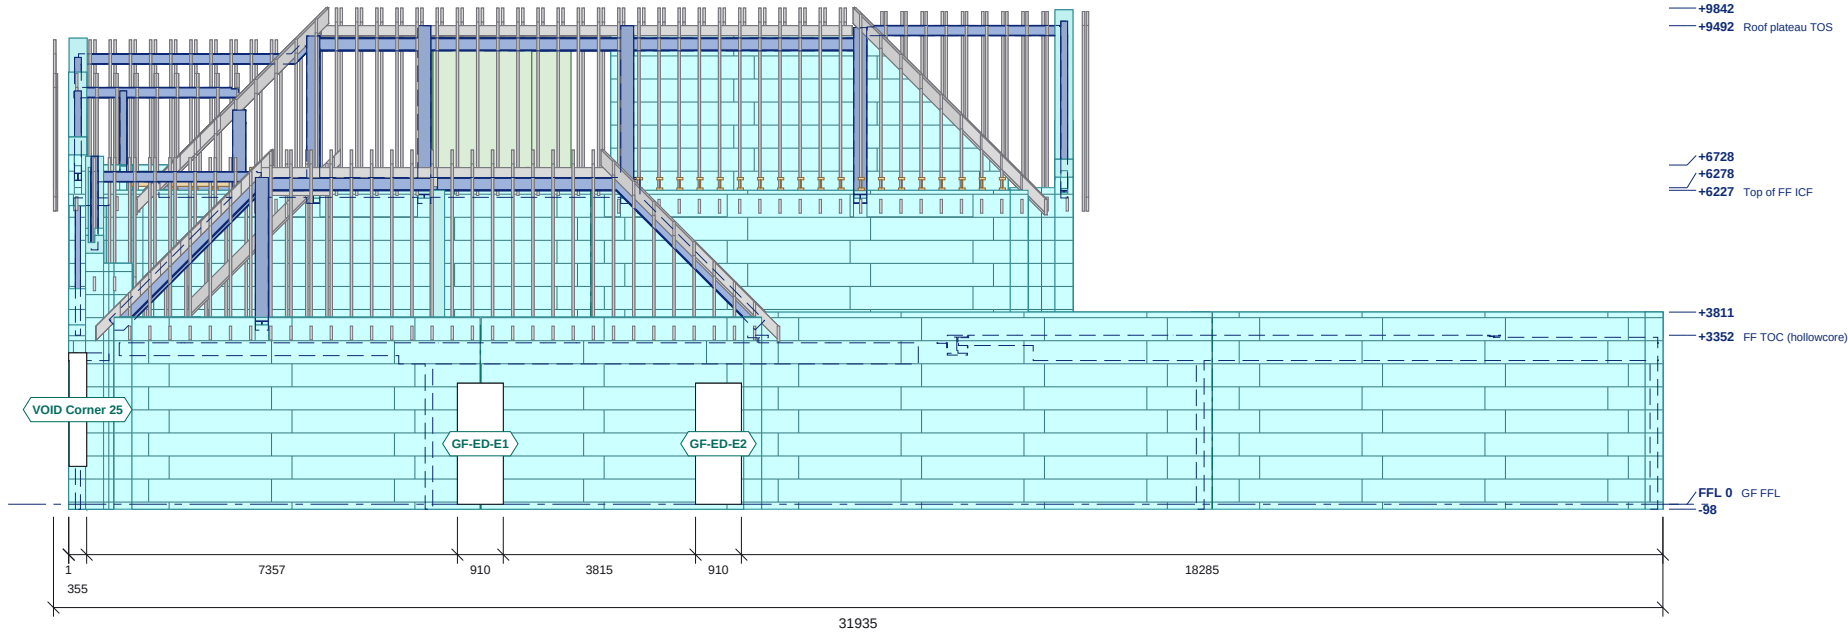

EAST ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL (AOD in the schedule); sills and heads in the schedule

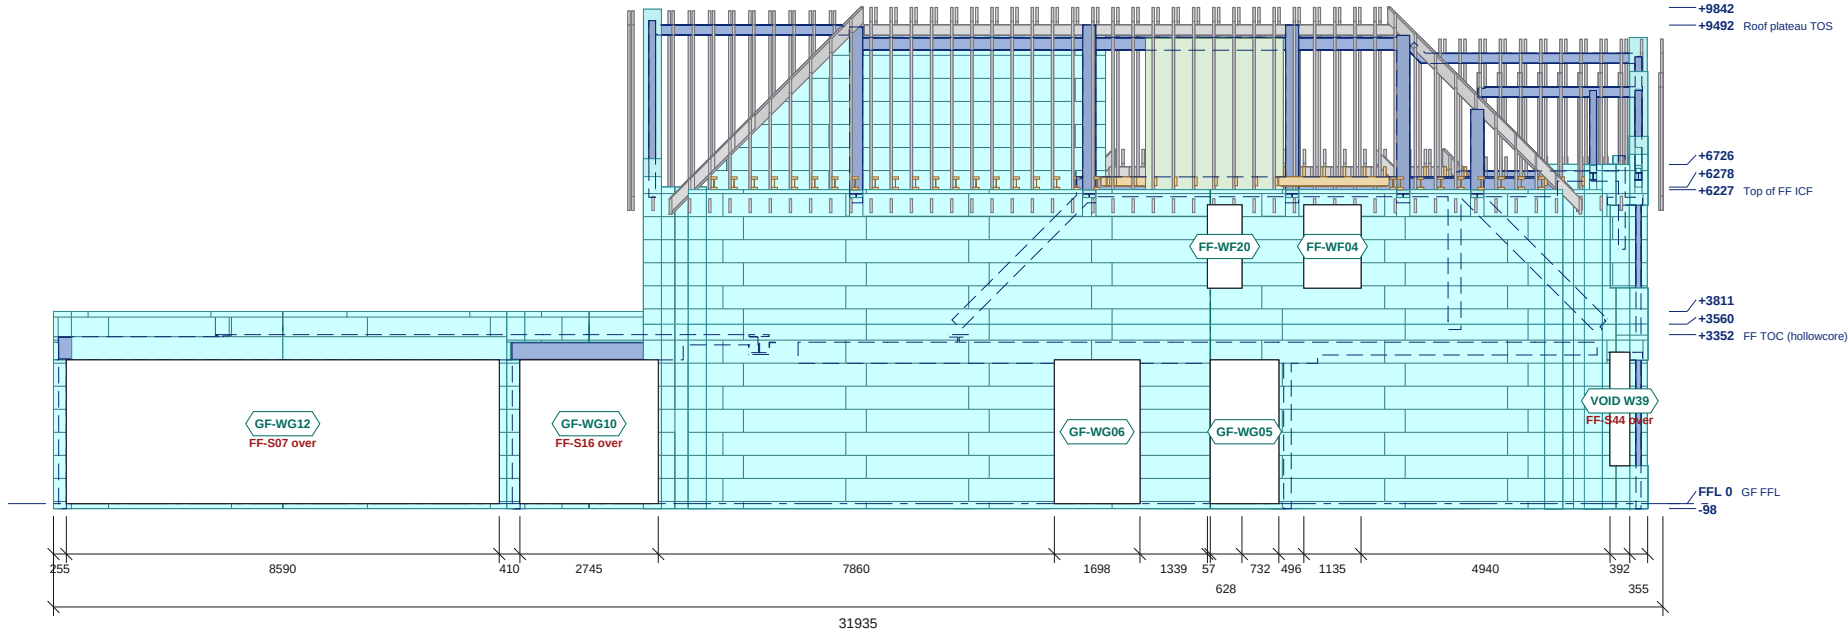

WEST ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL (AOD in the schedule); sills and heads in the schedule



- ICF external EPS face
- Block course joint
- Stack joint
- Steel
- Roof build-up (slab / earth / sedum)

ELEVATION SCHEDULES

EAST ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
GF-ED-E1	910	2400	0	+2400	-
GF-ED-E2	910	2400	0	+2400	-
VOID Corner 25	356	2250	+752	+3002	-

Structural openings in the ICF, sill and head above GF FFL.

WEST ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
FF-WF04	1135	1650	+4275	+5925	-
FF-WF20	685	1650	+4275	+5925	-
GF-WG05	1360	2850	0	+2850	-
GF-WG06	1698	2850	0	+2850	-
GF-WG10	2745	2850	0	+2850	FF-S16 over
GF-WG12	8590	2850	0	+2850	FF-S07 over
VOID W39	392	2250	+752	+3002	FF-S44 over

Structural openings in the ICF, sill and head above GF FFL.

EAST ELEVATION: LEVELS

Level	FFL	AOD
underside of ICF	-98	168.650
GF FFL	0	168.748
FF TOC (hollowcore)	+3352	172.100
top of ICF	+3811	172.559
Top of FF ICF	+6227	174.975
top of ICF	+6278	175.026
top of ICF	+6728	175.476
Roof plateau TOS	+9492	178.240
top of roof build-up	+9842	178.590

WEST ELEVATION: LEVELS

Level	FFL	AOD
underside of ICF	-98	168.650
GF FFL	0	168.748
FF TOC (hollowcore)	+3352	172.100
top of ICF	+3560	172.308
top of ICF	+3811	172.559
Top of FF ICF	+6227	174.975
top of ICF	+6278	175.026
top of ICF	+6726	175.474
Roof plateau TOS	+9492	178.240
top of roof build-up	+9842	178.590

NOTES

- ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
- Levels above GF FFL (168.748 AOD). Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
- Steel, roof build-up and masonry shown as modelled.
- See UKPCS-003-GA-01 for plan setting out, lintels and steel.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue



CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE


EAST AND WEST ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE	DRAWN
1:150	A3	23.09.26	TS


STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-EL-02	P01

FOR APPROVAL - NOT FOR CONSTRUCTION

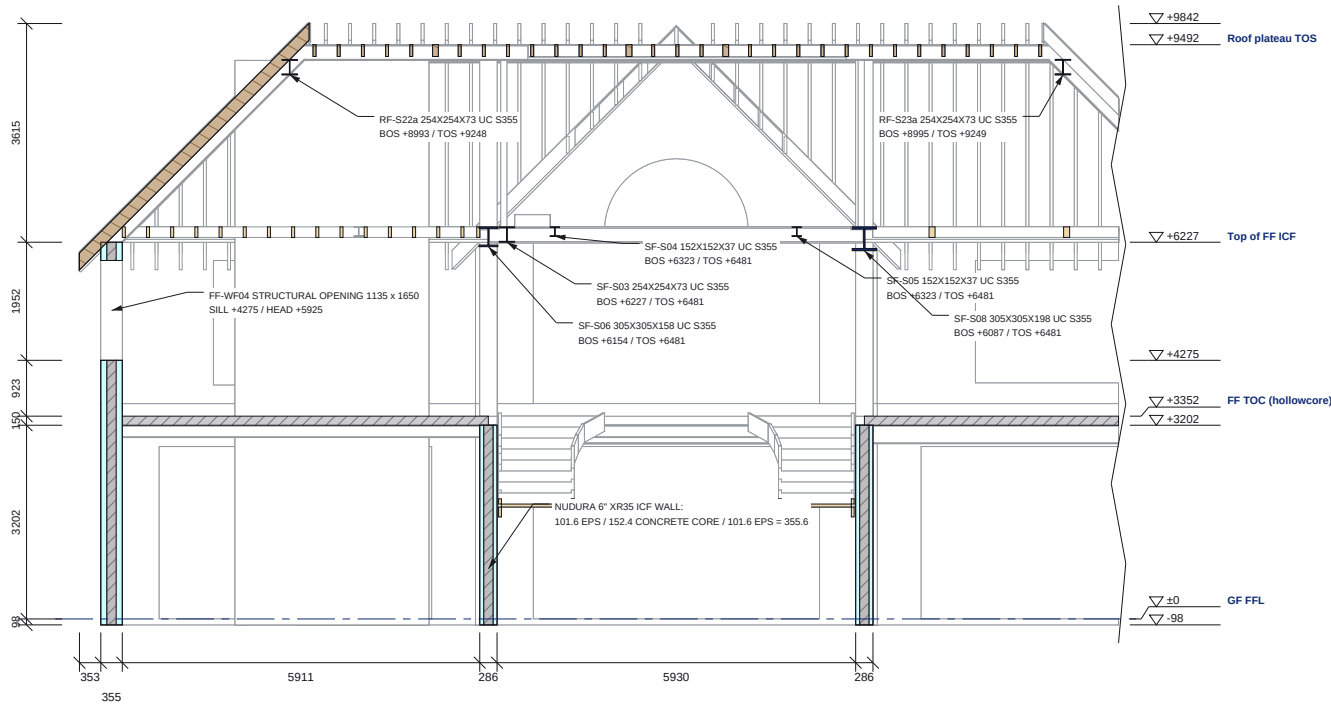

SECTION A-A (PART 1 OF 2)

Scale 1:125 @ A3 | Looking north; levels above GF FFL

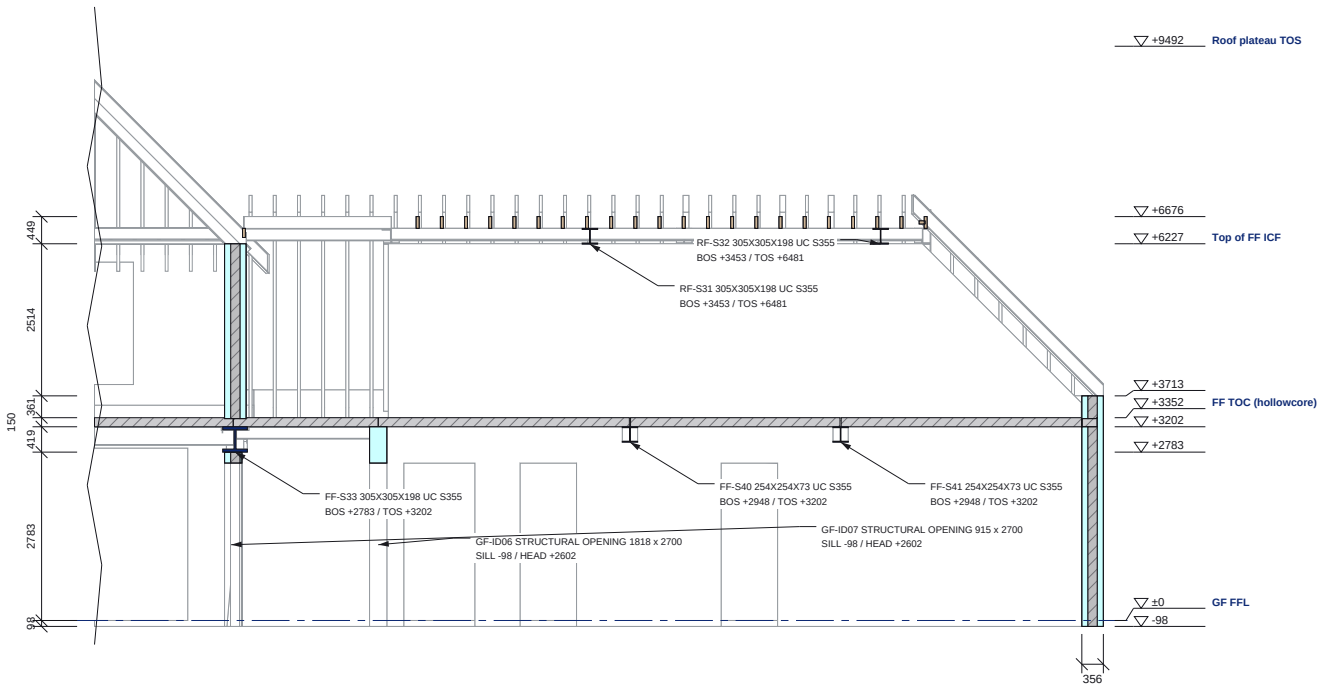

SECTION A-A (PART 2 OF 2)

Scale 1:125 @ A3 | Looking north; levels above GF FFL

- ICF EPS (cut)

ICF concrete core / RC (cut)

Steel (cut)

Masonry wall (cut)
- Beyond the cut (line work)



SECTION A-A SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-98	168.650
GF FFL	0	168.748
top of ICF	+2783	171.531
top of ICF	+3202	171.950
FF TOC (hollowcore)	+3352	172.100
top of ICF	+3713	172.461
top of ICF	+4275	173.023
Top of FF ICF	+6227	174.975
top of roof build-up	+6676	175.424
Roof plateau TOS	+9492	178.240
top of roof build-up	+9842	178.590

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S33	305x305x198 UC S355	+2783	+3202
FF-S40	254x254x73 UC S355	+2948	+3202
FF-S41	254x254x73 UC S355	+2948	+3202
RF-S31	305x305x198 UC S355	+3453	+6481
RF-S32	305x305x198 UC S355	+3453	+6481
RF-S22a	254x254x73 UC S355	+8993	+9248
RF-S23a	254x254x73 UC S355	+8995	+9249
SF-S03	254x254x73 UC S355	+6227	+6481
SF-S04	152x152x37 UC S355	+6323	+6481
SF-S05	152x152x37 UC S355	+6323	+6481
SF-S06	305x305x158 UC S355	+6154	+6481
SF-S08	305x305x198 UC S355	+6087	+6481

SECTION KEY

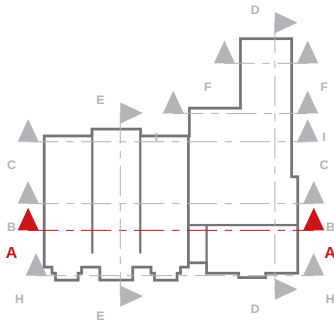

NOTES

- Section A-A is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
- Levels above GF FFL (168.748 AOD); the level table gives AOD.
- ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
- Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue




CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE
SECTION A-A
ICF section with levels and build-ups

SCALE	SIZE	DATE	DRAWN
1:125	A3	23.09.26	TS


STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-SE-01	P01

FOR APPROVAL - NOT FOR CONSTRUCTION

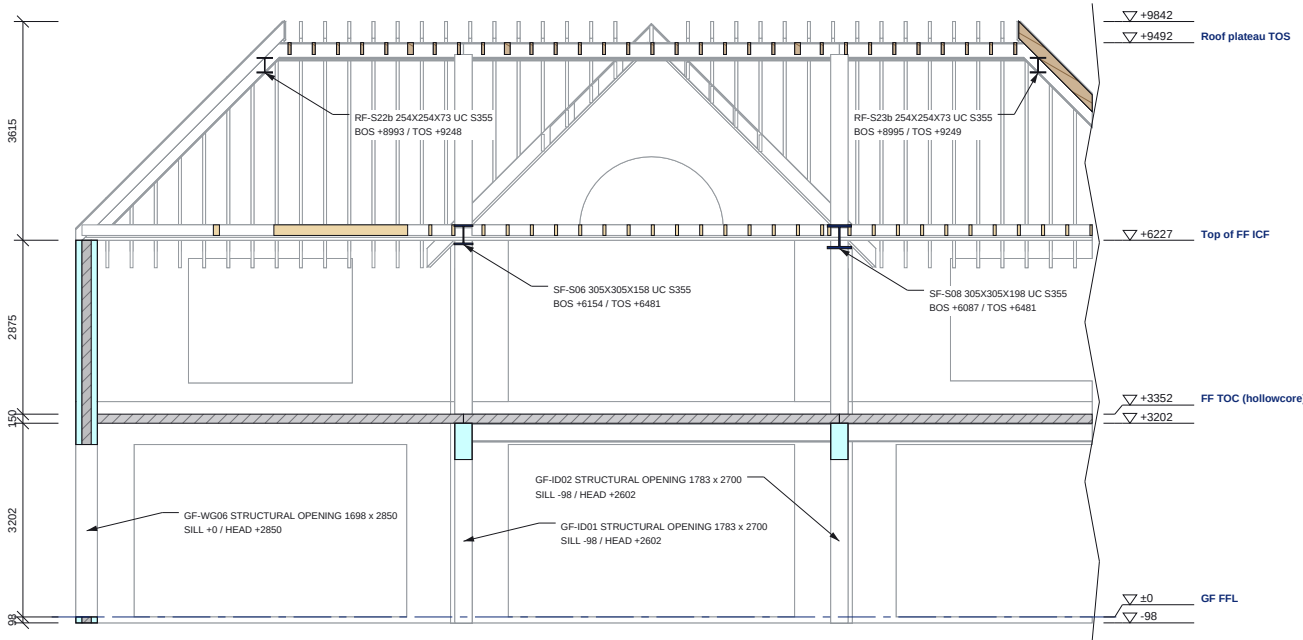

SECTION B-B (PART 1 OF 2)

Scale 1:125 @ A3 | Looking north; levels above GF FFL

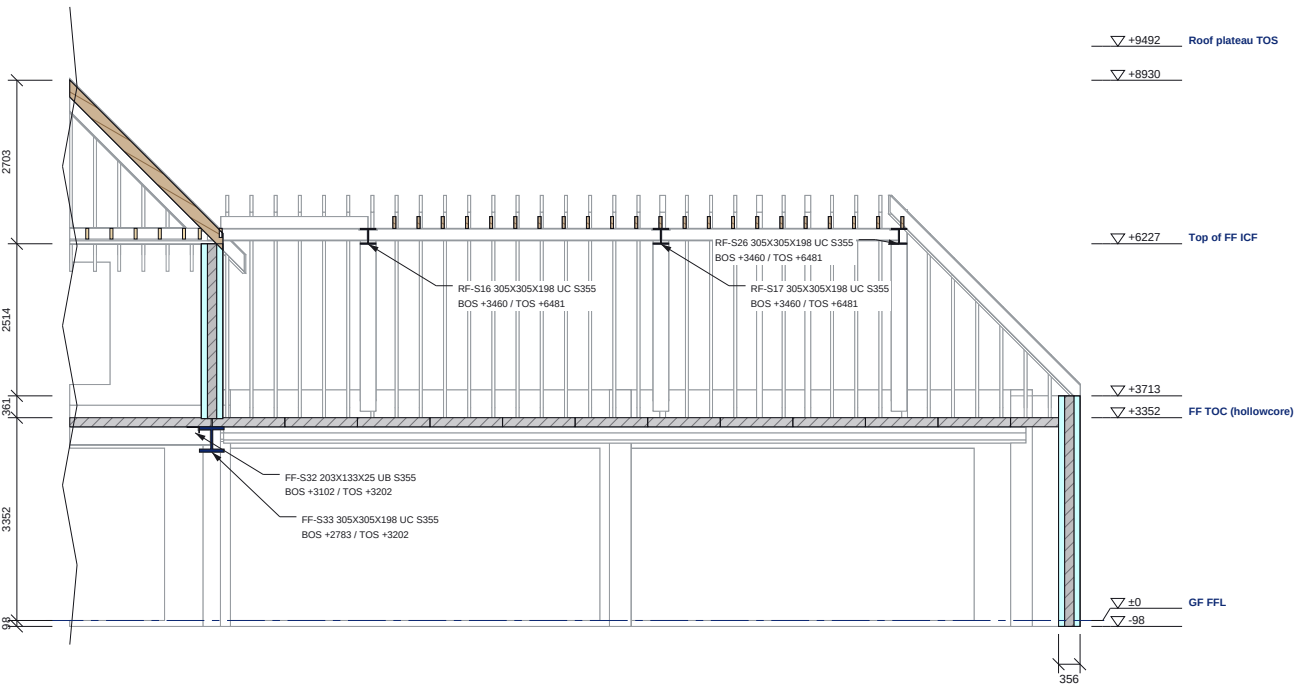

SECTION B-B (PART 2 OF 2)

Scale 1:125 @ A3 | Looking north; levels above GF FFL

- ICF EPS (cut)

ICF concrete core / RC (cut)

Steel (cut)

Masonry wall (cut)
- Beyond the cut (line work)



SECTION B-B SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-98	168.650
GF FFL	0	168.748
top of ICF	+3202	171.950
FF TOC (hollowcore)	+3352	172.100
top of ICF	+3713	172.461
Top of FF ICF	+6227	174.975
top of roof build-up	+8930	177.678
Roof plateau TOS	+9492	178.240
top of roof build-up	+9842	178.590

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S32	203x133x25 UB S355	+3102	+3202
FF-S33	305x305x198 UC S355	+2783	+3202
RF-S16	305x305x198 UC S355	+3460	+6481
RF-S17	305x305x198 UC S355	+3460	+6481
RF-S26	305x305x198 UC S355	+3460	+6481
RF-S22b	254x254x73 UC S355	+8993	+9248
RF-S23b	254x254x73 UC S355	+8995	+9249
SF-S06	305x305x158 UC S355	+6154	+6481
SF-S08	305x305x198 UC S355	+6087	+6481

SECTION KEY

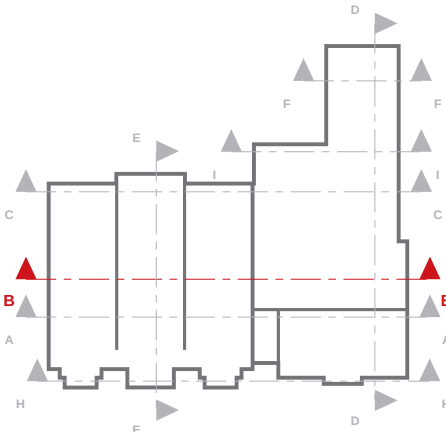

NOTES

- Section B-B is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
- Levels above GF FFL (168.748 AOD); the level table gives AOD.
- ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
- Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue




CLIENT ICF Homes	PROJECT Dendrons
---------------------	---------------------

DRAWING TITLE SECTION B-B ICF section with levels and build-ups
--

SCALE 1:125	SIZE A3	DATE 23.09.26	DRAWN TS
----------------	------------	------------------	-------------


STATUS FOR APPROVAL	DRAWING No. UKPCS-003-SE-02	REV P01
-------------------------------	---------------------------------------	-------------------

FOR APPROVAL - NOT FOR CONSTRUCTION

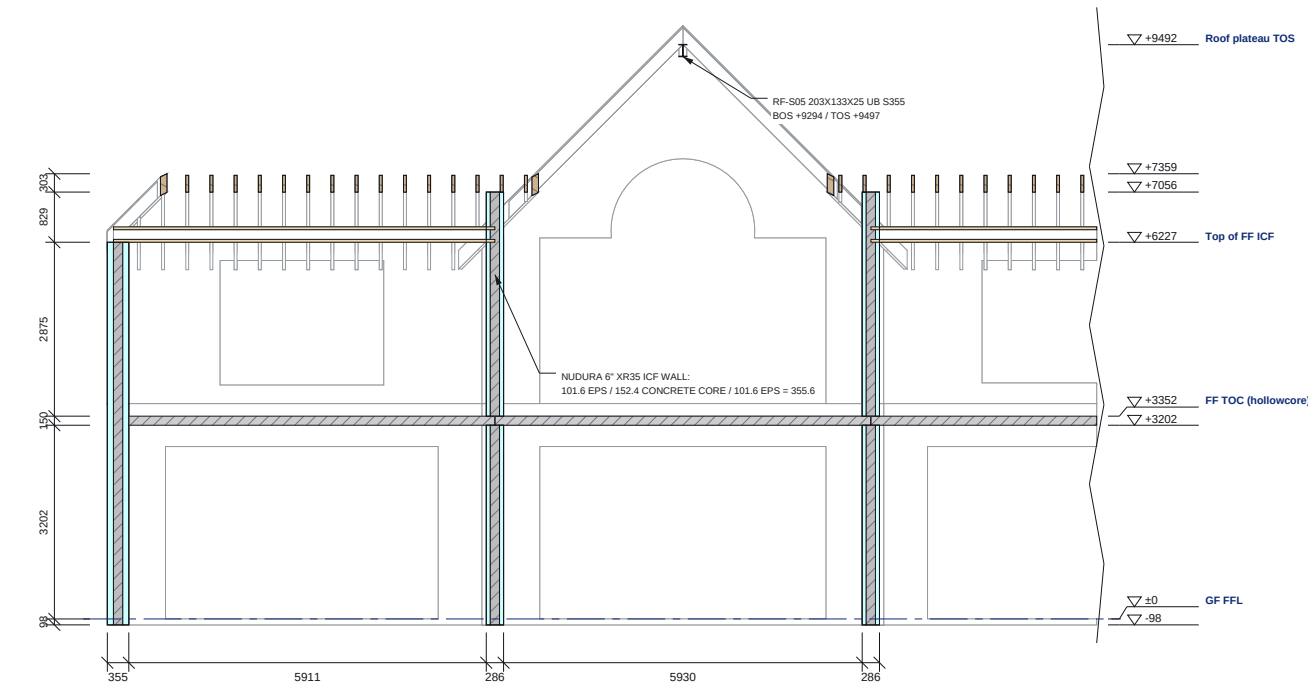

SECTION C-C (PART 1 OF 2)

Scale 1:125 @ A3 | Looking north; levels above GF FFL

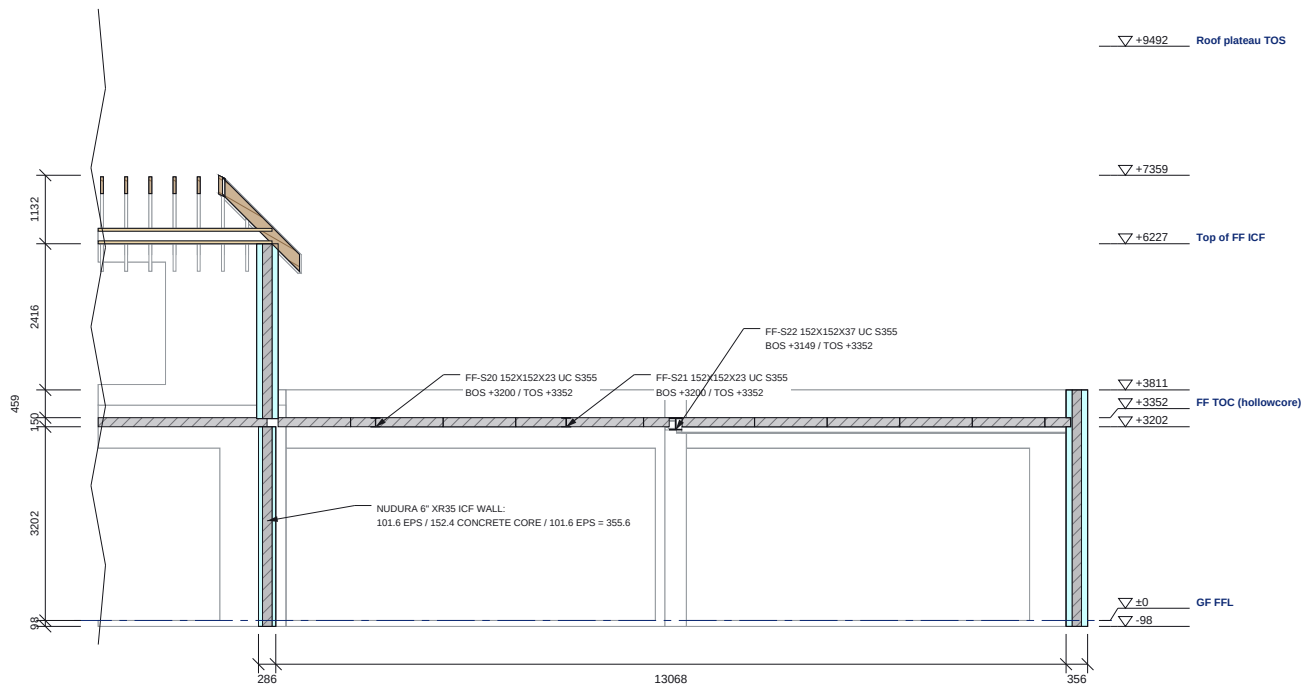

SECTION C-C (PART 2 OF 2)

Scale 1:125 @ A3 | Looking north; levels above GF FFL

- ICF EPS (cut)
- ICF concrete core / RC (cut)
- Steel (cut)
- Masonry wall (cut)
- Beyond the cut (line work)



SECTION C-C SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-98	168.650
GF FFL	0	168.748
top of ICF	+3202	171.950
FF TOC (hollowcore)	+3352	172.100
top of ICF	+3811	172.559
Top of FF ICF	+6227	174.975
top of ICF	+7056	175.804
top of roof build-up	+7359	176.107
Roof plateau TOS	+9492	178.240

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S20	152x152x23 UC S355	+3200	+3352
FF-S21	152x152x23 UC S355	+3200	+3352
FF-S22	152x152x37 UC S355	+3149	+3352
RF-S05	203x133x25 UB S355	+9294	+9497

SECTION KEY

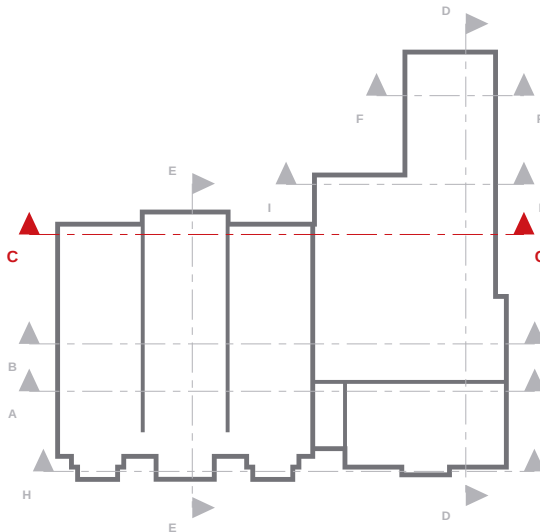

NOTES

- Section C-C is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
- Levels above GF FFL (168.748 AOD); the level table gives AOD.
- ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
- Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue



CLIENT

ICF Homes

PROJECT

Dendrons


DRAWING TITLE

SECTION C-C

ICF section with levels and build-ups


SCALE	SIZE	DATE	DRAWN
1:125	A3	23.09.26	TS

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-SE-03	P01

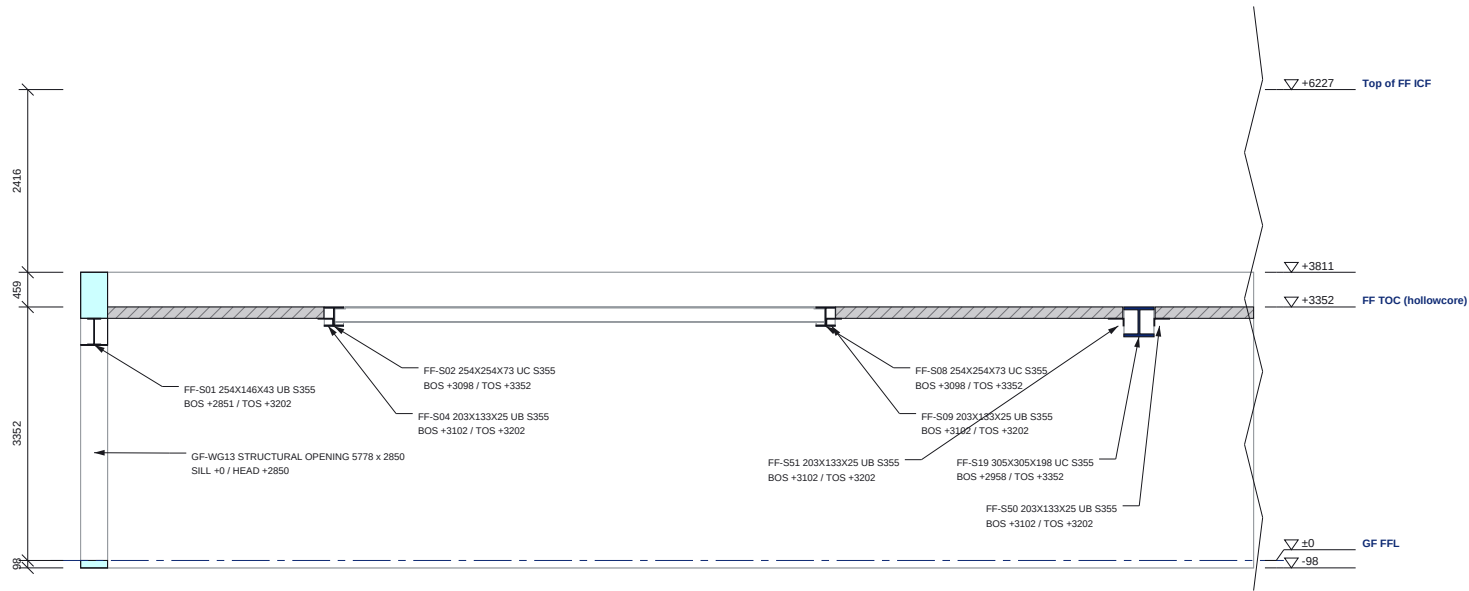

SECTION D-D (PART 1 OF 2)

Scale 1:100 @ A3 | Looking east; levels above GF FFL

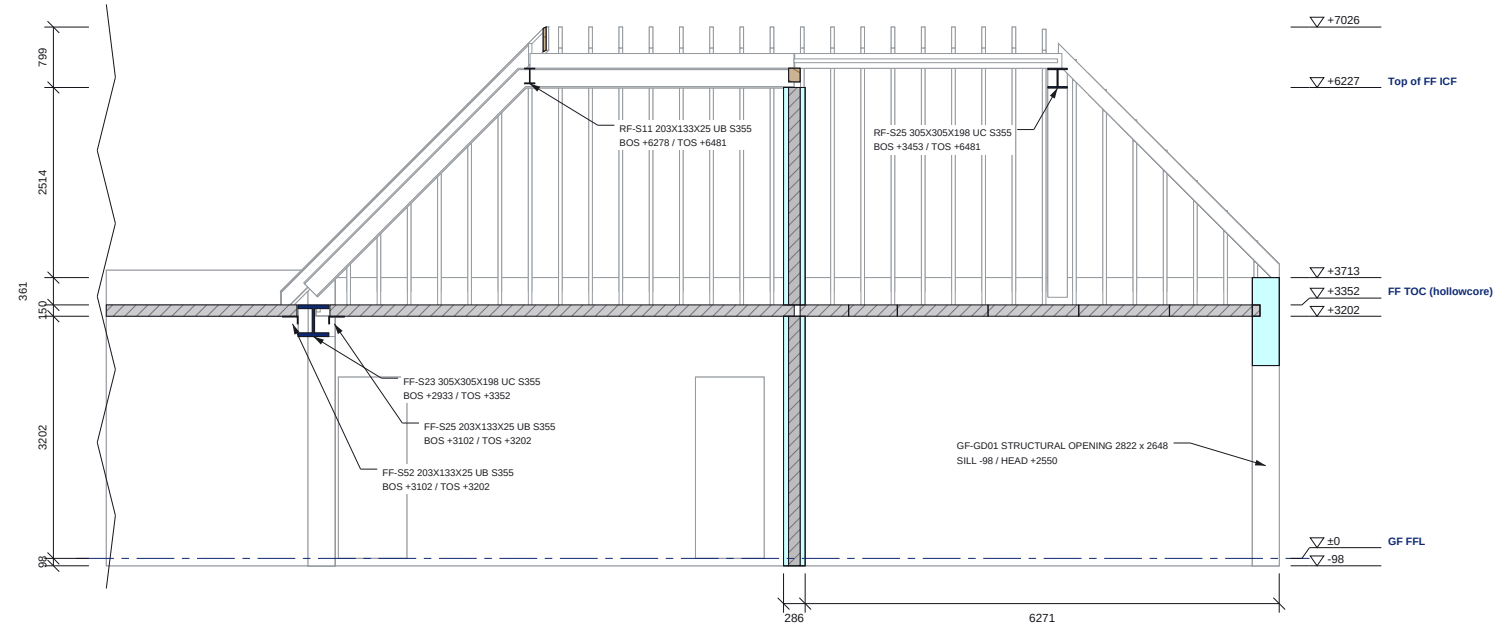

SECTION D-D (PART 2 OF 2)

Scale 1:100 @ A3 | Looking east; levels above GF FFL

- Legend:
- ICF EPS (cut)
 - ICF concrete core / RC (cut)
 - Steel (cut)
 - Masonry wall (cut)
 - Beyond the cut (line work)



SECTION D-D SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-98	168.650
GF FFL	0	168.748
top of ICF	+3202	171.950
FF TOC (hollowcore)	+3352	172.100
top of ICF	+3713	172.461
top of ICF	+3811	172.559
Top of FF ICF	+6227	174.975
top of roof build-up	+7026	175.774

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S01	254x146x43 UB S355	+2851	+3202
FF-S02	254x254x73 UC S355	+3098	+3352
FF-S04	203x133x25 UB S355	+3102	+3202
FF-S08	254x254x73 UC S355	+3098	+3352
FF-S09	203x133x25 UB S355	+3102	+3202
FF-S19	305x305x198 UC S355	+2958	+3352
FF-S23	305x305x198 UC S355	+2933	+3352
FF-S25	203x133x25 UB S355	+3102	+3202
FF-S52	203x133x25 UB S355	+3102	+3202
FF-S50	203x133x25 UB S355	+3102	+3202
FF-S51	203x133x25 UB S355	+3102	+3202
RF-S11	203x133x25 UB S355	+6278	+6481
RF-S25	305x305x198 UC S355	+3453	+6481

SECTION KEY

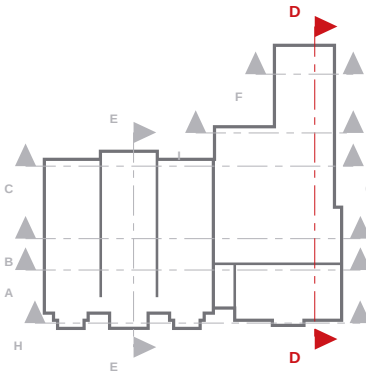

NOTES

- Section D-D is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
- Levels above GF FFL (168.748 AOD); the level table gives AOD.
- ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
- Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue



CLIENT

ICF Homes

PROJECT

Dendrons

DRAWING TITLE

SECTION D-D

ICF section with levels and build-ups

SCALE	SIZE	DATE	DRAWN
1:100	A3	23.09.26	TS
STATUS		DRAWING No.	
FOR APPROVAL		UKPCS-003-SE-04	REV
			P01

SECTION E-E SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-98	168.650
GF FFL	0	168.748
FF TOC (hollowcore)	+3352	172.100
top of ICF	+3560	172.308
top of ICF	+3900	172.648
Top of FF ICF	+6227	174.975
top of ICF	+8724	177.472
top of roof build-up	+9280	178.028
top of ICF	+9287	178.035
Roof plateau TOS	+9492	178.240

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S27	152x152x37 UC S355	+2999	+3202
FF-S34	152x152x37 UC S355	+2999	+3202
FF-S48	305x305x118 UC S355	+2894	+3202
RF-S01	254x146x43 UB S355	+6075	+9581
RF-S03	254x254x73 UC S355	+9194	+9454
RF-S07	254x254x73 UC S355	+9232	+9492
RF-S14	203x133x25 UB S355	+9289	+9492
RF-S20	203x133x25 UB S355	+9085	+9288
RF-S36b	254x146x43 UB S355	+6423	+8863
SF-S01	254x254x73 UC S355	+6214	+6481
SF-S02	254x254x73 UC S355	+6214	+6481

SECTION KEY

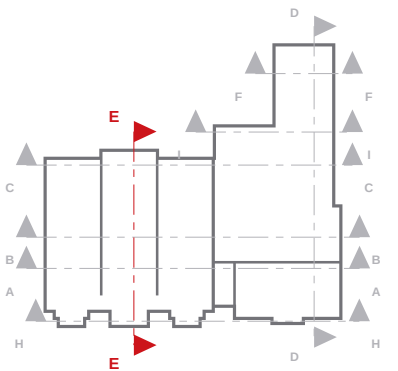

NOTES

- Section E-E is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
- Levels above GF FFL (168.748 AOD); the level table gives AOD.
- ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
- Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue




CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE
SECTION E-E
ICF section with levels and build-ups

SCALE	SIZE	DATE	DRAWN
1:100	A3	23.09.26	TS

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-SE-05	P01

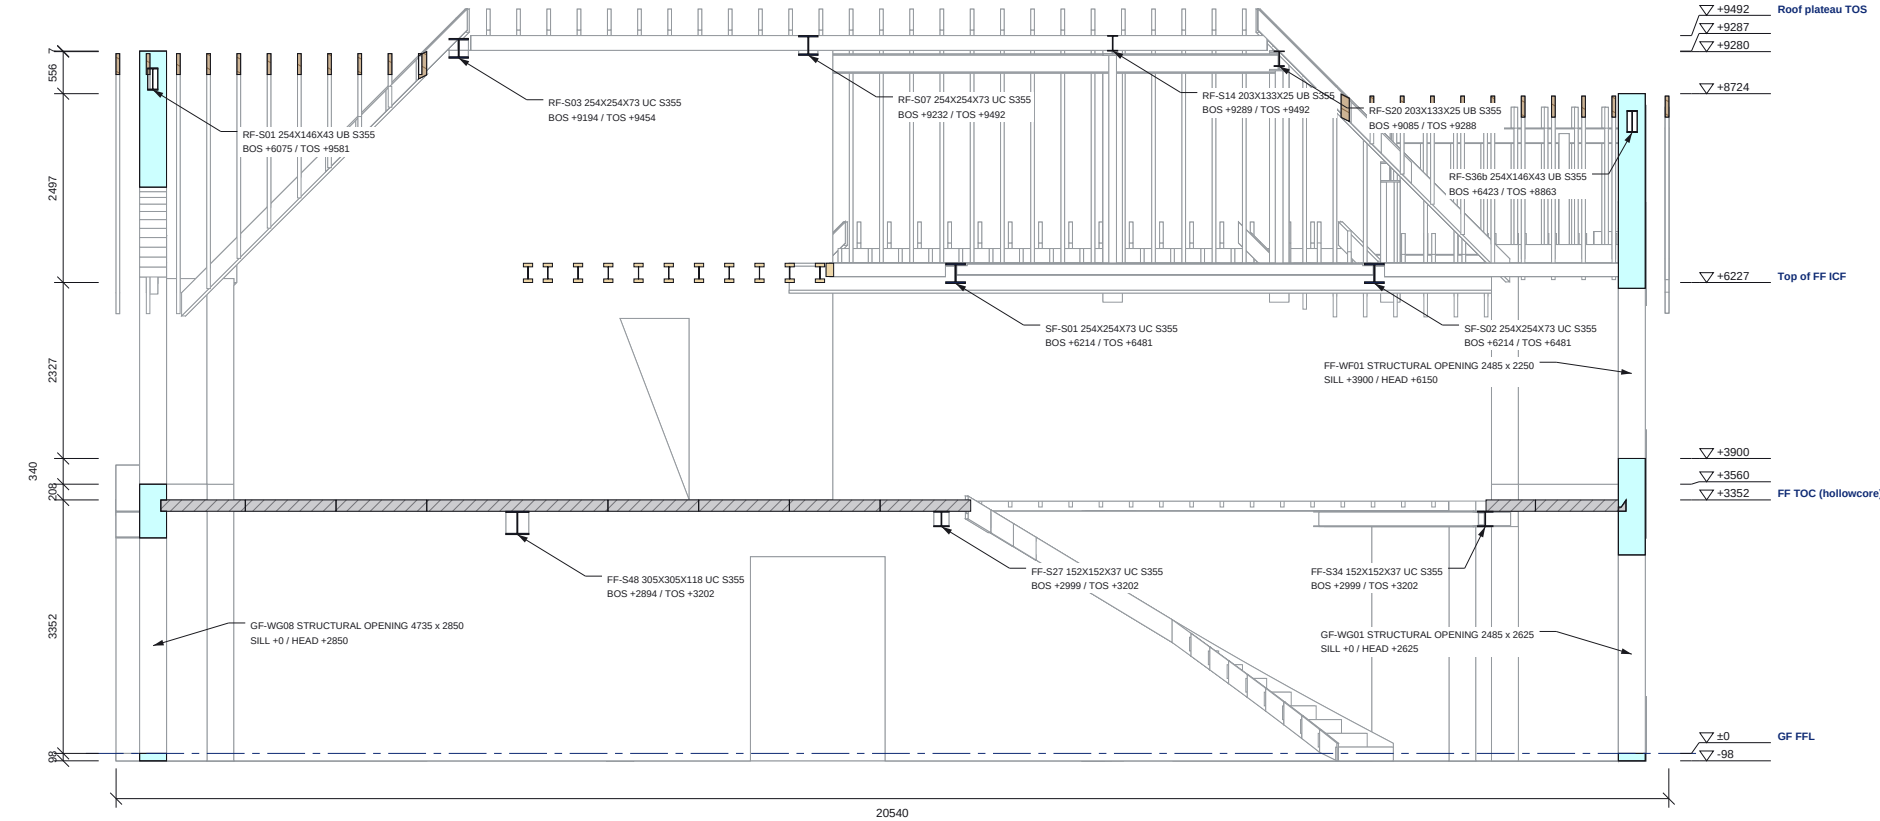

SECTION E-E

Scale 1:100 @ A3 | Looking east; levels above GF FFL

- ICF EPS (cut)
- ICF concrete core / RC (cut)
- Steel (cut)
- Masonry wall (cut)
- Beyond the cut (line work)



SECTION F-F SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-98	168.650
GF FFL	0	168.748
top of ICF	+3098	171.846
FF TOC (hollowcore)	+3352	172.100
top of ICF	+3811	172.559

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S02	254x254x73 UC S355	+3098	+3352
FF-S03	203x133x25 UB S355	+3102	+3202
FF-S05	203x133x25 UB S355	+3102	+3202
FF-S07	254x146x43 UB S355	+2851	+3311
FF-S12	152x152x37 UC S355	+3149	+3352
FF-S13	152x152x37 UC S355	+3149	+3352

SECTION KEY

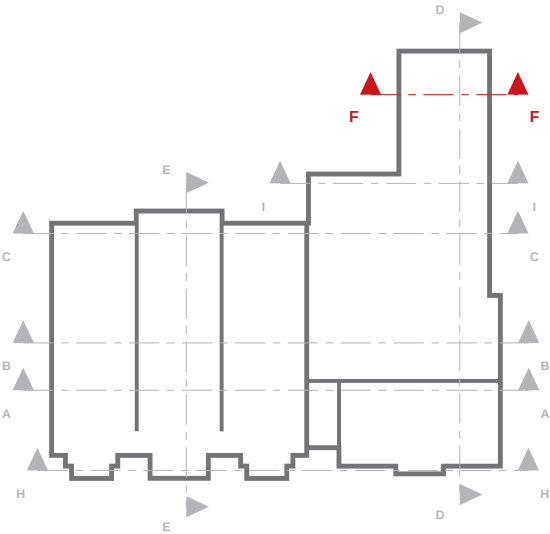

NOTES

- Section F-F is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
- Levels above GF FFL (168.748 AOD); the level table gives AOD.
- ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
- Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue



CLIENT

ICF Homes

PROJECT

Dendrons

DRAWING TITLE

SECTION F-F

ICF section with levels and build-ups

SCALE

1:50

SIZE

A3

DATE

23.09.26

DRAWN

TS

STATUS

FOR APPROVAL

DRAWING No.


UKPCS-003-SE-06

REV

P01


SECTION F-F

Scale 1:50 @ A3 | Looking north; levels above GF FFL

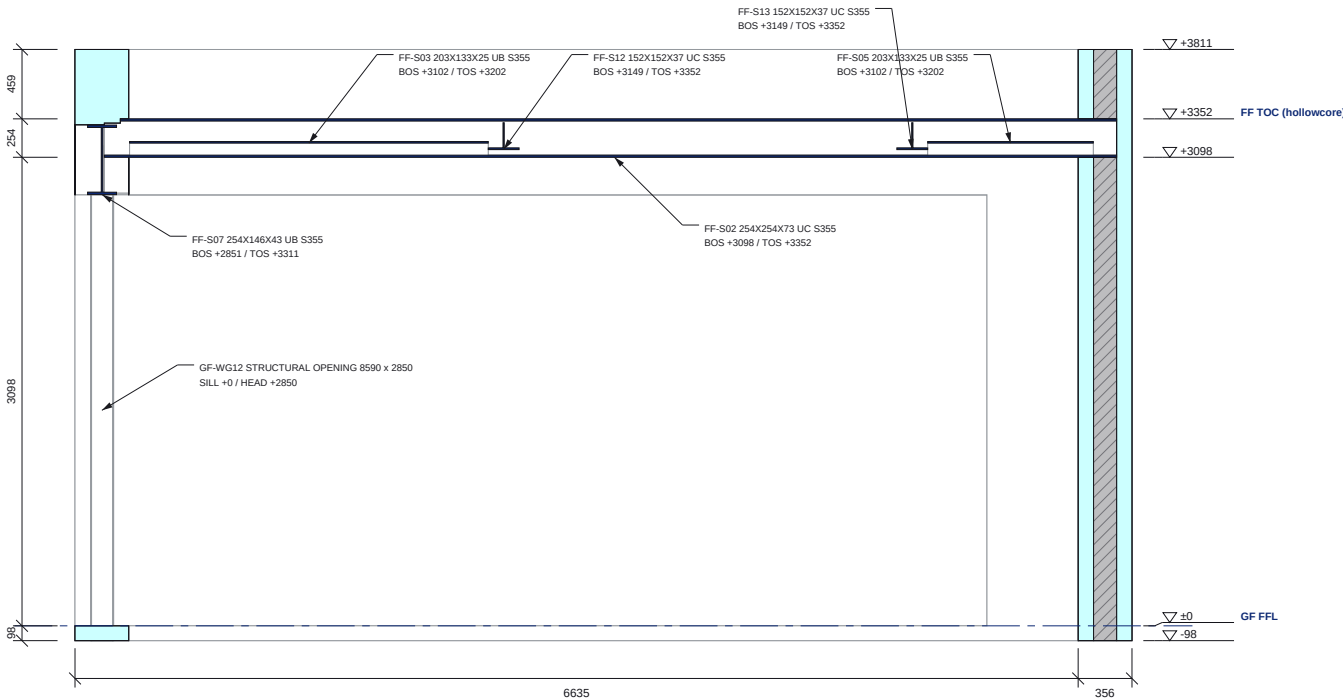


- ICF EPS (cut)
- ICF concrete core / RC (cut)
- Steel (cut)
- Masonry wall (cut)

Beyond the cut (line work)

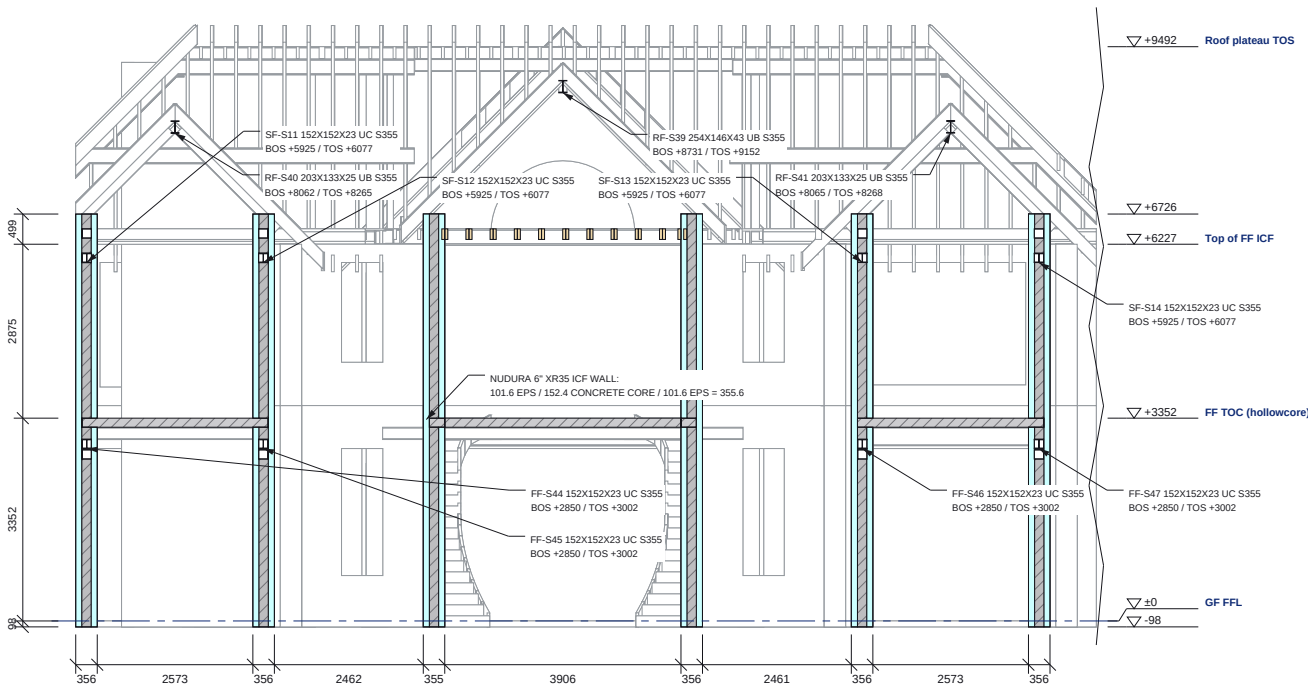

SECTION H-H (PART 1 OF 2)

Scale 1:125 @ A3 | Looking north; levels above GF FFL

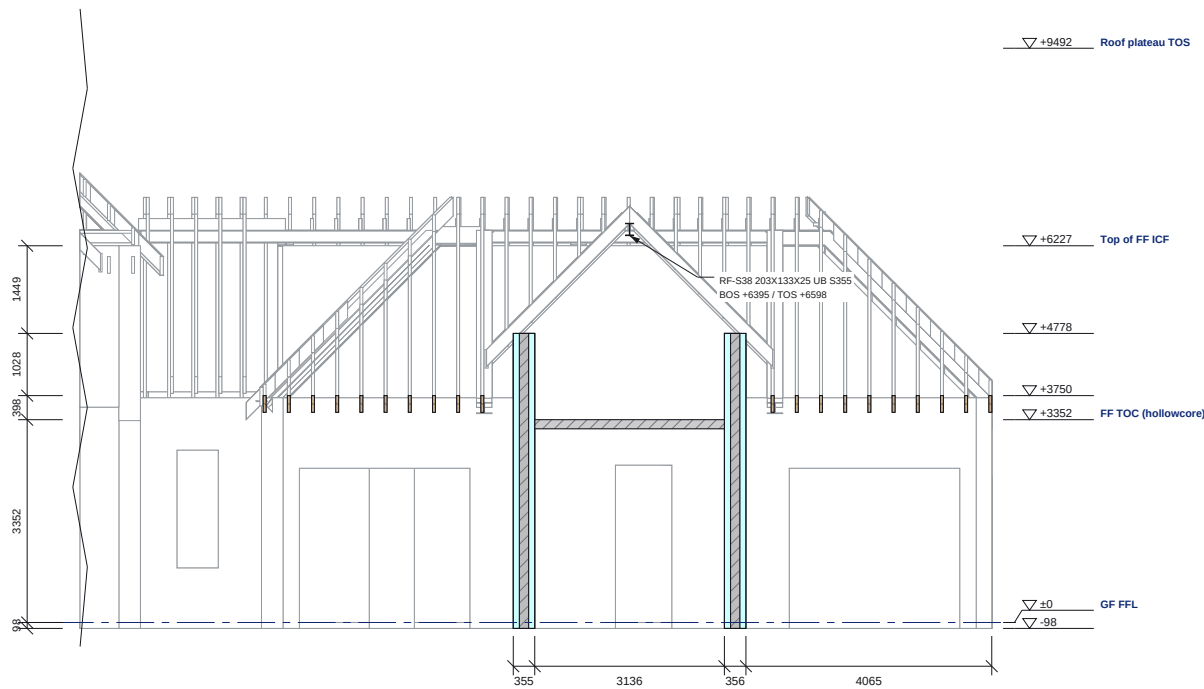

SECTION H-H (PART 2 OF 2)

Scale 1:125 @ A3 | Looking north; levels above GF FFL

- ICF EPS (cut)
- ICF concrete core / RC (cut)
- Steel (cut)
- Masonry wall (cut)
- Beyond the cut (line work)



SECTION H-H SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-98	168.650
GF FFL	0	168.748
FF TOC (hollowcore)	+3352	172.100
top of roof build-up	+3750	172.498
top of ICF	+4778	173.526
Top of FF ICF	+6227	174.975
top of ICF	+6726	175.474
Roof plateau TOS	+9492	178.240

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S44	152x152x23 UC S355	+2850	+3002
FF-S45	152x152x23 UC S355	+2850	+3002
FF-S46	152x152x23 UC S355	+2850	+3002
FF-S47	152x152x23 UC S355	+2850	+3002
RF-S38	203x133x25 UB S355	+6395	+6598
RF-S39	254x146x43 UB S355	+8731	+9152
RF-S40	203x133x25 UB S355	+8062	+8265
RF-S41	203x133x25 UB S355	+8065	+8268
SF-S11	152x152x23 UC S355	+5925	+6077
SF-S12	152x152x23 UC S355	+5925	+6077
SF-S13	152x152x23 UC S355	+5925	+6077
SF-S14	152x152x23 UC S355	+5925	+6077

SECTION KEY

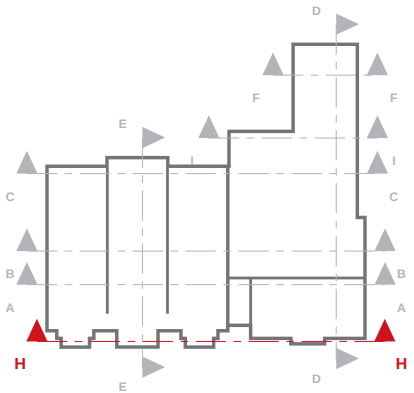

NOTES

- Section H-H is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
- Levels above GF FFL (168.748 AOD); the level table gives AOD.
- ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
- Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue




CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE
SECTION H-H
ICF section with levels and build-ups

SCALE	SIZE	DATE	DRAWN
1:125	A3	23.09.26	TS


STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-SE-07	P01

FOR APPROVAL - NOT FOR CONSTRUCTION

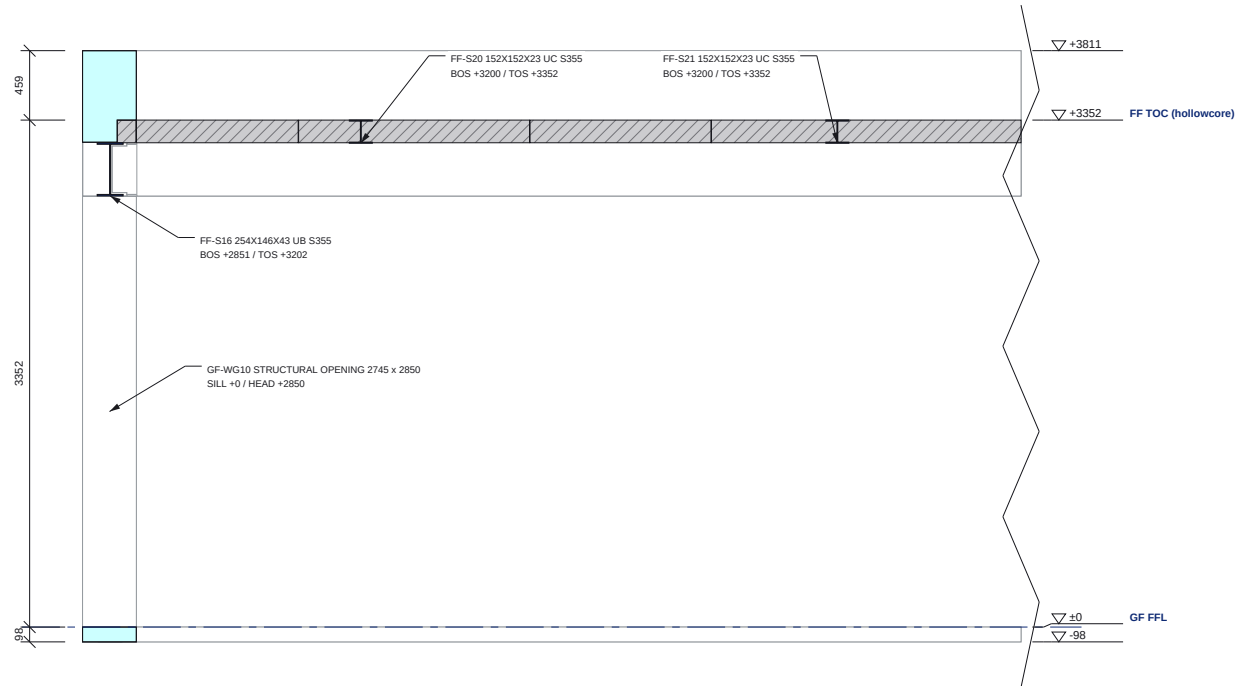

SECTION I-I (PART 1 OF 2)

Scale 1:50 @ A3 | Looking north; levels above GF FFL

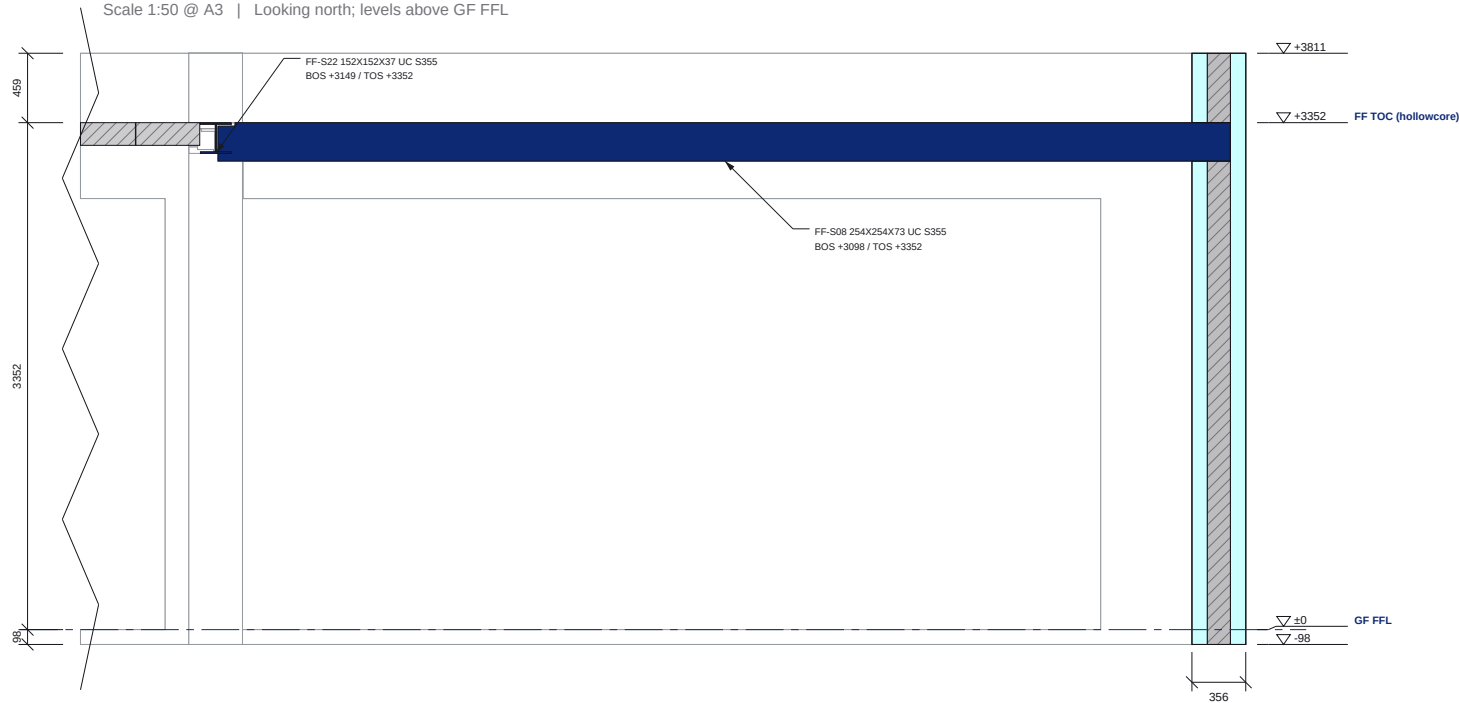

SECTION I-I (PART 2 OF 2)

Scale 1:50 @ A3 | Looking north; levels above GF FFL

- Do not scale. All dimensions in mm. Check all dimensions on site.
- ICF EPS (cut)
 - ICF concrete core / RC (cut)
 - Steel (cut)
 - Masonry wall (cut)
 - Beyond the cut (line work)



SECTION I-I SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-98	168.650
GF FFL	0	168.748
FF TOC (hollowcore)	+3352	172.100
top of ICF	+3811	172.559

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S08	254x254x73 UC S355	+3098	+3352
FF-S16	254x146x43 UB S355	+2851	+3202
FF-S20	152x152x23 UC S355	+3200	+3352
FF-S21	152x152x23 UC S355	+3200	+3352
FF-S22	152x152x37 UC S355	+3149	+3352

SECTION KEY

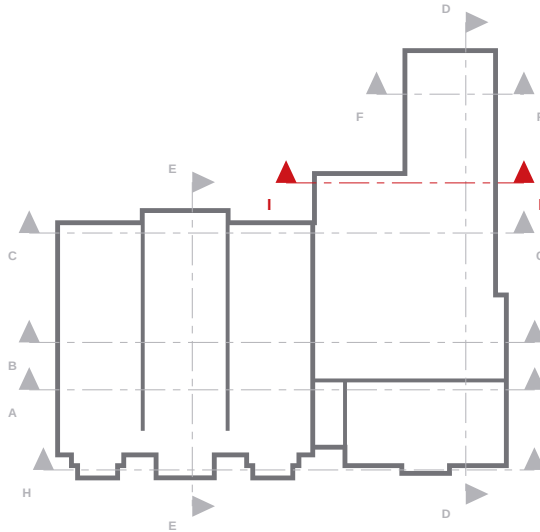

NOTES

- Section I-I is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
- Levels above GF FFL (168.748 AOD); the level table gives AOD.
- ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
- Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue



CLIENT

ICF Homes

PROJECT

Dendrons

DRAWING TITLE

SECTION I-I

ICF section with levels and build-ups

SCALE

1:50

SIZE

A3

DATE

23.09.26

DRAWN

TS

STATUS

FOR APPROVAL

DRAWING No.

UKPCS-003-SE-08

REV

P01

QUESTIONS REGISTER

QUERIES

Ref	Subject	Drawing	Status
EQ-01	SF-S06 / SF-S08 bearings over the FF windows FF-WF02 / FF-WF19 (S-102, S-121)	GS-02	Open
EQ-02	Stair void on S-101 vs the architect's main stair (Plan FF, Sections A-A / E-E)	GS-02	Open
EQ-03	RF-S13 lifting beam (UC 152x152x30) over the lift shaft - level and bearing	GS-02	Open
EQ-04	Roof steel levels (S-103 / S-200 / S-201) - for confirmation	GS-02	Open
EQ-05	RF-S40 / RF-S41 bay ridge beams land 244 mm above RF-S27 / RF-S28	GS-02	Open
EQ-06	Lintel depths vs the floor bearings (S-120 / S-121)	GA-01	Open
EQ-07	S-120 internal ICF walls flanking the hall (x 6.2 m / 12.4 m) - door positions	GA-01	Open

NOTES

1. Questions raised on the ICF approval drawings against the structural engineer's drawing Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -.
2. Each panel shows the engineer's drawing beside the architect's drawing and/or the ICF model, cropped to the same area.
3. Please answer in the response box of each question (or by email quoting the EQ reference); the approval drawings will be revised to suit.
4. EQ tags on the GA drawings link to these panels.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue



CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE

QUESTIONS FOR THE ENGINEER

Structural queries on the ICF approval drawings - sheet 1 of 4

SCALE	SIZE	DATE	DRAWN
NTS	A3	23.09.26	TS

FOR APPROVAL


UKPCS-003-EQ-01

P01

EQ-01 SF-S06 / SF-S08 bearings over the FF windows FF-WF02 / FF-WF19 (S-102, S-121)

Status: Open | see GS-02

ICF model (GS-02)

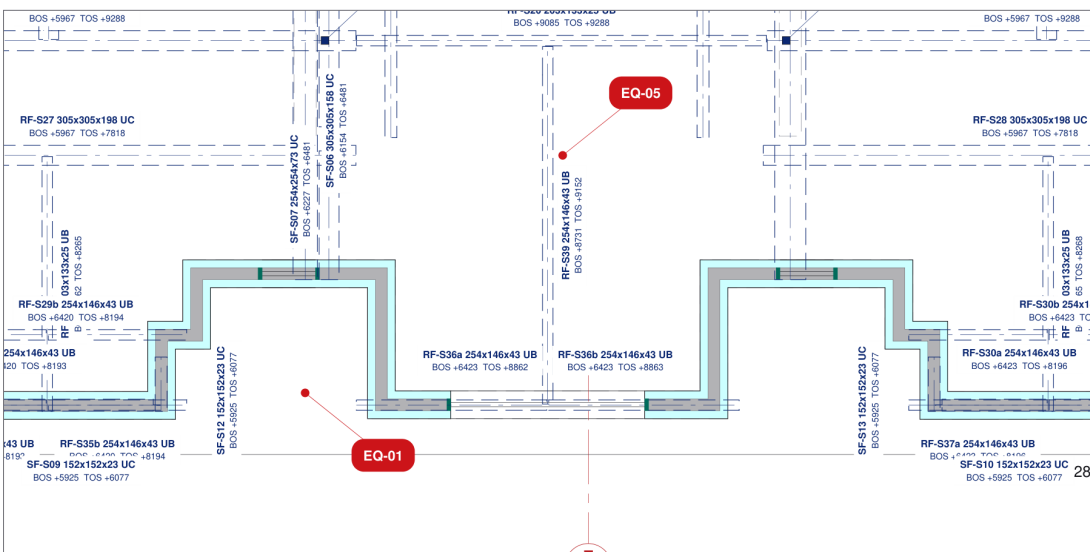

ISSUE

The second-floor transfer beams SF-S06 (UC 305x305x158, x 6370) and SF-S08 (UC 356x406x287, x 12586) bear on the south wall (L2, top 174.975 AOD) directly over the 685-wide FF windows either side of the entrance bay. At TOS 175.229 the beam undersides are 6252 (S06) and 6185 (S08) above the slab datum; the architect's window head is 6023, leaving 229 mm (S06) and 162 mm (S08) of wall between head and beam. S-121 schedules an RCB152 x 300 - 2H16 lintel there, which would reach 6323, 71 mm into SF-S06 and 138 mm into SF-S08.

QUESTION

Please confirm the bearing detail: a steel spreader under each beam end (model assumption UC 152x152x30, 1285 long, 300 bearing each side, TOS = beam underside), or a revised lintel / beam arrangement. The window positions are the architect's and are held.


ENGINEER'S RESPONSE

Name / date:

EQ-02 Stair void on S-101 vs the architect's main stair (Plan FF, Sections A-A / E-E)

Status: Open | see GS-02

ICF model (GS-02)

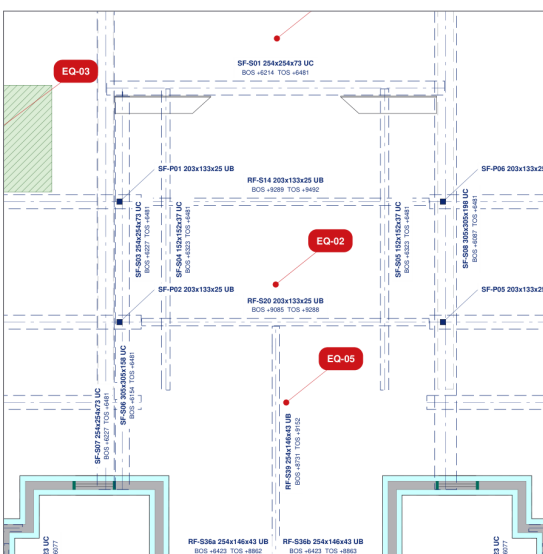

ISSUE

S-101 shows the stair void as the ellipse only (x 6.5..12.4 m, y 2.2..6.2 m) with a UC 203x203x46 trimmer on its north tangent (y ~6.23 m, TOS 171.950, "WALL BELOW") and hollowcore north of it. The architect's two curved flights (19 risers each) continue north beside a 3.3 m slot and land on the first floor at y ~8.9 m; that trimmer and the planks north of y 6.23 m would sit 1.1-1.5 m above the treads.

QUESTION


Please confirm the extent of the first-floor void (model: ellipse + flights + slot to y 8.93 m, planks HC-032/033/034 omitted, landing edge on the plank at y 8.89 m) and the trimmer arrangement around it.

ENGINEER'S RESPONSE

Name / date:

Status: Open | see GS-02

ICF model (GS-02)

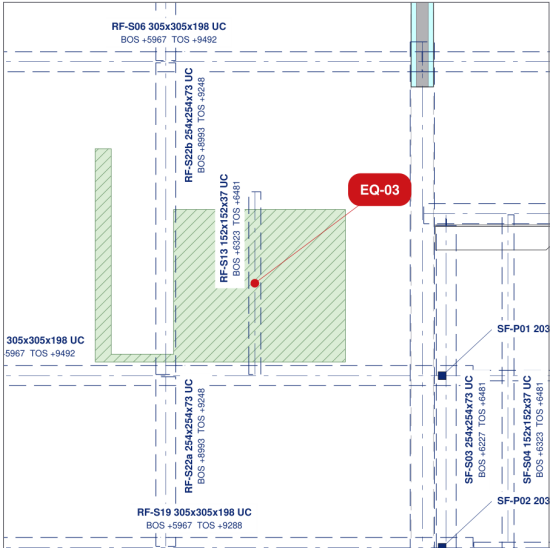

ISSUE

S-103 marks RF-S13 (UC 152x152x30; x 4225, y 7030..9373) as the LIFTING BEAM over the lift shaft; S-100 shows the shaft with UC 203x203x46 trimmers (2005 x 1925), S-101/S-102 the LIFT VOID and the STAIR VOID beside it, S-205 the blockwork shaft walls and the 200 pit recess. The model carries the blockwork shaft (walls x 3185..3385 / 5185..5385, y 7191..9145, 200 W/E, 100 N/S) and the secondary-stair enclosure west of it (x 2181..2385, y to y 9925) from the architect's plans, up to the underside of the roof plateau steel (178.240 TOS). RF-S13 is modelled at TOS 175.229 (the second-floor level) bearing on the shaft's N and S walls.

QUESTION

Please confirm the TOS of the lifting beam (175.229 as modelled, or at the roof plateau), its bearings on the blockwork shaft walls, the shaft wall thickness and the extent of the secondary stair (flight not modelled).

ENGINEER'S RESPONSE

Name / date:

EQ-04	Roof steel levels (S-103 / S-200 / S-201) - for confirmation	Status: Open see GS-02
-------	--	--------------------------

Status: Open | see GS-02

ICF model (GS-02)



ISSUE

The model takes the mansard rafter underside from the wall plates (L2 top 174.975 + 75) rising at 45 degrees, matching the architect's sections within 40 mm; the plateau at the architect's 9330.9590 box (TOS 178.240) with knee purlins RF-S22/23 on the engineer's lines x 3084/15871 at the rafter underside (TOS ~178.0) and the y 4812 frame line as a purlin-type member (TOS 178.036). The S-200 A-A section reads ~500 mm low against these (eaves TOS 5996, plateau 9006). Two collar pairs on the plateau (RF-S12/S14 and RF-S19/S20/S21) overlapped on the DWG and are modelled as UB203 middle pieces spliced to the UC254 cantilever ends over the posts.

QUESTION

Please confirm the intended TOS of the cranked frames and knee beams, and the splice arrangement of the collinear plateau pairs.

ENGINEER'S RESPONSE

Name / date:

QUESTIONS REGISTER

QUERIES

Ref	Subject	Drawing	Status
EQ-01	SF-S06 / SF-S08 bearings over the FF windows FF-WF02 / FF-WF19 (S-102, S-121)	GS-02	Open
EQ-02	Stair void on S-101 vs the architect's main stair (Plan FF, Sections A-A / E-E)	GS-02	Open
EQ-03	RF-S13 lifting beam (UC 152x152x30) over the lift shaft - level and bearing	GS-02	Open
EQ-04	Roof steel levels (S-103 / S-200 / S-201) - for confirmation	GS-02	Open
EQ-05	RF-S40 / RF-S41 bay ridge beams land 244 mm above RF-S27 / RF-S28	GS-02	Open
EQ-06	Lintel depths vs the floor bearings (S-120 / S-121)	GA-01	Open
EQ-07	S-120 internal ICF walls flanking the hall (x 6.2 m / 12.4 m) - door positions	GA-01	Open

NOTES

1. Questions raised on the ICF approval drawings against the structural engineer's drawing Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -.
2. Each panel shows the engineer's drawing beside the architect's drawing and/or the ICF model, cropped to the same area.
3. Please answer in the response box of each question (or by email quoting the EQ reference); the approval drawings will be revised to suit.
4. EQ tags on the GA drawings link to these panels.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue



CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE

QUESTIONS FOR THE ENGINEER

Structural queries on the ICF approval drawings - sheet 2 of 4


SCALE	SIZE	DATE	DRAWN
NTS	A3	23.09.26	TS

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-EQ-01	P01

EQ-05 RF-S40 / RF-S41 bay ridge beams land 244 mm above RF-S27 / RF-S28

Status: Open | see GS-02

ICF model (GS-02)

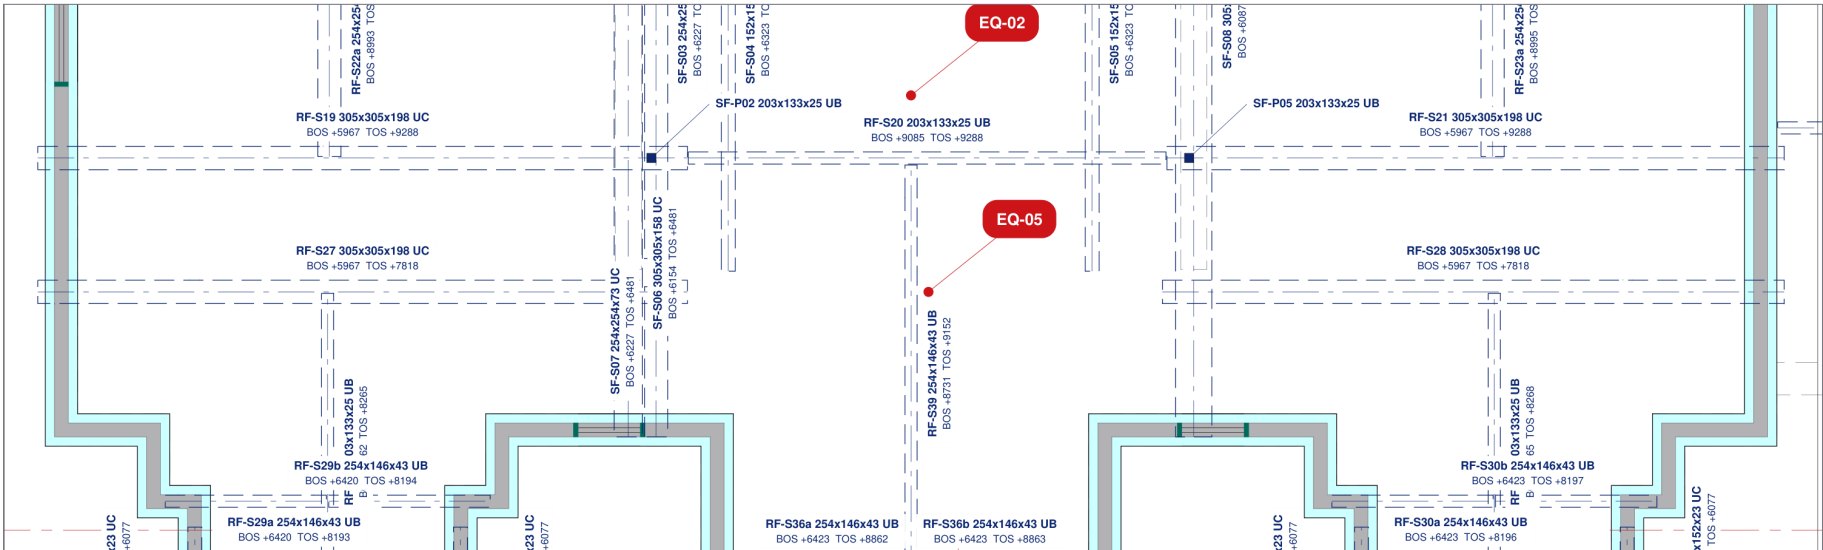

ISSUE RF-S40/RF-S41 (bay 1/3 ridge beams, TOS 177.013) land 244 mm above RF-S27/RF-S28 (TOS 176.566); modelled on 244-high stools.

QUESTION Please confirm the stool / seating detail.


ENGINEER'S RESPONSE

Name / date:

EQ-06 Lintel depths vs the floor bearings (S-120 / S-121)

Status: Open | see GA-01

ICF model (GA-01)

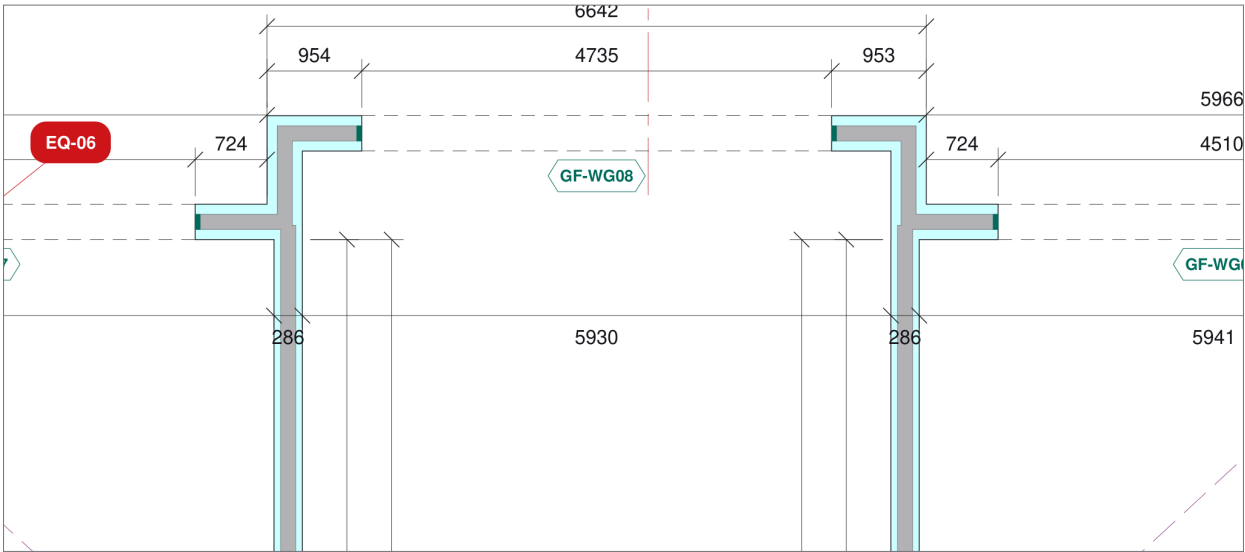

ISSUE GF north openings GF-WG07/08/09 (heads at 2948 = 171.598 AOD): the scheduled RCB152 x 375 - 2H20 reaches 3323, 23 mm above the hollowcore soffit 3300 (S-101 TOC 172.100, 150 planks). FF north windows FF-WF05/11 (heads 6023): the RCB152 x 350 - 2H20 reaches 6373, 48 mm above the FF wall top (174.975 AOD, the second-floor joist bearing). Both modelled as drawn. The pool-hall screens GF-WG10..13 carry the S-101 high-level beams FF-S16/S06/S07/S01 with no RC lintel.

QUESTION Please confirm the lintel / bearing arrangement at these openings.

ENGINEER'S RESPONSE

Name / date:

QUESTIONS REGISTER

QUERIES

Ref	Subject	Drawing	Status
EQ-01	SF-S06 / SF-S08 bearings over the FF windows FF-WF02 / FF-WF19 (S-102, S-121)	GS-02	Open
EQ-02	Stair void on S-101 vs the architect's main stair (Plan FF, Sections A-A / E-E)	GS-02	Open
EQ-03	RF-S13 lifting beam (UC 152x152x30) over the lift shaft - level and bearing	GS-02	Open
EQ-04	Roof steel levels (S-103 / S-200 / S-201) - for confirmation	GS-02	Open
EQ-05	RF-S40 / RF-S41 bay ridge beams land 244 mm above RF-S27 / RF-S28	GS-02	Open
EQ-06	Lintel depths vs the floor bearings (S-120 / S-121)	GA-01	Open
EQ-07	S-120 internal ICF walls flanking the hall (x 6.2 m / 12.4 m) - door positions	GA-01	Open

NOTES

- Questions raised on the ICF approval drawings against the structural engineer's drawing Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -.
- Each panel shows the engineer's drawing beside the architect's drawing and/or the ICF model, cropped to the same area.
- Please answer in the response box of each question (or by email quoting the EQ reference); the approval drawings will be revised to suit.
- EQ tags on the GA drawings link to these panels.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue



CLIENT
ICF Homes

PROJECT
Dendrons

DRAWING TITLE

QUESTIONS FOR THE ENGINEER

Structural queries on the ICF approval drawings - sheet 3 of 4


SCALE	SIZE	DATE	DRAWN
NTS	A3	23.09.26	TS

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-EQ-01	P01

EQ-07	S-120 internal ICF walls flanking the hall (x 6.2 m / 12.4 m) - door positions	Status: Open see GA-01
-------	--	--------------------------

Status: Open | see GA-01

ICF model (GA-01)

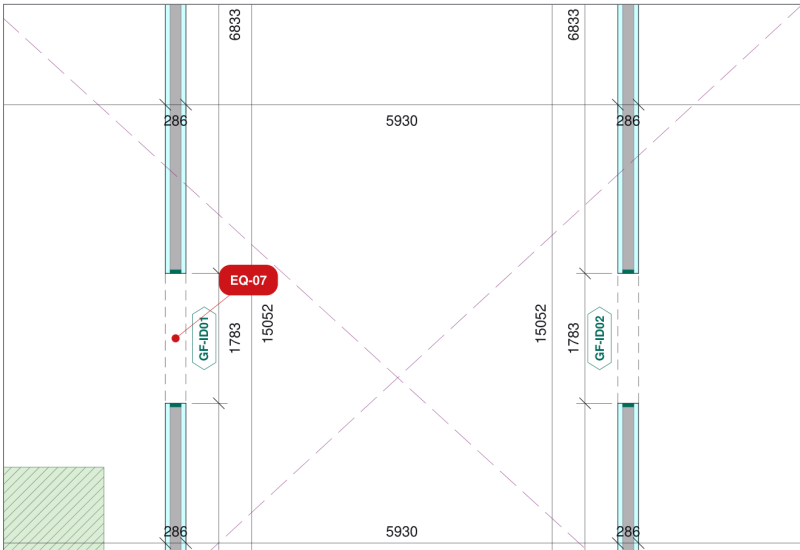

ISSUE

S-120 shows ICF 286 mm walls either side of the hall with lintels at y 10.0-11.8 m and (S-121) 12.7-13.6 m; the model has these walls (Walls 43/44) with double doors GF-ID01/02 (1783 wide) and FF doors FF-ID01/02 (915) from the architect's swings. S-120 also shows lintels on the annex cross wall (Wall 46) at x 21.6-22.8, 23.5-24.5 and 26.9-27.8 m and on Wall 47 at y 5.05-6.87 m; the architect's plan shows the Wall 46 doors at 23.5-24.5 and 26.85-27.8 m and single doors at the north ends of Walls 45/47. Modelled to the architect (GF-ID03..07).

QUESTION

Please confirm the door positions on the internal ICF walls.

ENGINEER'S RESPONSE

Name / date:

QUESTIONS REGISTER

QUERIES

Ref	Subject	Drawing	Status
EQ-01	SF-S06 / SF-S08 bearings over the FF windows FF-WF02 / FF-WF19 (S-102, S-121)	GS-02	Open
EQ-02	Stair void on S-101 vs the architect's main stair (Plan FF, Sections A-A / E-E)	GS-02	Open
EQ-03	RF-S13 lifting beam (UC 152x152x30) over the lift shaft - level and bearing	GS-02	Open
EQ-04	Roof steel levels (S-103 / S-200 / S-201) - for confirmation	GS-02	Open
EQ-05	RF-S40 / RF-S41 bay ridge beams land 244 mm above RF-S27 / RF-S28	GS-02	Open
EQ-06	Lintel depths vs the floor bearings (S-120 / S-121)	GA-01	Open
EQ-07	S-120 internal ICF walls flanking the hall (x 6.2 m / 12.4 m) - door positions	GA-01	Open

NOTES

1. Questions raised on the ICF approval drawings against the structural engineer's drawing Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -.
2. Each panel shows the engineer's drawing beside the architect's drawing and/or the ICF model, cropped to the same area.
3. Please answer in the response box of each question (or by email quoting the EQ reference); the approval drawings will be revised to suit.
4. EQ tags on the GA drawings link to these panels.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue



CLIENT

ICF Homes

PROJECT

Dendrons

DRAWING TITLE

QUESTIONS FOR THE ENGINEER

Structural queries on the ICF approval drawings - sheet 4 of 4

SCALE	SIZE	DATE	DRAWN
NTS	A3	23.09.26	TS

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-EQ-01	P01