
FOR APPROVAL - NOT FOR CONSTRUCTION

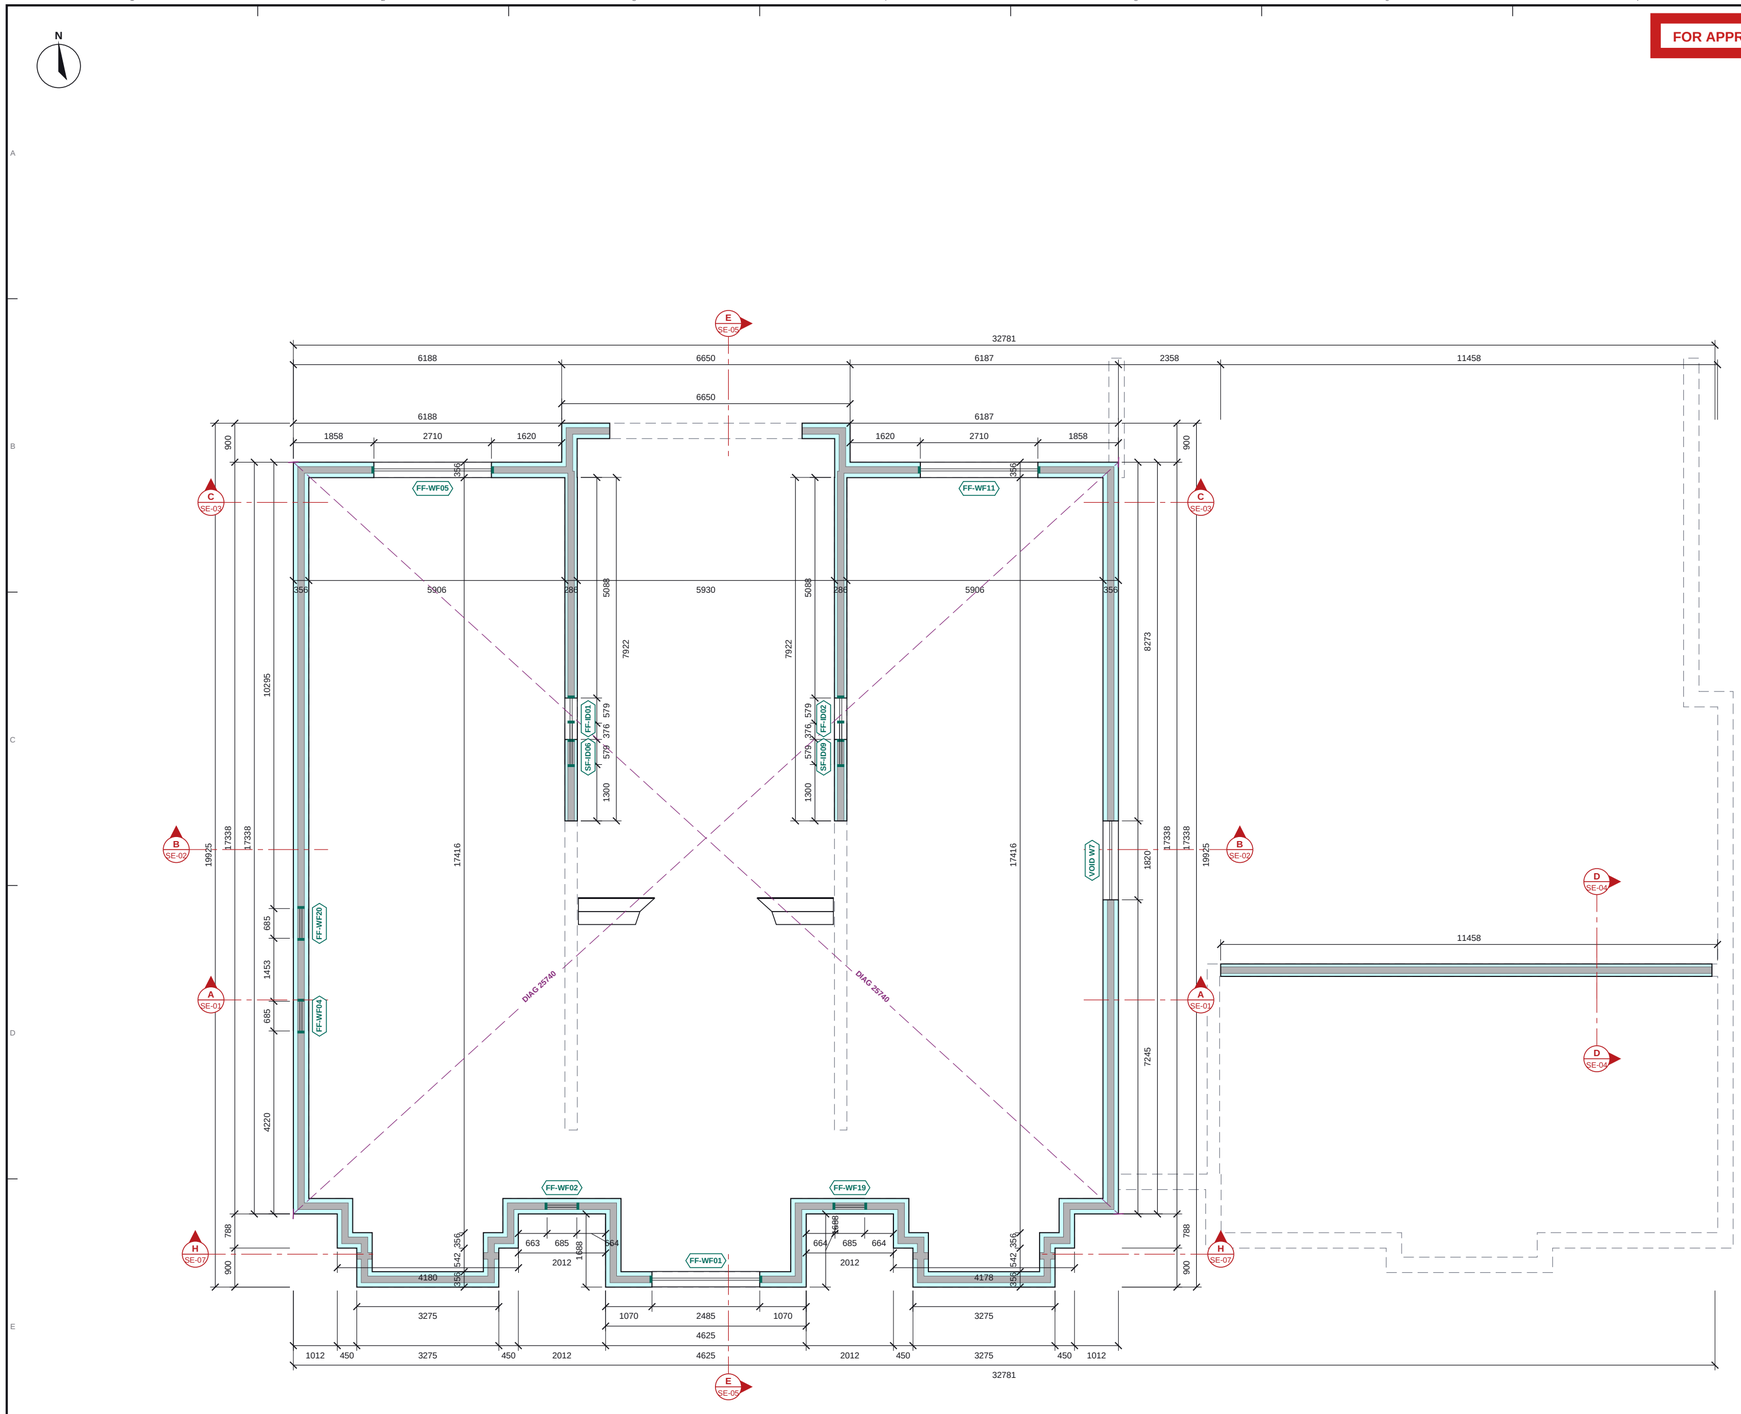


EPS insulation (Nudura form)
Concrete core
End cap at opening
ICF walls of the level below (dashed)
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

## FF ICF PLAN

Scale 1:100 @ A2 | Plan cut at +4100

0 1 2 3 4 5m

## FF ICF SCHEDULES

### OPENING SCHEDULE

| Ref | Width | Height | Sill | Head | Lintel |
|---|---|---|---|---|---|
| FF-ID01 | 955 | 2475 | +3350 | +5825 | - |
| FF-ID02 | 955 | 2475 | +3350 | +5825 | - |
| FF-WF01 | 2485 | 2250 | +3875 | +6125 | - |
| FF-WF02 | 685 | 1275 | +4250 | +5525 | - |
| FF-WF04 | 685 | 1350 | +4250 | +5600 | - |
| FF-WF05 | 2710 | 1725 | +3875 | +5600 | - |
| FF-WF11 | 2710 | 1725 | +3875 | +5600 | - |
| FF-WF19 | 685 | 1275 | +4250 | +5525 | - |
| FF-WF20 | 685 | 1350 | +4250 | +5600 | - |
| SF-ID06 | 955 | 2400 | +6500 | +8900 | - |
| SF-ID09 | 955 | 2400 | +6500 | +8900 | - |
| VOID W7 | 1820 | 3000 | +3425 | +6425 | - |

Structural openings in the ICF; sill and head above GF FFL. VOID = subtract cut in the ICF (no end caps / lintel buck modelled).

### NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL (168.748 AOD). Sill / head = structural opening in the ICF.
3. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
4. Lintel (L-n) and steel (B-n, C-1) marks from Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -, which takes precedence.
5. Masonry walls shown for context.
6. Steel over the ICF: see UKPCS-003-GS-02.

### REVISIONS

| REV | DATE | DESCRIPTION |
|---|---|---|
| P01 | 23.09.26 | Approval issue |
| P02 | 15.10.26 | Revised to the P01 comments |

Nudura™ BuildEase

| CLIENT | PROJECT |
|---|---|
| ICF Homes | Dendrons |

DRAWING TITLE
**FF ICF GENERAL ARRANGEMENT**
ICF walls, openings and setting out

| SCALE | SIZE | DATE |
|---|---|---|
| 1:100 | A2 | 15.10.26 |
| DRAWN | CHECKED | APPROVED |
| TS | | |

| STATUS | DRAWING No. | REV |
|---|---|---|
| FOR APPROVAL | UKPCS-003-GA-02 | P02 |

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.