
FOR APPROVAL - NOT FOR CONSTRUCTION

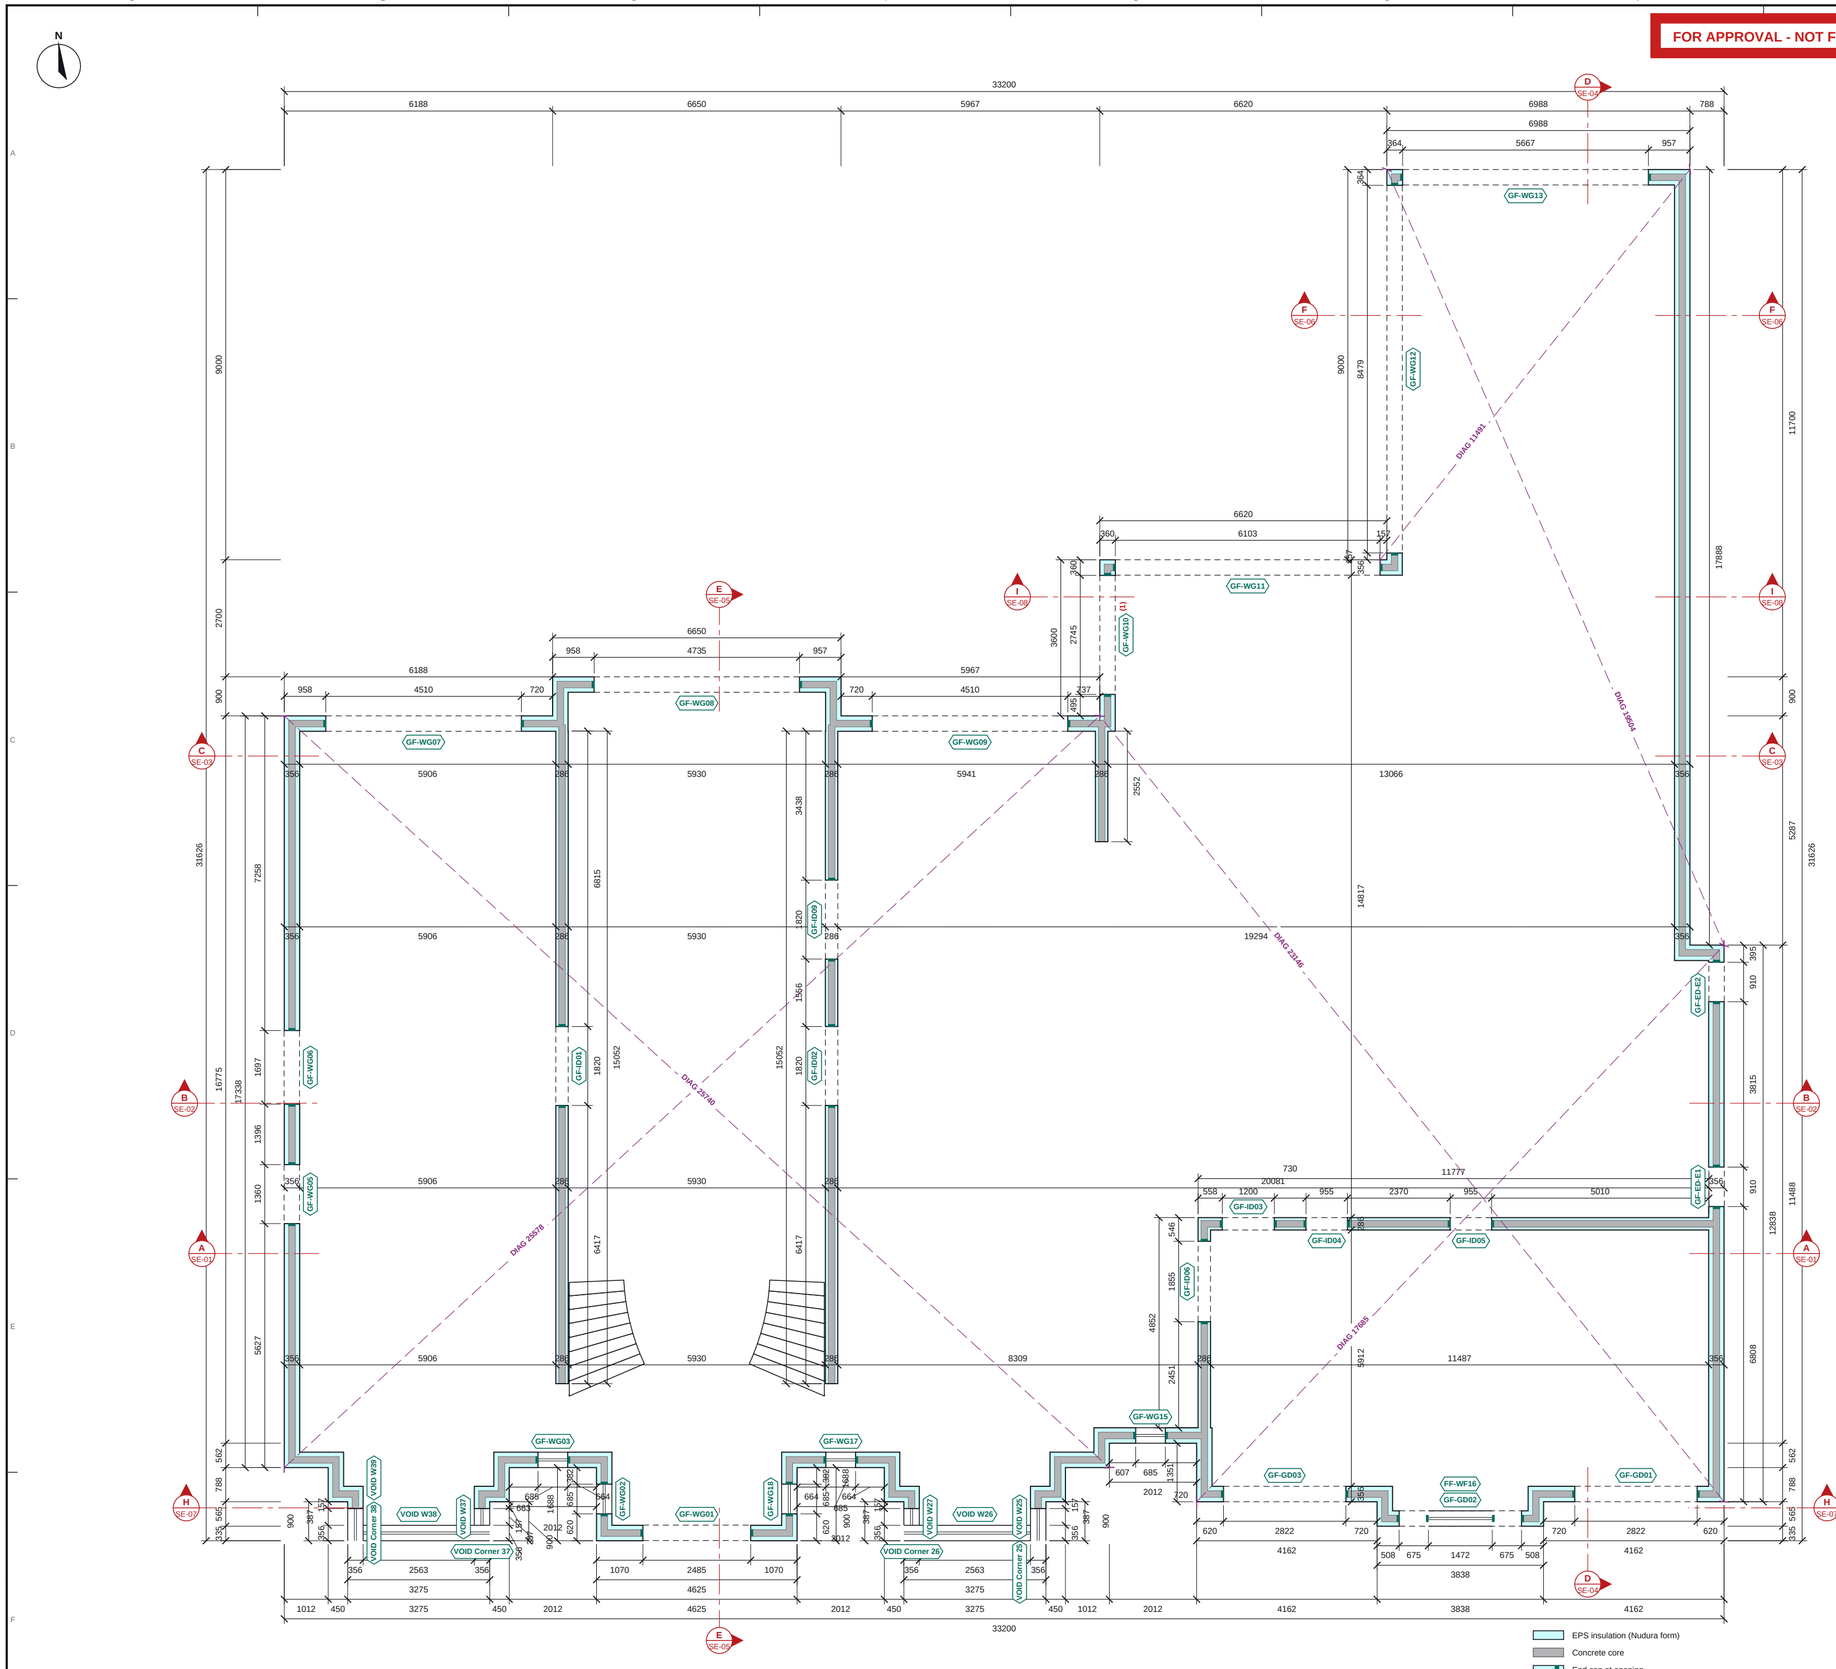

EPS insulation (Nudura form)
Concrete core
End cap at opening
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

GF ICF PLAN

Scale 1:100 @ A2 | Plan cut at +1380

0 1 2 3 4 5m

GF ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
FF-WF16	1472	2100	+3425	+5525	-
GF-ED-E1	910	2475	-100	+2375	-
GF-ED-E2	910	2475	-100	+2375	-
GF-GD01	2822	2775	-100	+2675	-
GF-GD02	2822	2775	-100	+2675	-
GF-GD03	2822	2775	-100	+2675	-
GF-ID01	1820	2800	-100	+2700	-
GF-ID02	1820	2800	-100	+2700	-
GF-ID03	1200	2800	-100	+2700	-
GF-ID04	955	2800	-100	+2700	-
GF-ID05	955	2800	-100	+2700	-
GF-ID06	1855	2800	-100	+2700	-
GF-ID09	1820	2800	-100	+2700	-
GF-WG01	2485	3000	-100	+2900	-
GF-WG02	685	2100	+725	+2825	-
GF-WG03	685	2100	+725	+2825	-
GF-WG05	1360	2925	-100	+2825	-
GF-WG06	1697	2925	-100	+2825	-
GF-WG07	4510	2925	-100	+2825	-
GF-WG08	4735	2925	-100	+2825	-
GF-WG09	4510	2925	-100	+2825	-
GF-WG10 (1)	2745	2925	-100	+2825	-
GF-WG11	6103	2925	-100	+2825	-
GF-WG12	8479	2925	-100	+2825	-
GF-WG13	5667	2925	-100	+2825	-
GF-WG15	685	1800	+1025	+2825	-
GF-WG17	685	2100	+725	+2825	-
GF-WG18	685	2100	+725	+2825	-
VOID Corner 25	356	2100	+725	+2825	-
VOID Corner 26	356	2100	+725	+2825	-
VOID Corner 37	356	2100	+725	+2825	-
VOID Corner 38	356	2100	+725	+2825	-
VOID W25	387	2100	+725	+2825	-
VOID W26	2563	2100	+725	+2825	-
VOID W27	387	2100	+725	+2825	-
VOID W37	387	2100	+725	+2825	-
VOID W38	2563	2100	+725	+2825	-
VOID W39	387	2100	+725	+2825	-

Structural openings in the ICF; sill and head above GF FFL. (1) GF-WG10: frame head 2825; ICF starts on the steel, outer ICF skin carried down over the steel and slab edge to the frame head (also WG11-13 and the GF bay voids) VOID = subtract cut in the ICF (no end caps / lintel buck modelled).

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL (168.748 AOD). Sill / head = structural opening in the ICF.
3. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
4. Lintel (L-n) and steel (B-n, C-1) marks from Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -, which takes precedence.
5. Masonry walls shown for context.
6. Steel over the ICF: see UKPCS-003-GS-01.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments
P03	19.10.26	Revised to the P02 comments

Nudura™ BuildEase

CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE
GF ICF GENERAL ARRANGEMENT
ICF walls, openings and setting out

SCALE	SIZE	DATE
1:100	A2	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-GA-01	P03

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.