
FOR APPROVAL - NOT FOR CONSTRUCTION

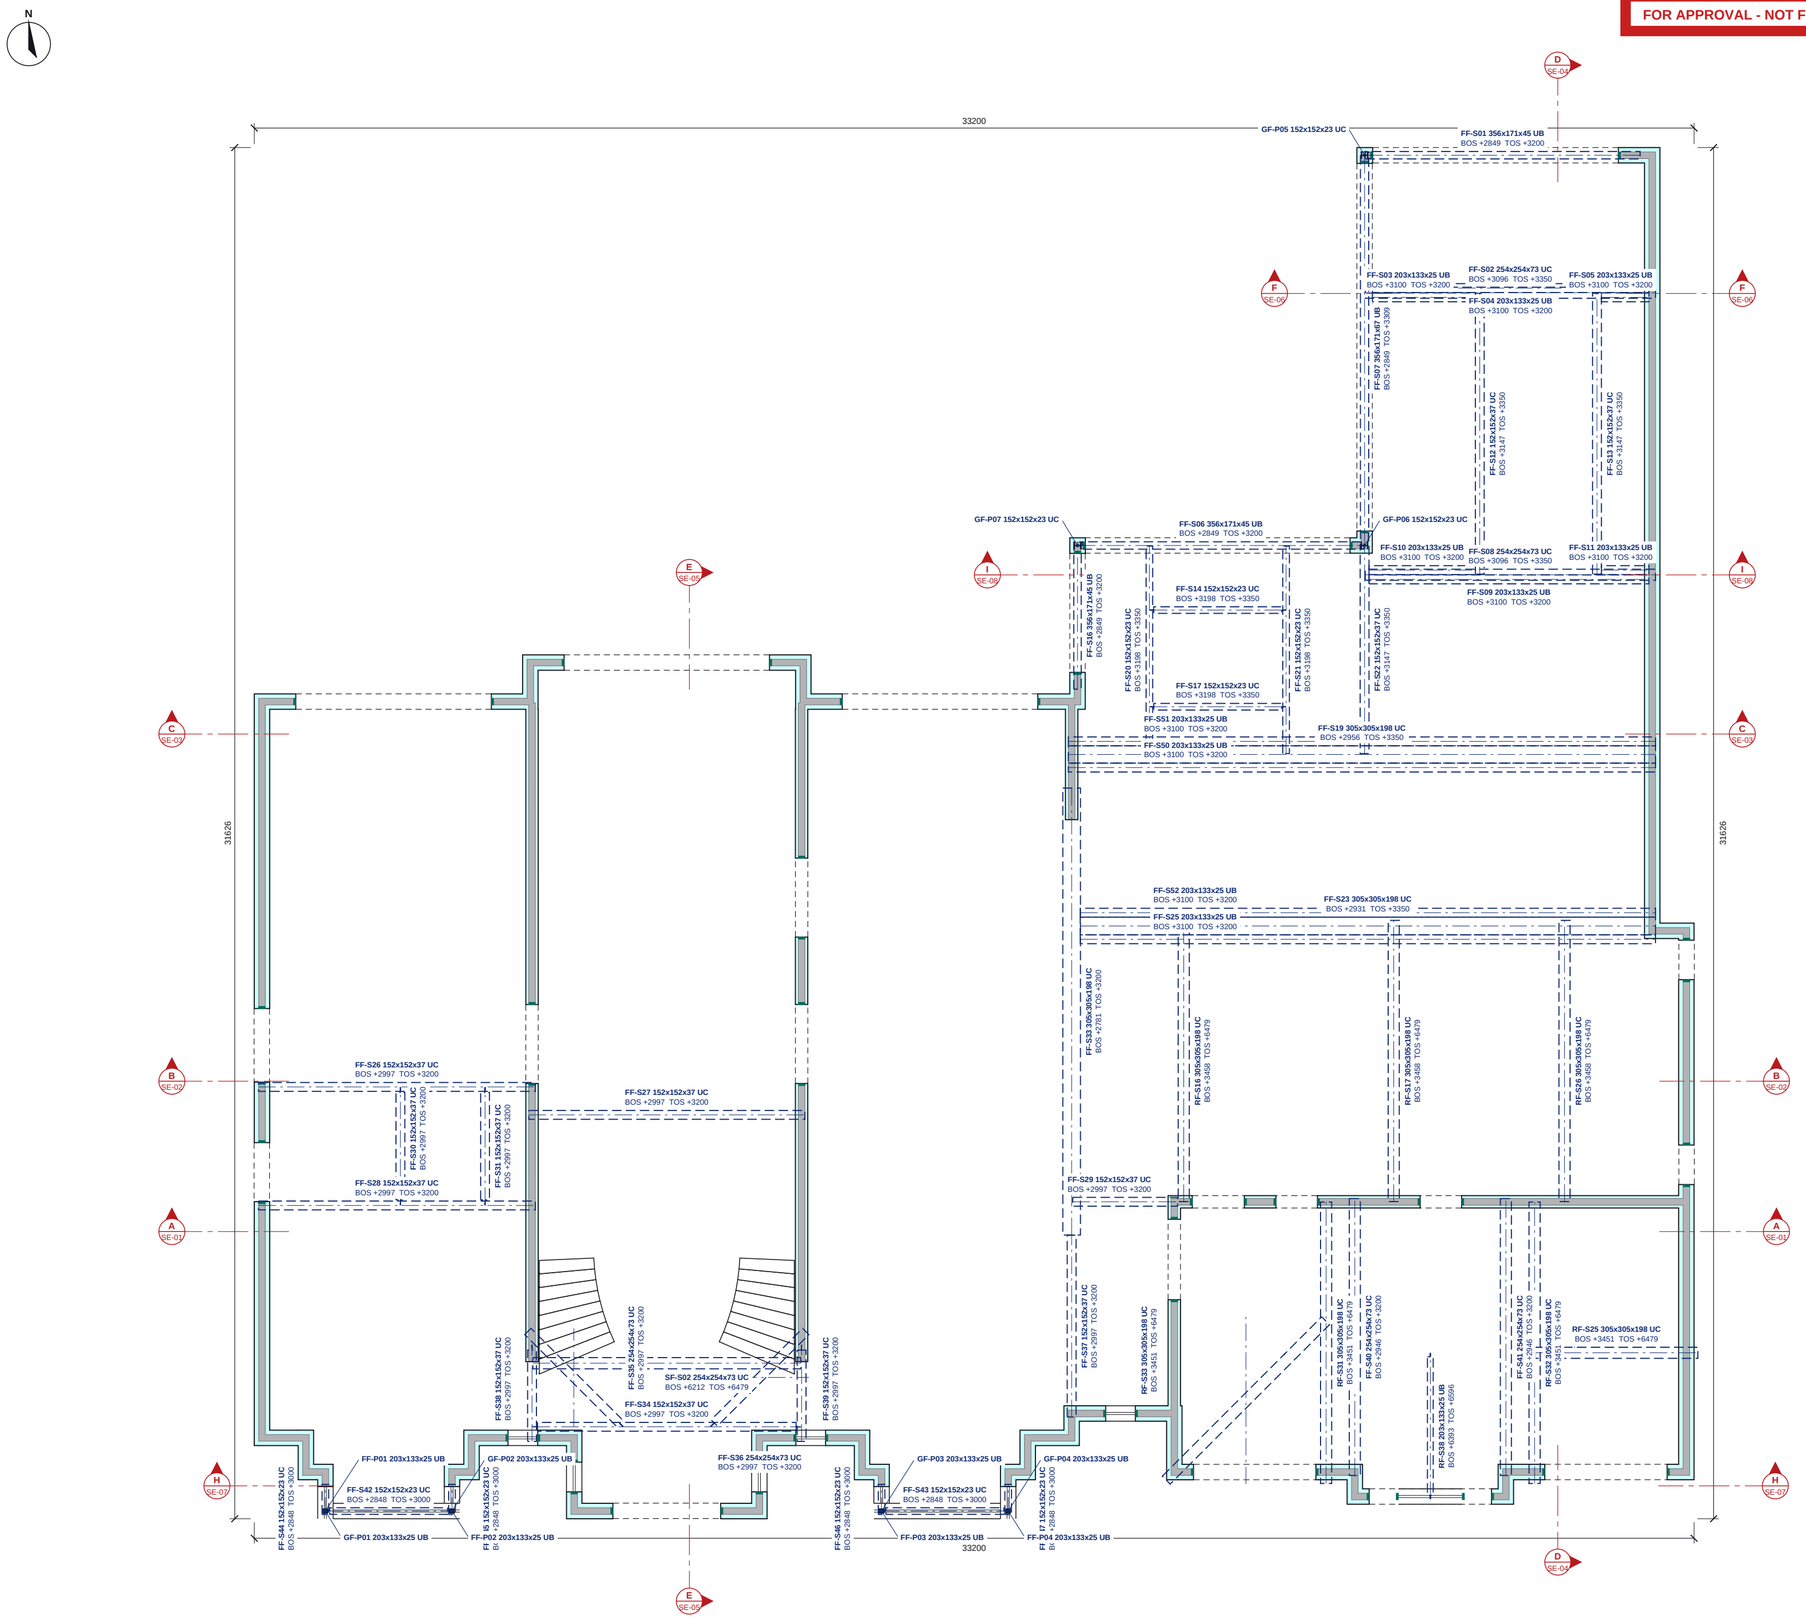

GF STEEL OVER ICF

Scale 1:100 @ A2 | Plan cut at +1380

GF STEEL SCHEDULE

STEEL SCHEDULE

Mark	Section (engineer)	BOS	TOS
FF-S01	356x171x45 UB S355	+2849	+3200
FF-S02	254x254x73 UC S355	+3096	+3350
FF-S03	203x133x25 UB S355	+3100	+3200
FF-S04	203x133x25 UB S355	+3100	+3200
FF-S05	203x133x25 UB S355	+3100	+3200
FF-S06	356x171x45 UB S355	+2849	+3200
FF-S07	356x171x67 UB S355	+2849	+3309
FF-S08	254x254x73 UC S355	+3096	+3350
FF-S09	203x133x25 UB S355	+3100	+3200
FF-S10	203x133x25 UB S355	+3100	+3200
FF-S11	203x133x25 UB S355	+3100	+3200
FF-S12	152x152x37 UC S355	+3147	+3350
FF-S13	152x152x37 UC S355	+3147	+3350
FF-S14	152x152x23 UC S355	+3198	+3350
FF-S16	356x171x45 UB S355	+2849	+3200
FF-S17	152x152x23 UC S355	+3198	+3350
FF-S19	305x305x198 UC S355	+2956	+3350
FF-S20	152x152x23 UC S355	+3198	+3350
FF-S21	152x152x23 UC S355	+3198	+3350
FF-S22	152x152x37 UC S355	+3147	+3350
FF-S23	305x305x198 UC S355	+2931	+3350
FF-S25	203x133x25 UB S355	+3100	+3200
FF-S26	152x152x37 UC S355	+2997	+3200
FF-S27	152x152x37 UC S355	+2997	+3200
FF-S28	152x152x37 UC S355	+2997	+3200
FF-S29	152x152x37 UC S355	+2997	+3200
FF-S30	152x152x37 UC S355	+2997	+3200
FF-S31	152x152x37 UC S355	+2997	+3200
FF-S33	305x305x198 UC S355	+2781	+3200
FF-S34	152x152x37 UC S355	+2997	+3200
FF-S35	254x254x73 UC S355	+2997	+3200
FF-S36	254x254x73 UC S355	+2997	+3200
FF-S37	152x152x37 UC S355	+2997	+3200
FF-S38	152x152x37 UC S355	+2997	+3200
FF-S39	152x152x37 UC S355	+2997	+3200
FF-S40	254x254x73 UC S355	+2946	+3200
FF-S41	254x254x73 UC S355	+2946	+3200
FF-S42	152x152x23 UC S355	+2848	+3000
FF-S43	152x152x23 UC S355	+2848	+3000
FF-S44	152x152x23 UC S355	+2848	+3000
FF-S45	152x152x23 UC S355	+2848	+3000
FF-S46	152x152x23 UC S355	+2848	+3000
FF-S47	152x152x23 UC S355	+2848	+3000
FF-S50	203x133x25 UB S355	+3100	+3200
FF-S51	203x133x25 UB S355	+3100	+3200
FF-S52	203x133x25 UB S355	+3100	+3200
RF-S16	305x305x198 UC S355	+3458	+6479
RF-S17	305x305x198 UC S355	+3458	+6479
RF-S25	305x305x198 UC S355	+3451	+6479
RF-S26	305x305x198 UC S355	+3458	+6479
RF-S31	305x305x198 UC S355	+3451	+6479
RF-S32	305x305x198 UC S355	+3451	+6479
RF-S33	305x305x198 UC S355	+3451	+6479
RF-S38	203x133x25 UB S355	+6393	+6596
SF-S02	254x254x73 UC S355	+6212	+6479
FF-P01	203x133x25 UB S355	+3350	+5923
FF-P02	203x133x25 UB S355	+3350	+5923
FF-P03	203x133x25 UB S355	+3350	+5923
FF-P04	203x133x25 UB S355	+3350	+5923
GF-P01	203x133x25 UB S355	-100	+2848
GF-P02	203x133x25 UB S355	-100	+2848
GF-P03	203x133x25 UB S355	-100	+2848
GF-P04	203x133x25 UB S355	-100	+2848
GF-P05	152x152x23 UC S355	-100	+2849
GF-P06	152x152x23 UC S355	-100	+2849
GF-P07	152x152x23 UC S355	-100	+2849

BOS / TOS = bottom / top of steel above GF FFL (C-1 columns: base / top).

NOTES

1. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
2. Lintel (L-n) and steel (B-n, C-1) marks from Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -, which takes precedence.
3. Masonry walls shown for context.
4. Steel over dashed. BOS / TOS = bottom / top of steel above GF FFL.
5. Steel over the ICF at this level, dashed, with the engineer's member marks as modelled; BOS / TOS = bottom / top of steel above GF FFL. Columns cut at the plan level shown solid.
6. Walls and openings: see UKPCS-003-GA-01 for the ICF setting out, opening sizes and the opening schedule.
7. No structural grid is registered on this issue.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments
P03	19.10.26	Revised to the P02 comments

Nudura™ BuildEase

CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE
GF STEEL OVER ICF
Steel over the ICF, marked and scheduled

SCALE	SIZE	DATE
1:100	A2	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-GS-01	P03

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.