
FOR APPROVAL - NOT FOR CONSTRUCTION



SECTION I-I (PART 1 OF 2)

Scale 1:50 @ A3 | Looking north; levels above GF FFL

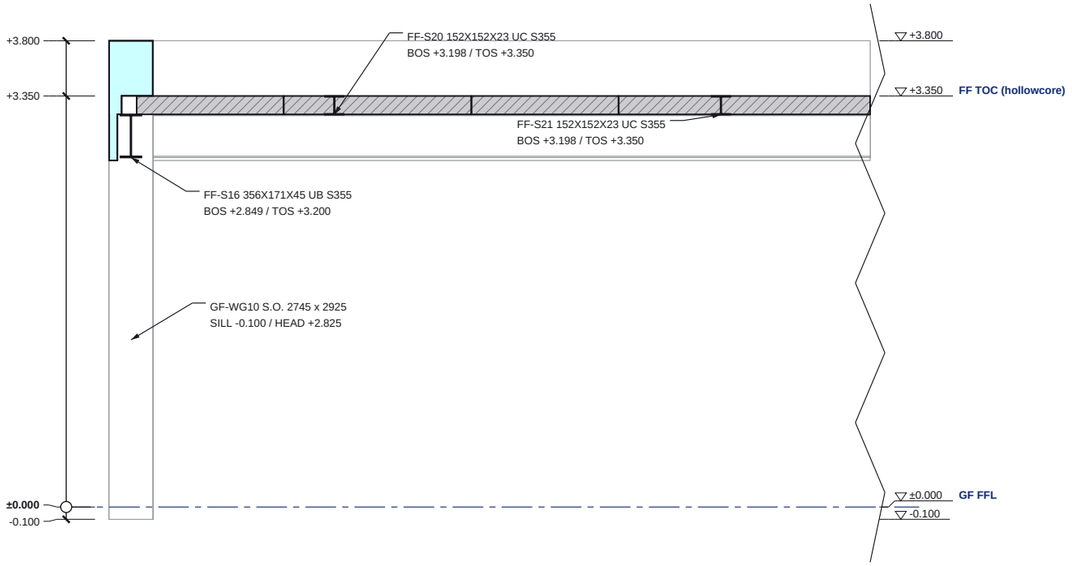

SECTION I-I (PART 2 OF 2)

Scale 1:50 @ A3 | Looking north; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Beyond the cut (line work)

0 1 2m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

SECTION I-I SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-0.100	168.648
GF FFL	±0.000	168.748
FF TOC (hollowcore)	+3.350	172.098
top of ICF W07	+3.800	172.548

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S08	254x254x73 UC S355	+3.096	+3.350
FF-S16	356x171x45 UB S355	+2.849	+3.200
FF-S20	152x152x23 UC S355	+3.198	+3.350
FF-S21	152x152x23 UC S355	+3.198	+3.350
FF-S22	152x152x37 UC S355	+3.147	+3.350

SECTION KEY

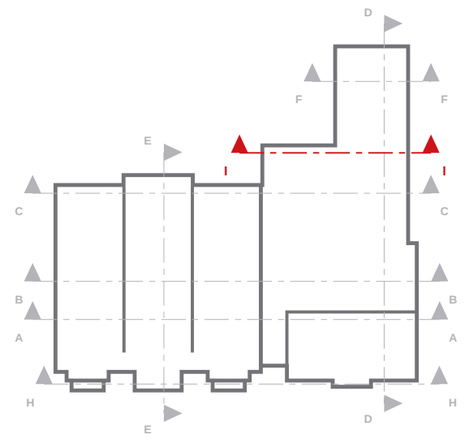

NOTES

1. Section I-I is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL (168.748 AOD); the level table gives AOD.
3. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
4. Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02 in the approval drawings pack.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments
P03	19.10.26	Revised to the P02 comments

Nudura™ BuildEase

CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE
SECTION I-I
ICF section with levels and build-ups

SCALE	SIZE	DATE
1:50	A3	19.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-SE-08	P03