
FOR APPROVAL - NOT FOR CONSTRUCTION

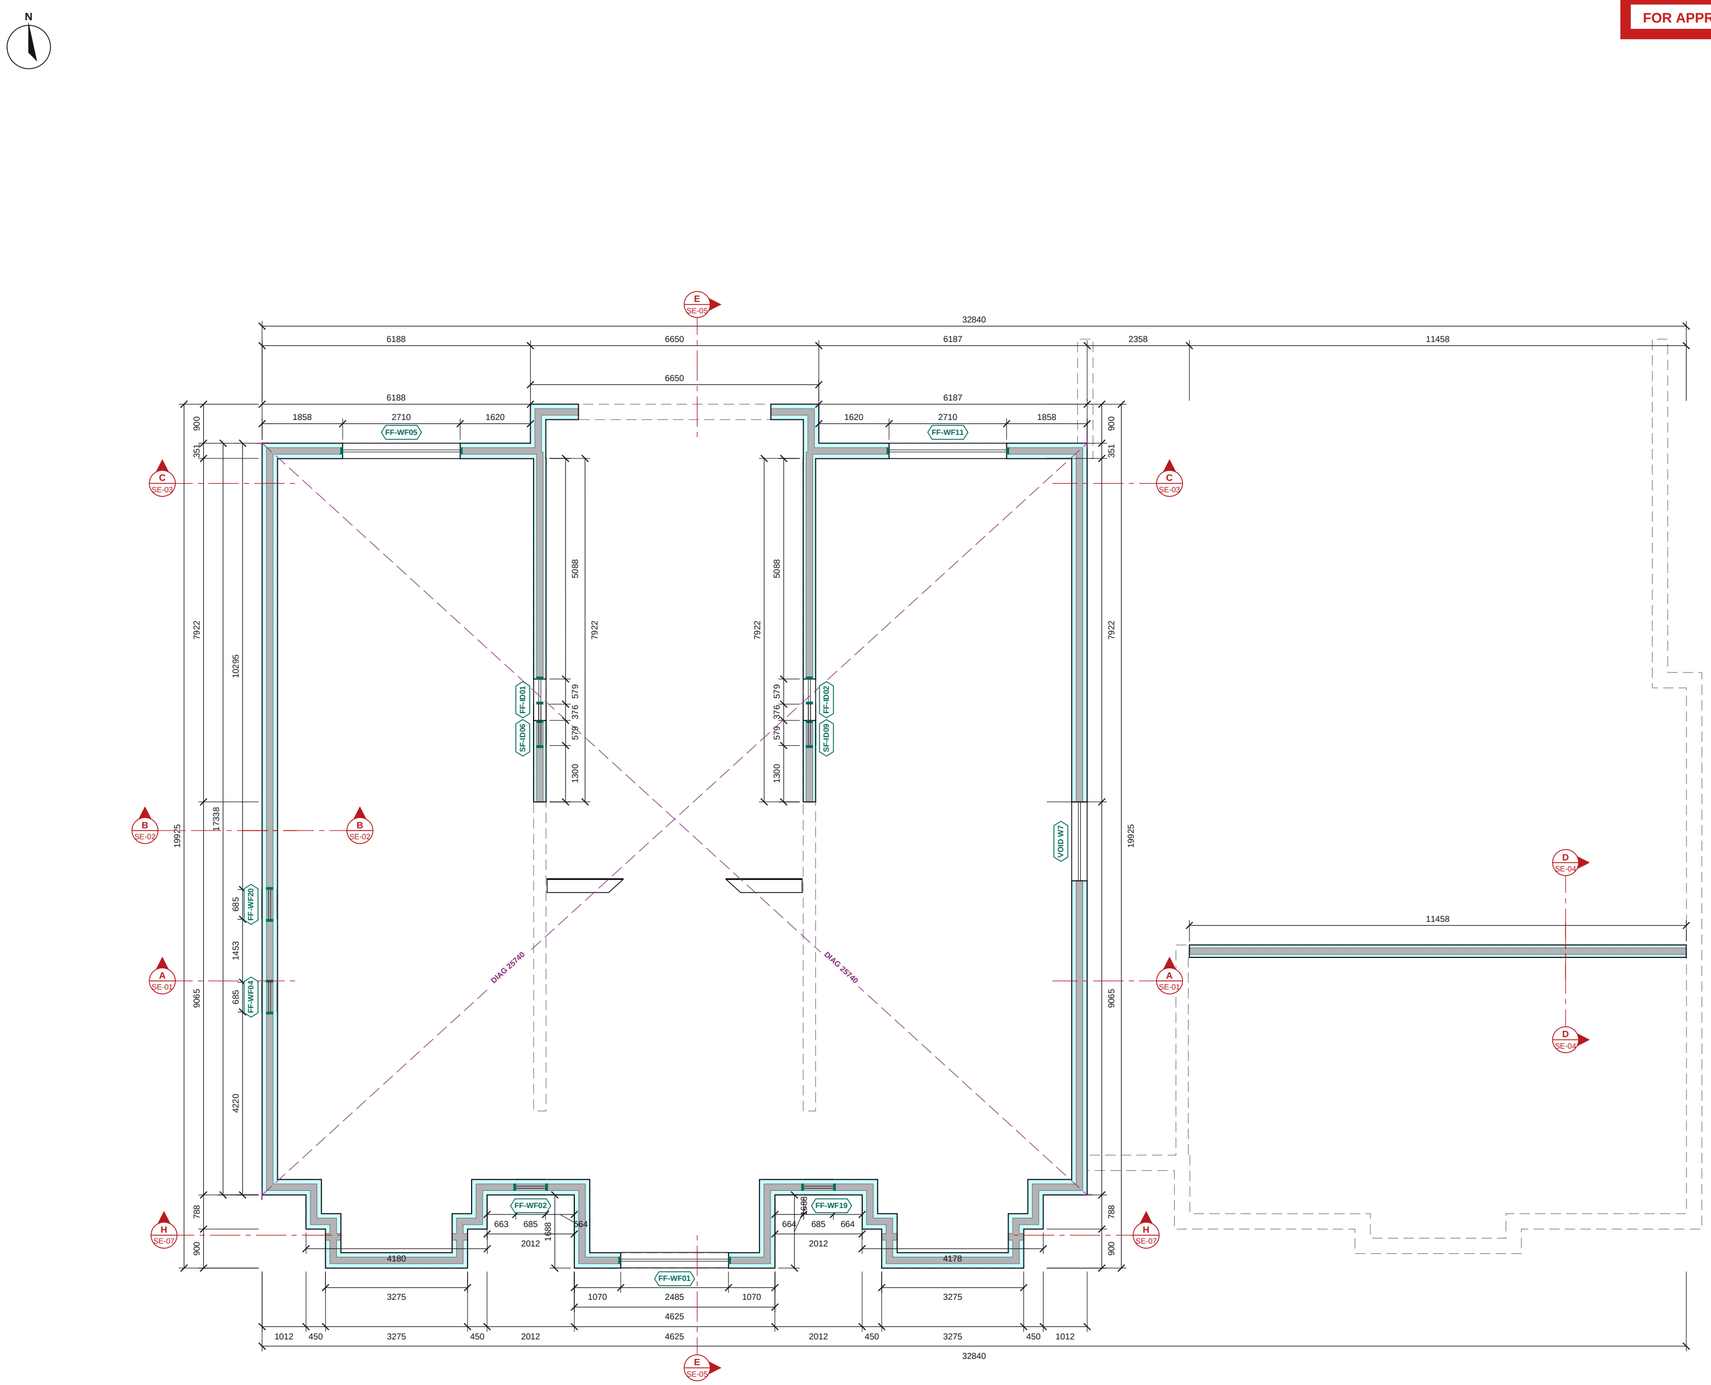

EPS insulation (Nudura form)
Concrete core
End cap at opening
ICF walls of the level below (dashed)
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

FF ICF PLAN

Scale 1:100 @ A2 | Plan cut at +3950

0 1 2 3 4 5m

FF ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
FF-ID01	955	2475	+3350	+5825	-
FF-ID02	955	2475	+3350	+5825	-
FF-WF01	2485	2250	+3875	+6125	-
FF-WF02	685	1275	+4250	+5525	-
FF-WF04	685	1350	+4250	+5600	-
FF-WF05	2710	1725	+3875	+5600	-
FF-WF11	2710	1725	+3875	+5600	-
FF-WF19	685	1275	+4250	+5525	-
FF-WF20	685	1350	+4250	+5600	-
SF-ID06	955	2400	+6500	+8900	-
SF-ID09	955	2400	+6500	+8900	-
VOID W7	1820	3000	+3425	+6425	-

Structural openings in the ICF; sill and head above GF FFL. VOID = subtract cut in the ICF (no end caps / lintel buck modelled).

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL (168.748 AOD). Sill / head = structural opening in the ICF.
3. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
4. Lintel (L-n) and steel (B-n, C-1) marks from Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -, which takes precedence.
5. Masonry walls shown for context.
6. Steel over the ICF: see UKPCS-003-GS-02.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments

Nudura™ BuildEase

CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE
FF ICF GENERAL ARRANGEMENT
ICF walls, openings and setting out

SCALE	SIZE	DATE
1:100	A2	15.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-GA-02	P02

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.