
FOR APPROVAL - NOT FOR CONSTRUCTION

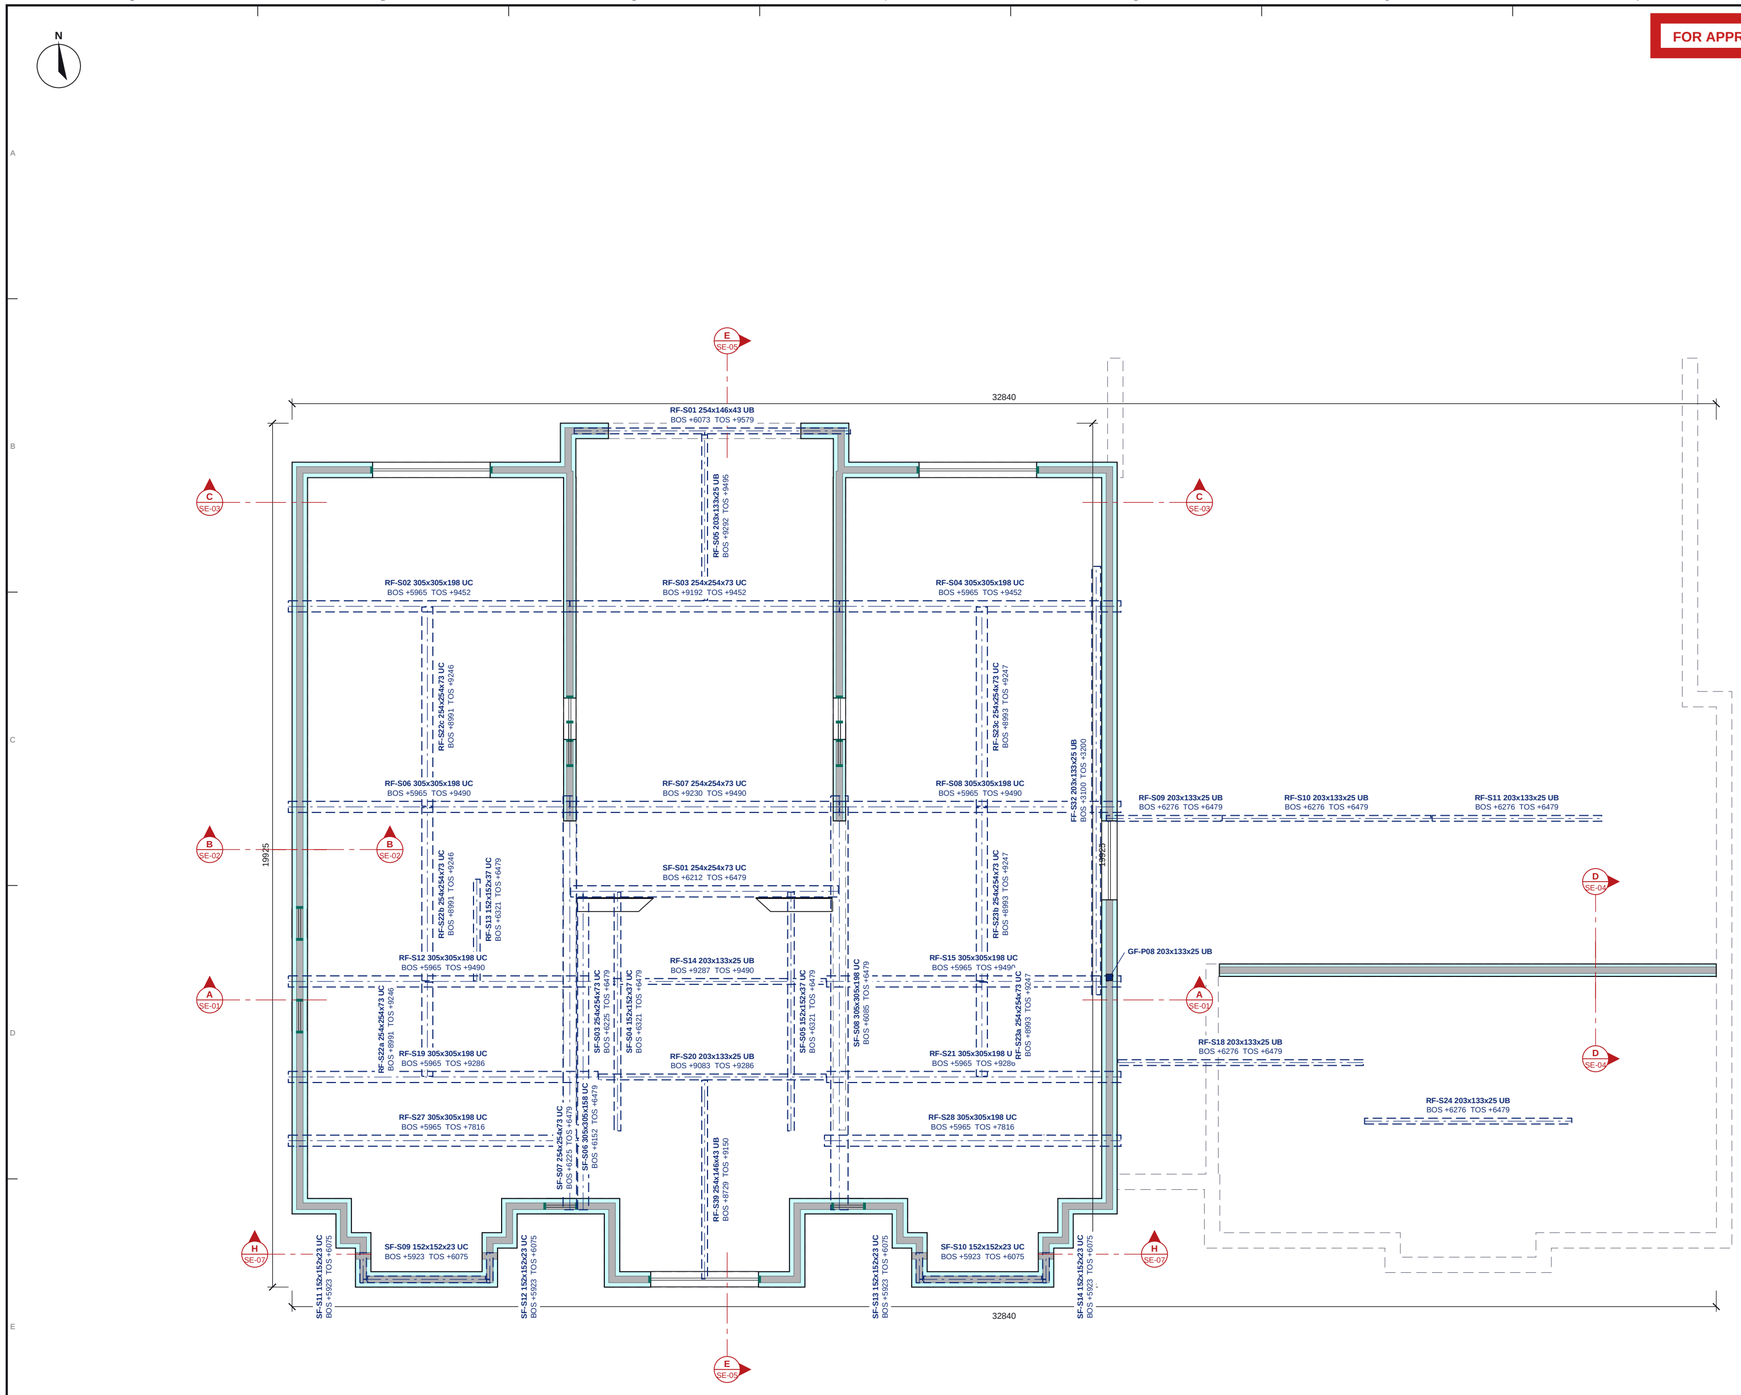

ICF wall at the plan cut (see the ICF sheet)
ICF walls of the level below (dashed)
Steel over (dashed), marked
Steel column cut
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Section line (see SE sheet)

FF STEEL OVER ICF

Scale 1:100 @ A2 | Plan cut at +3950

0 1 2 3 4 5m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

FF STEEL SCHEDULE

STEEL SCHEDULE

Mark	Section (engineer)	BOS	TOS
FF-S32	203x133x25 UB S355	+3100	+3200
RF-S01	254x146x43 UB S355	+6073	+9579
RF-S02	305x305x198 UC S355	+5965	+9452
RF-S03	254x254x73 UC S355	+9192	+9452
RF-S04	305x305x198 UC S355	+5965	+9452
RF-S05	203x133x25 UB S355	+9292	+9495
RF-S06	305x305x198 UC S355	+5965	+9490
RF-S07	254x254x73 UC S355	+9230	+9490
RF-S08	305x305x198 UC S355	+5965	+9490
RF-S09	203x133x25 UB S355	+6276	+6479
RF-S10	203x133x25 UB S355	+6276	+6479
RF-S11	203x133x25 UB S355	+6276	+6479
RF-S12	305x305x198 UC S355	+5965	+9490
RF-S13	152x152x37 UC S355	+6321	+6479
RF-S14	203x133x25 UB S355	+9287	+9490
RF-S15	305x305x198 UC S355	+5965	+9490
RF-S18	203x133x25 UB S355	+6276	+6479
RF-S19	305x305x198 UC S355	+5965	+9286
RF-S20	203x133x25 UB S355	+9083	+9286
RF-S21	305x305x198 UC S355	+5965	+9286
RF-S22a	254x254x73 UC S355	+8991	+9246
RF-S22b	254x254x73 UC S355	+8991	+9246
RF-S22c	254x254x73 UC S355	+8991	+9246
RF-S23a	254x254x73 UC S355	+8993	+9247
RF-S23b	254x254x73 UC S355	+8993	+9247
RF-S23c	254x254x73 UC S355	+8993	+9247
RF-S24	203x133x25 UB S355	+6276	+6479
RF-S27	305x305x198 UC S355	+5965	+7816
RF-S28	305x305x198 UC S355	+5965	+7816
RF-S39	254x146x43 UB S355	+8729	+9150
SF-S01	254x254x73 UC S355	+6212	+6479
SF-S03	254x254x73 UC S355	+6225	+6479
SF-S04	152x152x37 UC S355	+6321	+6479
SF-S05	152x152x37 UC S355	+6321	+6479
SF-S06	305x305x158 UC S355	+6152	+6479
SF-S07	254x254x73 UC S355	+6225	+6479
SF-S08	305x305x198 UC S355	+6085	+6479
SF-S09	152x152x23 UC S355	+5923	+6075
SF-S10	152x152x23 UC S355	+5923	+6075
SF-S11	152x152x23 UC S355	+5923	+6075
SF-S12	152x152x23 UC S355	+5923	+6075
SF-S13	152x152x23 UC S355	+5923	+6075
SF-S14	152x152x23 UC S355	+5923	+6075
GF-P08	203x133x25 UB S355	-100	+2781

BOS / TOS = bottom / top of steel above GF FFL (C-1 columns: base / top).

NOTES

1. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
2. Lintel (L-n) and steel (B-n, C-1) marks from Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -, which takes precedence.
3. Masonry walls shown for context.
4. Steel over dashed. BOS / TOS = bottom / top of steel above GF FFL.
5. Steel over the ICF at this level, dashed, with the engineer's member marks as modelled; BOS / TOS = bottom / top of steel above GF FFL. Columns cut at the plan level shown solid.
6. Walls and openings: see UKPCS-003-GA-02 for the ICF setting out, opening sizes and the opening schedule.
7. No structural grid is registered on this issue.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments

Nudura™ BuildEase

CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE
FF STEEL OVER ICF
Steel over the ICF, marked and scheduled

SCALE	SIZE	DATE
1:100	A2	15.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-GS-02	P02