UKPCS-003

Approval Drawings

ICF general arrangements, steel over ICF, elevations, sections

Icf Homes - Dendrons

ISSUED	16.10.26
STATUS	As the title blocks
SHEETS	14 drawings + 2 front pages
DRAWN BY	BuildEase


NOTES ON THIS ISSUE

1. P02 revises the P01 approval issue (23.09.26) to the P01 comments and the architect's 05.10 drawings: walls snapped onto the architect's ICF core, openings re-read from the 05.10 elevations, external GF door sills at -100, bay voids raised to the bay beam tops with the ICF sitting on the lintel beams, and the gables taken to the rafter-top line.
2. Structural grids are not shown: the architect's plan DXF is not registered on this issue. Setting out is by the perimeter dimension rows and the check diagonals between external ICF corners.
3. Lintel marks are not shown: the engineer's PDF set is not registered on this issue. Every ICF opening carries the RC lintel of Tier Consult S-120 / S-121; steel over an opening is named on the plan and in the schedule. Steel marks and sections are the engineer's numbering as modelled.
4. Steel members, floors and the main stair are read from the coordinated model. No steel pockets are formed in the ICF: beam ends are site-cut to the pocket schedule.
5. The 37 short walls between bay and return corners carry no forms of their own: the corner forms fill them.
6. P01's engineer question EQ-01 (SF-S06 / SF-S08 over FF-WF02 / FF-WF19) is withdrawn: the revised window heads leave 626 / 560 mm of wall under the beams, so the S-121 lintel fits.

CONTENTS

SHEET	TITLE	PAGE
UKPCS-003-GA-01	GF ICF General Arrangement	3
UKPCS-003-GA-02	FF ICF General Arrangement	4
UKPCS-003-GS-01	GF Steel over ICF	5
UKPCS-003-GS-02	FF Steel over ICF	6
UKPCS-003-EL-01	North and South Elevations	7
UKPCS-003-EL-02	East and West Elevations	8
UKPCS-003-SE-01	Section A-A	9
UKPCS-003-SE-02	Section B-B	10
UKPCS-003-SE-03	Section C-C	11
UKPCS-003-SE-04	Section D-D	12
UKPCS-003-SE-05	Section E-E	13
UKPCS-003-SE-06	Section F-F	14
UKPCS-003-SE-07	Section H-H	15
UKPCS-003-SE-08	Section I-I	16

FOR APPROVAL - NOT FOR CONSTRUCTION

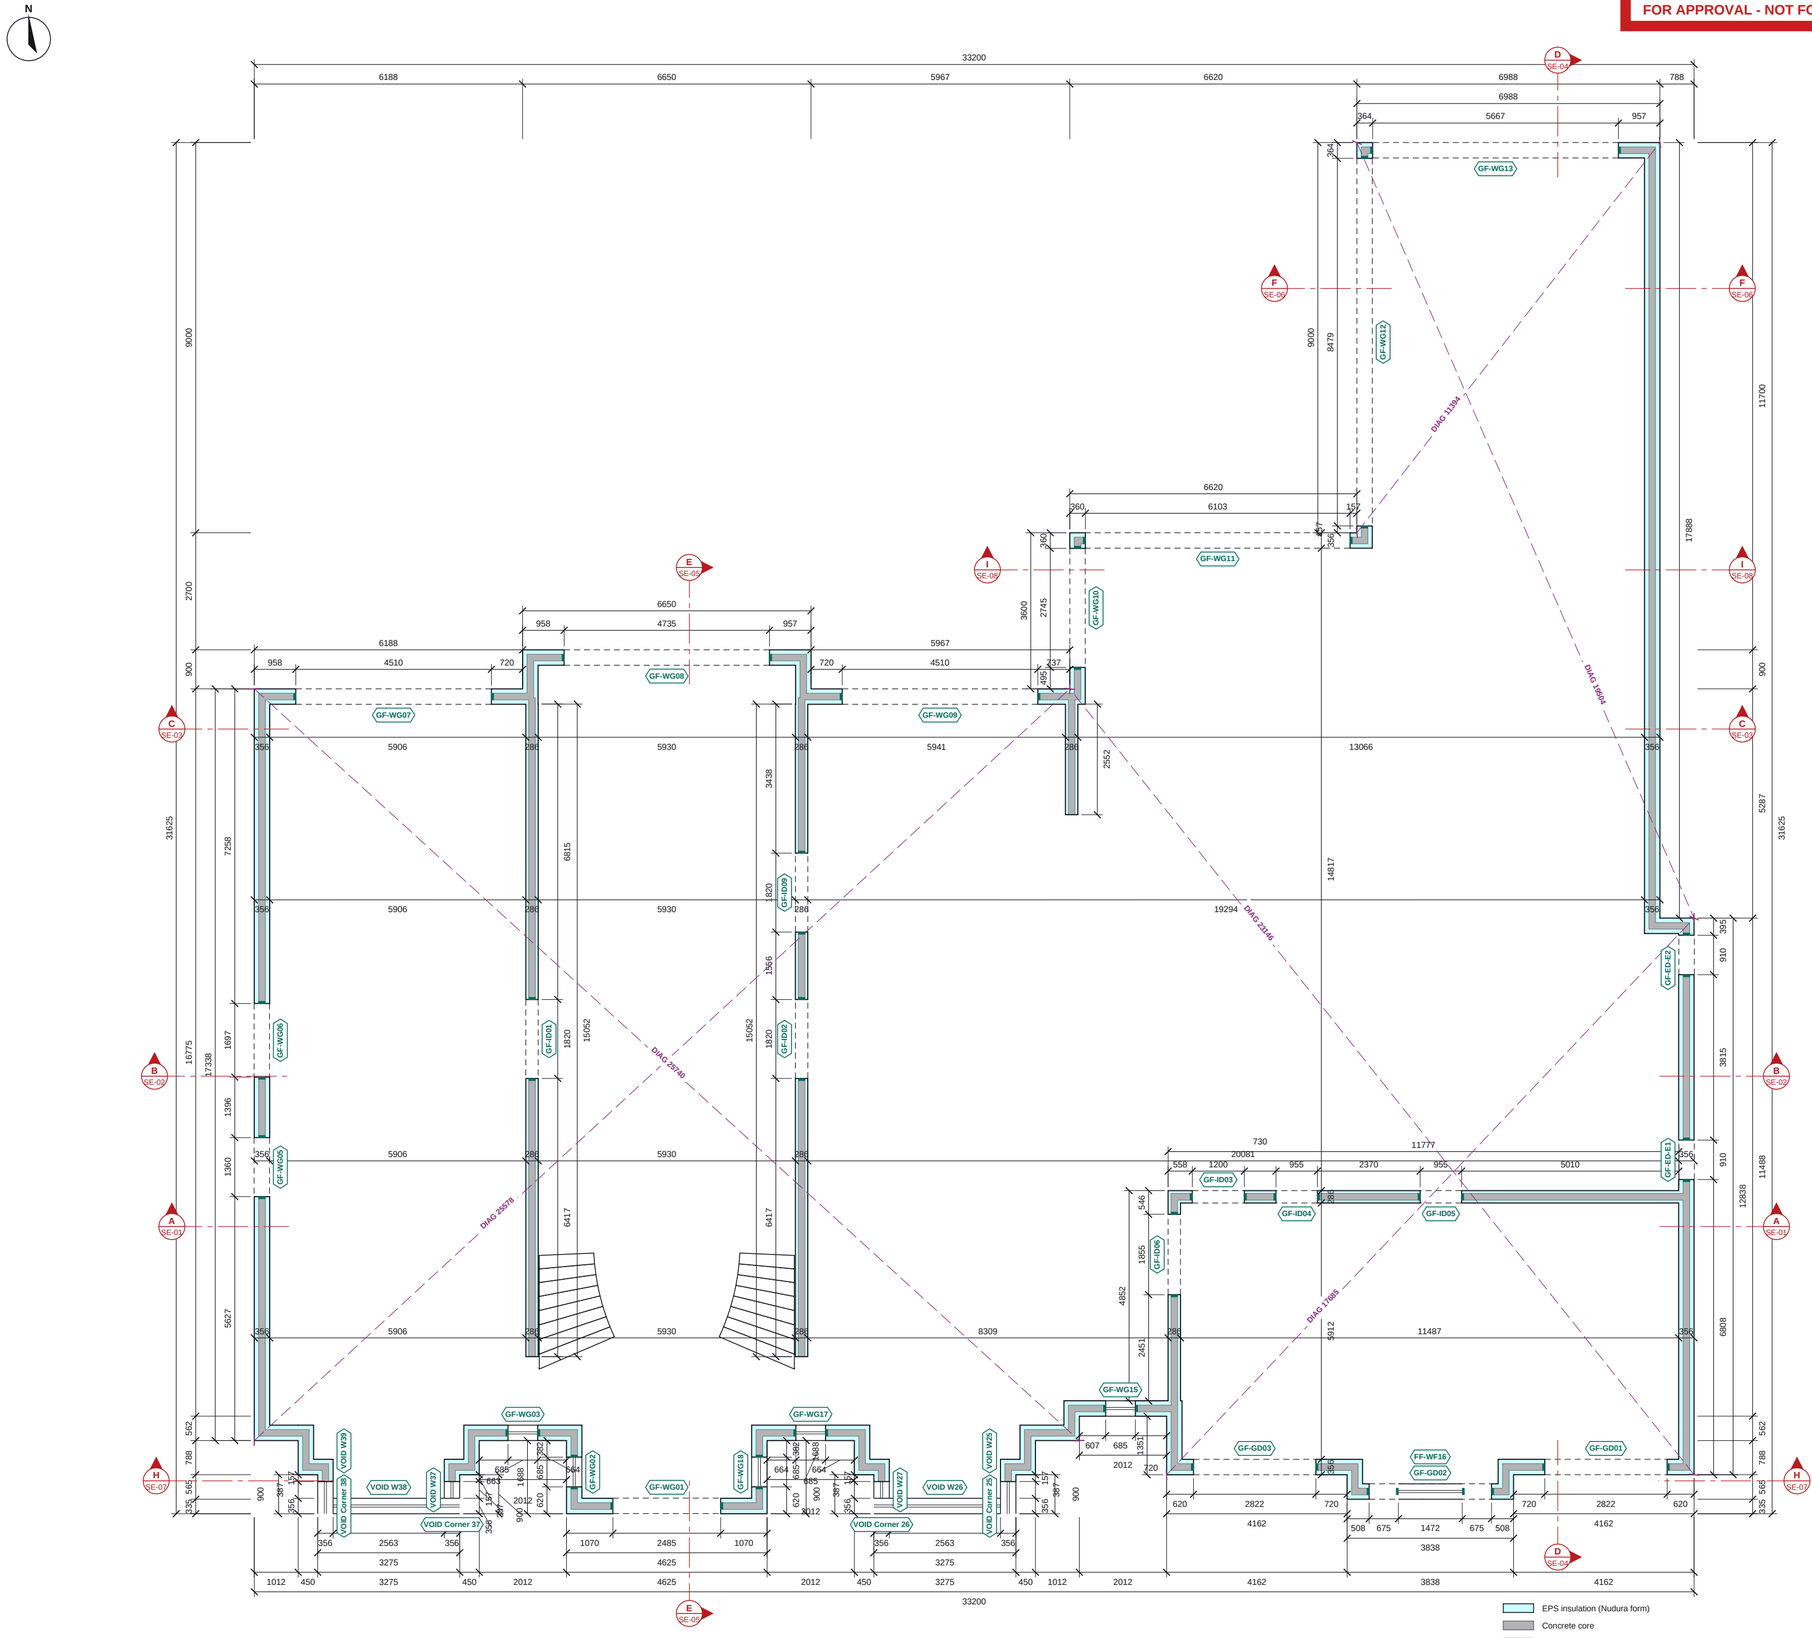

GF ICF PLAN

Scale 1:100 @ A2 | Plan cut at +1380

0 1 2 3 4 5m

GF ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
FF-WF16	1472	2100	+3425	+5525	-
GF-ED-E1	910	2475	-100	+2375	-
GF-ED-E2	910	2475	-100	+2375	-
GF-GD01	2822	2775	-100	+2675	-
GF-GD02	2822	2775	-100	+2675	-
GF-GD03	2822	2775	-100	+2675	-
GF-ID01	1820	2775	-100	+2675	-
GF-ID02	1820	2775	-100	+2675	-
GF-ID03	1200	2775	-100	+2675	-
GF-ID04	955	2775	-100	+2675	-
GF-ID05	955	2775	-100	+2675	-
GF-ID06	1855	2775	-100	+2675	-
GF-ID09	1820	2775	-100	+2675	-
GF-WG01	2485	3000	-100	+2900	-
GF-WG02	685	2100	+725	+2825	-
GF-WG03	685	2100	+725	+2825	-
GF-WG05	1360	2925	-100	+2825	-
GF-WG06	1697	2925	-100	+2825	-
GF-WG07	4510	2925	-100	+2825	-
GF-WG08	4735	2925	-100	+2825	-
GF-WG09	4510	2925	-100	+2825	-
GF-WG10	2745	3300	-100	+3200	-
GF-WG11	6103	3300	-100	+3200	-
GF-WG12	8479	3409	-100	+3309	-
GF-WG13	5667	3300	-100	+3200	-
GF-WG15	685	1800	+1025	+2825	-
GF-WG17	685	2100	+725	+2825	-
GF-WG18	685	2100	+725	+2825	-
VOID Corner 25	356	2280	+725	+3005	-
VOID Corner 26	356	2280	+725	+3005	-
VOID Corner 37	356	2280	+725	+3005	-
VOID Corner 38	356	2280	+725	+3005	-
VOID W25	387	2280	+725	+3005	-
VOID W26	2563	2280	+725	+3005	-
VOID W27	387	2280	+725	+3005	-
VOID W37	387	2280	+725	+3005	-
VOID W38	2563	2280	+725	+3005	-
VOID W39	387	2280	+725	+3005	-

Structural openings in the ICF; sill and head above GF FFL. VOID = subtract cut in the ICF (no end caps / lintel buck modelled).

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL (168.748 AOD). Sill / head = structural opening in the ICF.
3. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
4. Lintel (L-n) and steel (B-n, C-1) marks from Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -, which takes precedence.
5. Masonry walls shown for context.
6. Steel over the ICF: see UKPCS-003-GS-01.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments

Nudura™ BuildEase

CLIENT	PROJECT
ICF Homes	Dendrons


DRAWING TITLE
GF ICF GENERAL ARRANGEMENT
ICF walls, openings and setting out

SCALE	SIZE	DATE
1:100	A2	15.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-GA-01	P02

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

FOR APPROVAL - NOT FOR CONSTRUCTION

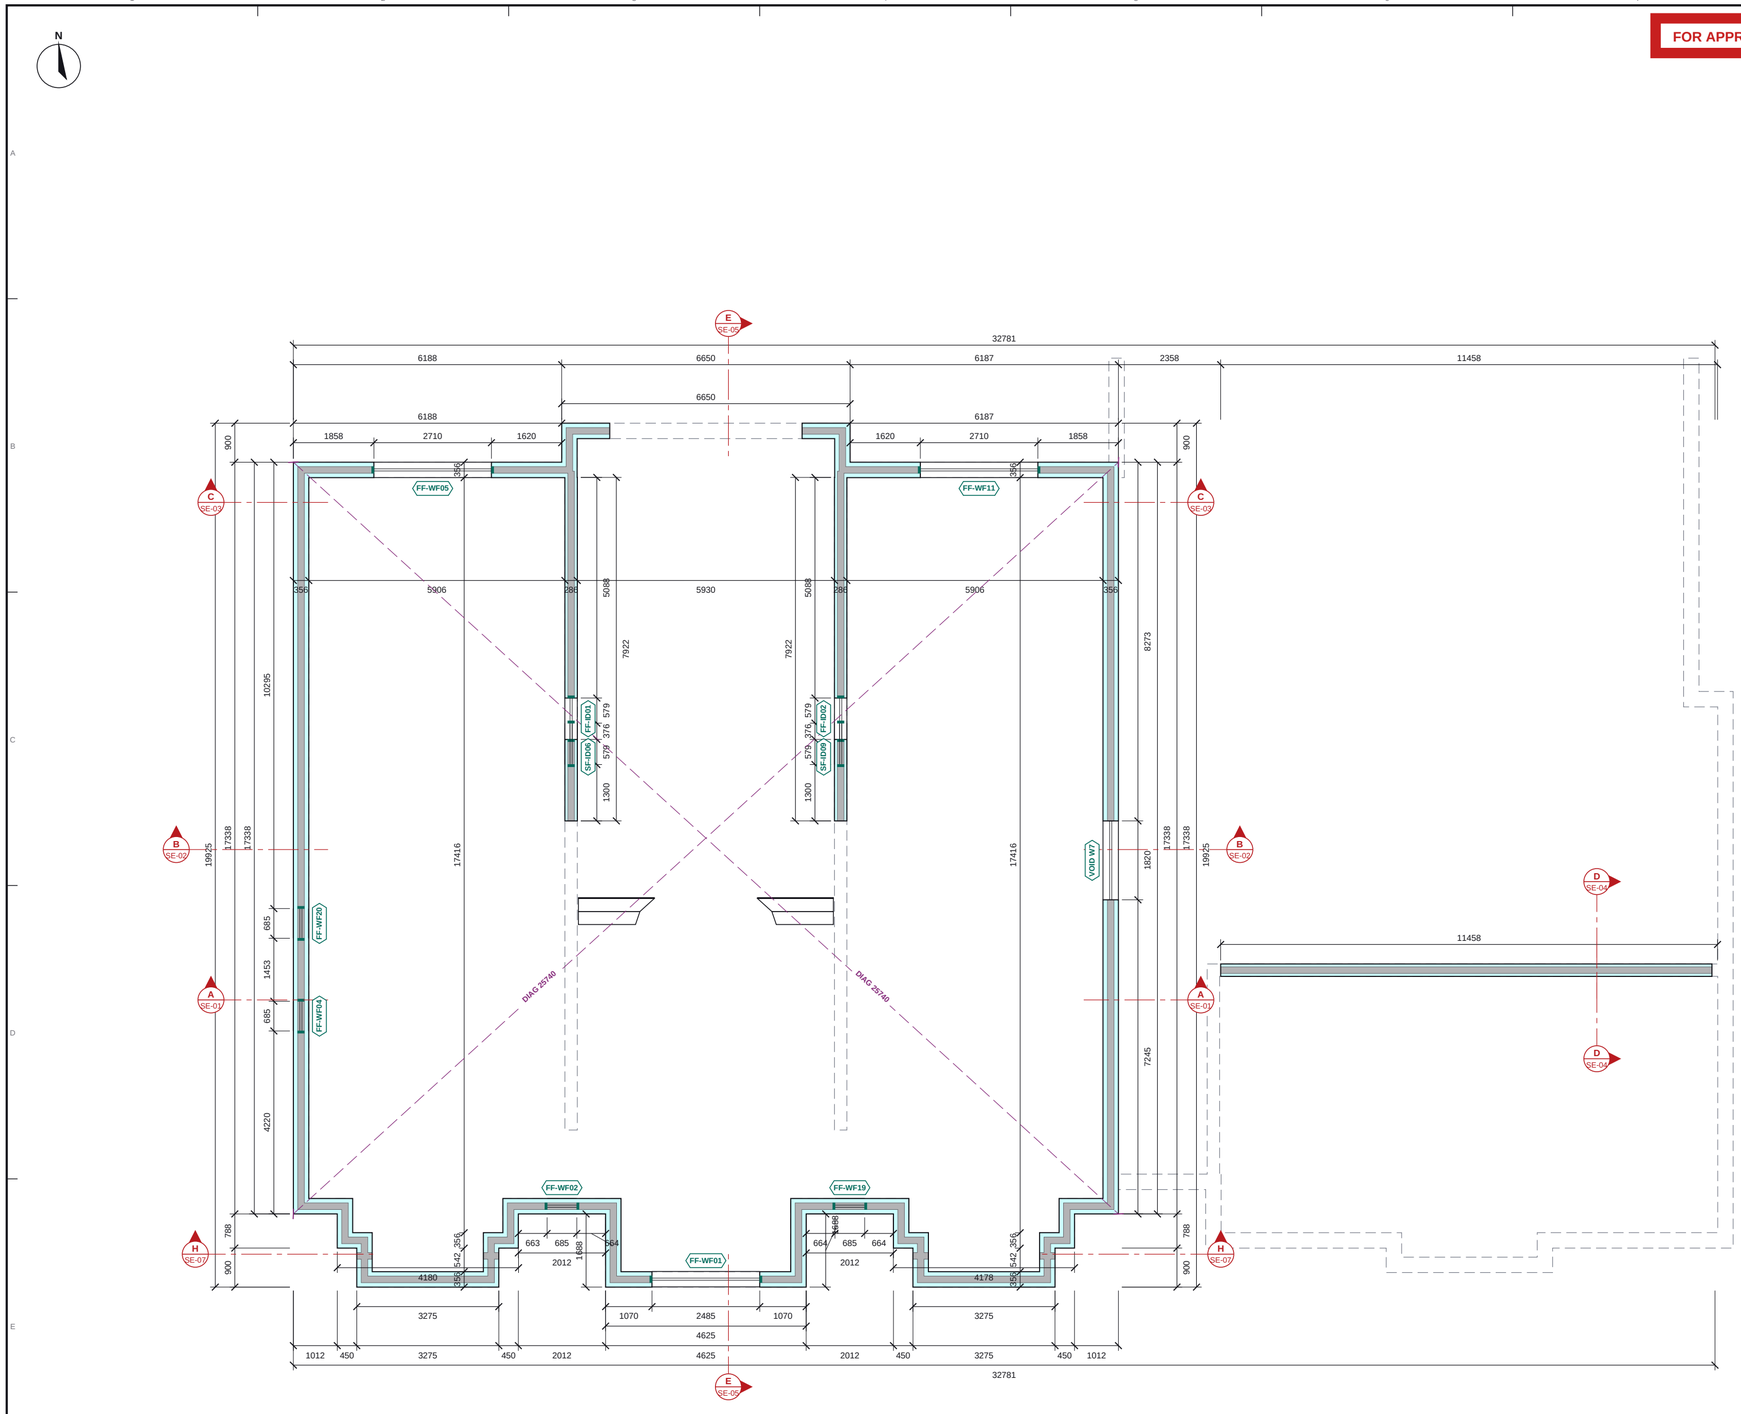

EPS insulation (Nudura form)
Concrete core
End cap at opening
ICF walls of the level below (dashed)
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

FF ICF PLAN

Scale 1:100 @ A2 | Plan cut at +4100

0 1 2 3 4 5m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

FF ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
FF-ID01	955	2475	+3350	+5825	-
FF-ID02	955	2475	+3350	+5825	-
FF-WF01	2485	2250	+3875	+6125	-
FF-WF02	685	1275	+4250	+5525	-
FF-WF04	685	1350	+4250	+5600	-
FF-WF05	2710	1725	+3875	+5600	-
FF-WF11	2710	1725	+3875	+5600	-
FF-WF19	685	1275	+4250	+5525	-
FF-WF20	685	1350	+4250	+5600	-
SF-ID06	955	2400	+6500	+8900	-
SF-ID09	955	2400	+6500	+8900	-
VOID W7	1820	3000	+3425	+6425	-

Structural openings in the ICF; sill and head above GF FFL. VOID = subtract cut in the ICF (no end caps / lintel buck modelled).

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL (168.748 AOD). Sill / head = structural opening in the ICF.
3. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
4. Lintel (L-n) and steel (B-n, C-1) marks from Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -, which takes precedence.
5. Masonry walls shown for context.
6. Steel over the ICF: see UKPCS-003-GS-02.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments

Nudura™ BuildEase

CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE
FF ICF GENERAL ARRANGEMENT
ICF walls, openings and setting out

SCALE	SIZE	DATE
1:100	A2	15.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-GA-02	P02

FOR APPROVAL - NOT FOR CONSTRUCTION



GF STEEL OVER ICF

Scale 1:100 @ A2 | Plan cut at +1380

0 1 2 3 4 5m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

GF STEEL SCHEDULE

STEEL SCHEDULE

Mark	Section (engineer)	BOS	TOS
FF-S01	254x146x43 UB S355	+2849	+3200
FF-S02	254x254x73 UC S355	+3096	+3350
FF-S03	203x133x25 UB S355	+3100	+3200
FF-S04	203x133x25 UB S355	+3100	+3200
FF-S06	254x146x43 UB S355	+2849	+3200
FF-S07	254x146x43 UB S355	+2849	+3309
FF-S08	254x254x73 UC S355	+3096	+3350
FF-S09	203x133x25 UB S355	+3100	+3200
FF-S10	203x133x25 UB S355	+3100	+3200
FF-S12	152x152x37 UC S355	+3147	+3350
FF-S13	152x152x37 UC S355	+3147	+3350
FF-S14	152x152x23 UC S355	+3198	+3350
FF-S16	254x146x43 UB S355	+2849	+3200
FF-S17	152x152x23 UC S355	+3198	+3350
FF-S19	305x305x198 UC S355	+2956	+3350
FF-S20	152x152x23 UC S355	+3198	+3350
FF-S21	152x152x23 UC S355	+3198	+3350
FF-S22	152x152x37 UC S355	+3147	+3350
FF-S23	305x305x198 UC S355	+2931	+3350
FF-S25	203x133x25 UB S355	+3100	+3200
FF-S26	152x152x37 UC S355	+2997	+3200
FF-S27	152x152x37 UC S355	+2997	+3200
FF-S28	152x152x37 UC S355	+2997	+3200
FF-S29	152x152x37 UC S355	+2997	+3200
FF-S30	152x152x37 UC S355	+2997	+3200
FF-S31	152x152x37 UC S355	+2997	+3200
FF-S33	305x305x198 UC S355	+2781	+3200
FF-S34	152x152x37 UC S355	+2997	+3200
FF-S35	254x254x73 UC S355	+2997	+3200
FF-S36	254x254x73 UC S355	+2997	+3200
FF-S37	152x152x37 UC S355	+2997	+3200
FF-S38	152x152x37 UC S355	+2997	+3200
FF-S39	152x152x37 UC S355	+2997	+3200
FF-S40	254x254x73 UC S355	+2946	+3200
FF-S41	254x254x73 UC S355	+2946	+3200
FF-S42	152x152x23 UC S355	+2848	+3000
FF-S43	152x152x23 UC S355	+2848	+3000
FF-S44	152x152x23 UC S355	+2848	+3000
FF-S45	152x152x23 UC S355	+2848	+3000
FF-S46	152x152x23 UC S355	+2848	+3000
FF-S47	152x152x23 UC S355	+2848	+3000
FF-S52	203x133x25 UB S355	+3100	+3200
RF-S16	305x305x198 UC S355	+3458	+6479
RF-S17	305x305x198 UC S355	+3458	+6479
RF-S25	305x305x198 UC S355	+3451	+6479
RF-S26	305x305x198 UC S355	+3458	+6479
RF-S31	305x305x198 UC S355	+3451	+6479
RF-S32	305x305x198 UC S355	+3451	+6479
RF-S33	305x305x198 UC S355	+3451	+6479
RF-S38	203x133x25 UB S355	+6393	+6596
SF-S02	254x254x73 UC S355	+6212	+6479
FF-P01	203x133x25 UB S355	+3350	+5923
FF-P02	203x133x25 UB S355	+3350	+5923
FF-P03	203x133x25 UB S355	+3350	+5923
FF-P04	203x133x25 UB S355	+3350	+5923
GF-P01	203x133x25 UB S355	-100	+2848
GF-P02	203x133x25 UB S355	-100	+2848
GF-P03	203x133x25 UB S355	-100	+2848
GF-P04	203x133x25 UB S355	-100	+2848
GF-P05	152x152x23 UC S355	-100	+2849
GF-P06	152x152x23 UC S355	-100	+2849
GF-P07	152x152x23 UC S355	-100	+2849

BOS / TOS = bottom / top of steel above GF FFL (C-1 columns: base / top).

NOTES

1. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
2. Lintel (L-n) and steel (B-n, C-1) marks from Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -, which takes precedence.
3. Masonry walls shown for context.
4. Steel over dashed. BOS / TOS = bottom / top of steel above GF FFL.
5. Steel over the ICF at this level, dashed, with the engineer's member marks as modelled; BOS / TOS = bottom / top of steel above GF FFL. Columns cut at the plan level shown solid.
6. Walls and openings: see UKPCS-003-GA-01 for the ICF setting out, opening sizes and the opening schedule.
7. No structural grid is registered on this issue.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments

Nudura™ BuildEase

CLIENT	PROJECT
ICF Homes	Dendrons


DRAWING TITLE
GF STEEL OVER ICF

Steel over the ICF, marked and scheduled

SCALE	SIZE	DATE
1:100	A2	15.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-GS-01	P02

FOR APPROVAL - NOT FOR CONSTRUCTION

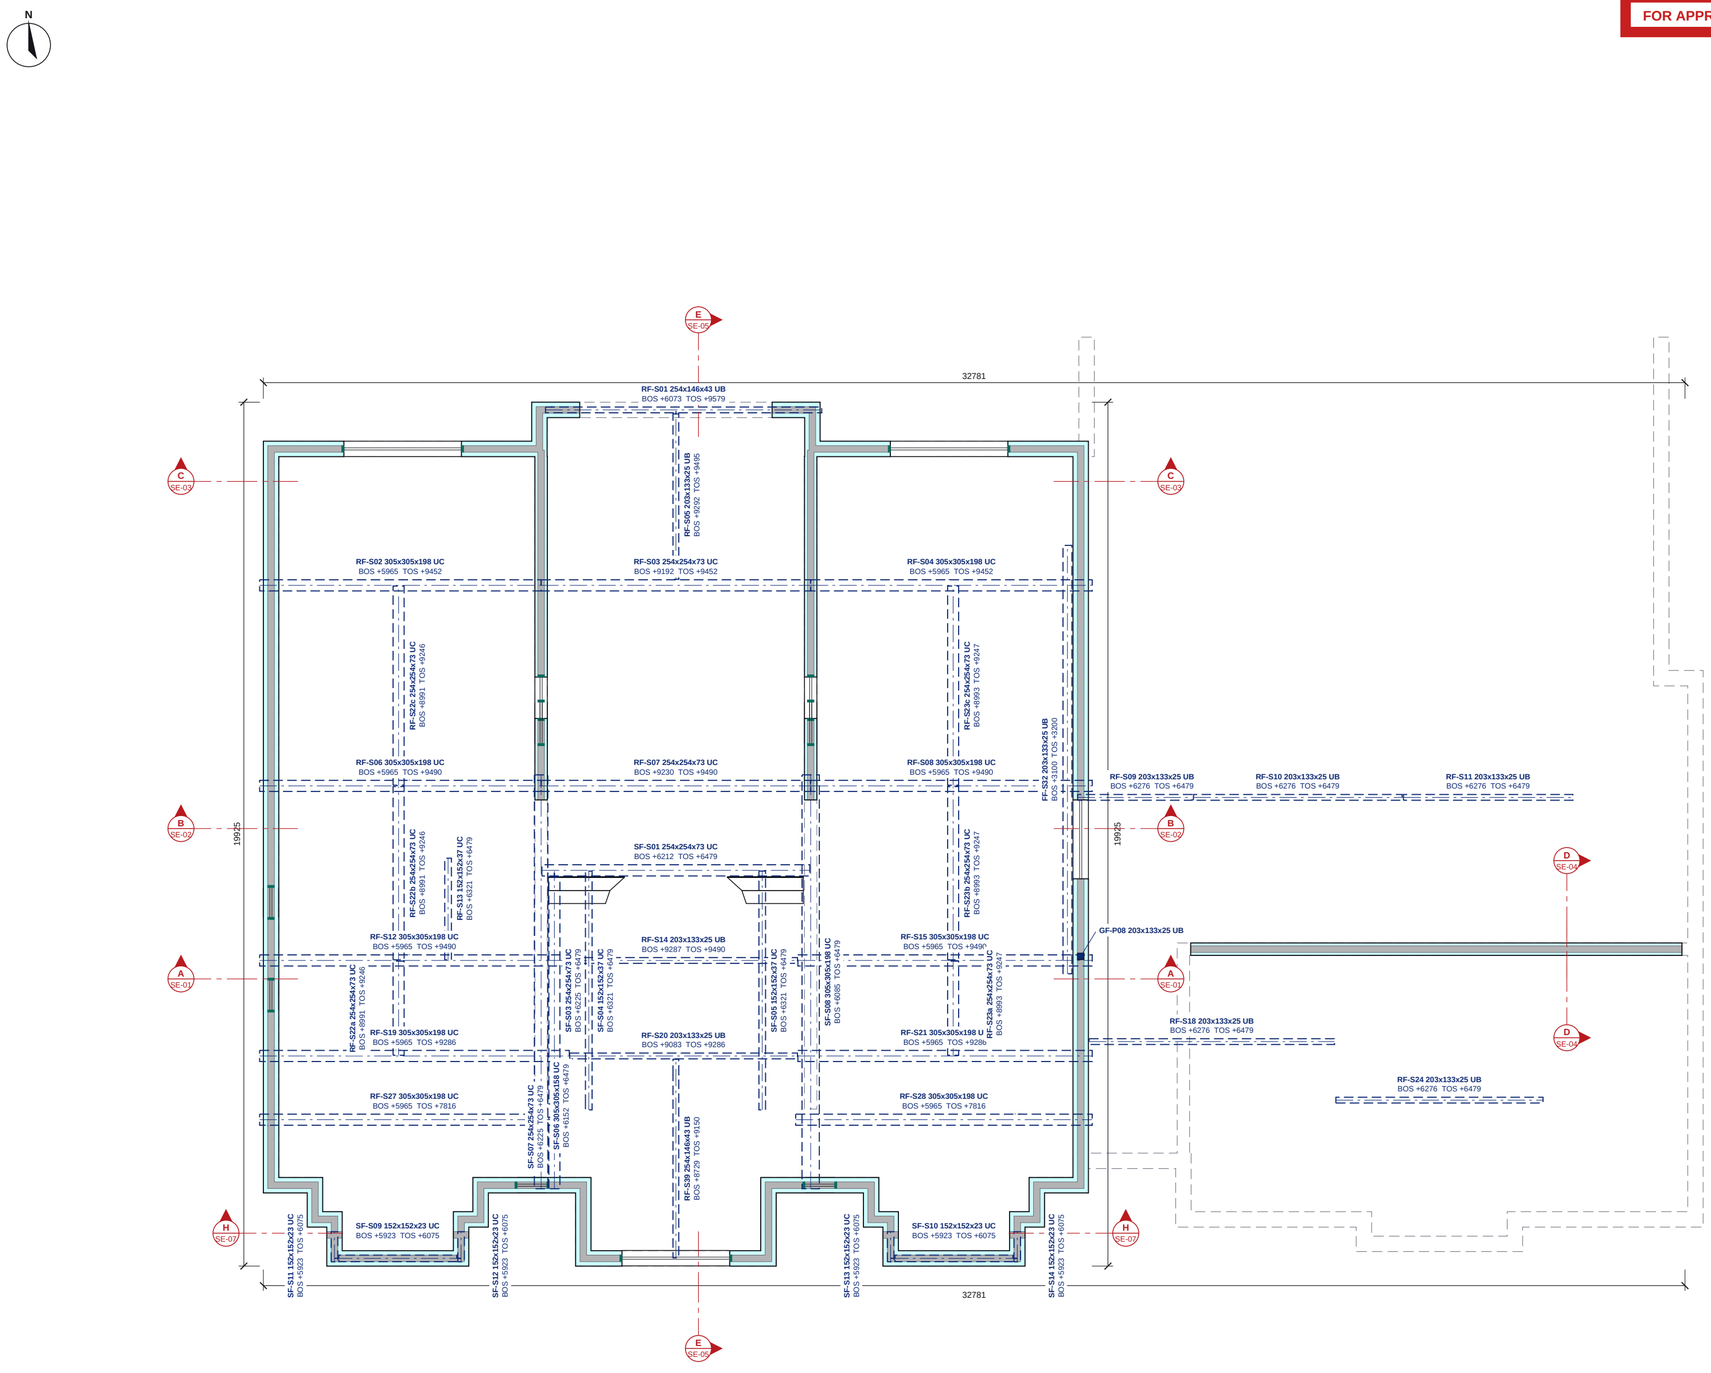

ICF wall at the plan cut (see the ICF sheet)
ICF walls of the level below (dashed)
Steel over (dashed), marked
Steel column cut
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Section line (see SE sheet)

FF STEEL OVER ICF

Scale 1:100 @ A2 | Plan cut at +4100

0 1 2 3 4 5m

FF STEEL SCHEDULE

STEEL SCHEDULE

Mark	Section (engineer)	BOS	TOS
FF-S32	203x133x25 UB S355	+3100	+3200
RF-S01	254x146x43 UB S355	+6073	+9579
RF-S02	305x305x198 UC S355	+5965	+9452
RF-S03	254x254x73 UC S355	+9192	+9452
RF-S04	305x305x198 UC S355	+5965	+9452
RF-S05	203x133x25 UB S355	+9292	+9495
RF-S06	305x305x198 UC S355	+5965	+9490
RF-S07	254x254x73 UC S355	+9230	+9490
RF-S08	305x305x198 UC S355	+5965	+9490
RF-S09	203x133x25 UB S355	+6276	+6479
RF-S10	203x133x25 UB S355	+6276	+6479
RF-S11	203x133x25 UB S355	+6276	+6479
RF-S12	305x305x198 UC S355	+5965	+9490
RF-S13	152x152x37 UC S355	+6321	+6479
RF-S14	203x133x25 UB S355	+9287	+9490
RF-S15	305x305x198 UC S355	+5965	+9490
RF-S18	203x133x25 UB S355	+6276	+6479
RF-S19	305x305x198 UC S355	+5965	+9286
RF-S20	203x133x25 UB S355	+9083	+9286
RF-S21	305x305x198 UC S355	+5965	+9286
RF-S22a	254x254x73 UC S355	+8991	+9246
RF-S22b	254x254x73 UC S355	+8991	+9246
RF-S22c	254x254x73 UC S355	+8991	+9246
RF-S23a	254x254x73 UC S355	+8993	+9247
RF-S23b	254x254x73 UC S355	+8993	+9247
RF-S23c	254x254x73 UC S355	+8993	+9247
RF-S24	203x133x25 UB S355	+6276	+6479
RF-S27	305x305x198 UC S355	+5965	+7816
RF-S28	305x305x198 UC S355	+5965	+7816
RF-S39	254x146x43 UB S355	+8729	+9150
SF-S01	254x254x73 UC S355	+6212	+6479
SF-S03	254x254x73 UC S355	+6225	+6479
SF-S04	152x152x37 UC S355	+6321	+6479
SF-S05	152x152x37 UC S355	+6321	+6479
SF-S06	305x305x158 UC S355	+6152	+6479
SF-S07	254x254x73 UC S355	+6225	+6479
SF-S08	305x305x198 UC S355	+6085	+6479
SF-S09	152x152x23 UC S355	+5923	+6075
SF-S10	152x152x23 UC S355	+5923	+6075
SF-S11	152x152x23 UC S355	+5923	+6075
SF-S12	152x152x23 UC S355	+5923	+6075
SF-S13	152x152x23 UC S355	+5923	+6075
SF-S14	152x152x23 UC S355	+5923	+6075
GF-P08	203x133x25 UB S355	-100	+2781

BOS / TOS = bottom / top of steel above GF FFL (C-1 columns: base / top).

NOTES

1. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
2. Lintel (L-n) and steel (B-n, C-1) marks from Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -, which takes precedence.
3. Masonry walls shown for context.
4. Steel over dashed. BOS / TOS = bottom / top of steel above GF FFL.
5. Steel over the ICF at this level, dashed, with the engineer's member marks as modelled; BOS / TOS = bottom / top of steel above GF FFL. Columns cut at the plan level shown solid.
6. Walls and openings: see UKPCS-003-GA-02 for the ICF setting out, opening sizes and the opening schedule.
7. No structural grid is registered on this issue.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments

Nudura™ BuildEase

CLIENT	PROJECT
ICF Homes	Dendrons


DRAWING TITLE
FF STEEL OVER ICF
Steel over the ICF, marked and scheduled

SCALE	SIZE	DATE
1:100	A2	15.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-GS-02	P02


Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

FOR APPROVAL - NOT FOR CONSTRUCTION

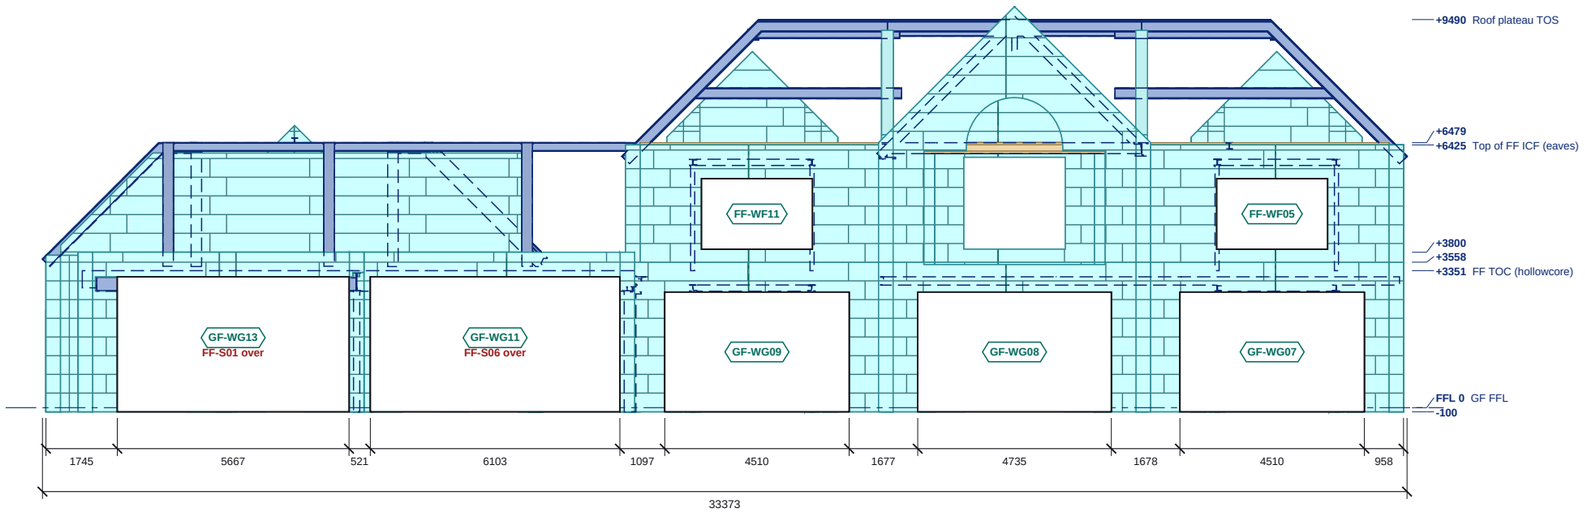

NORTH ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL (AOD in the schedule); sills and heads in the schedule

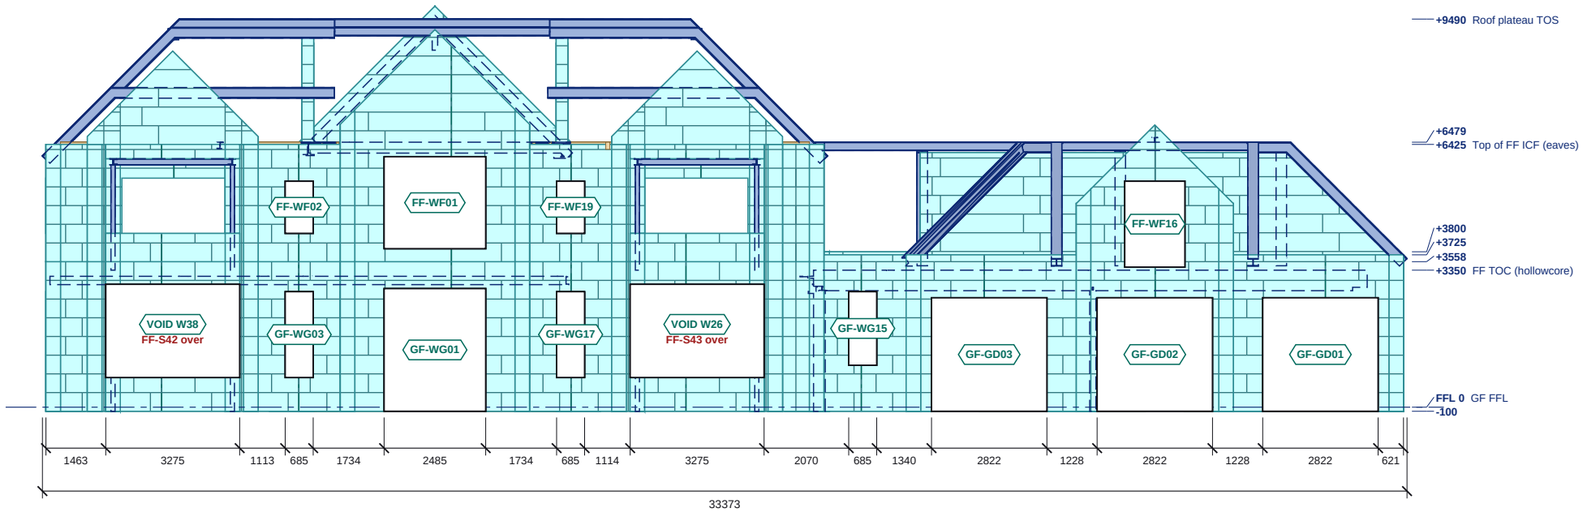

SOUTH ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL (AOD in the schedule); sills and heads in the schedule

0 1 2 3 4 5 6 7 8m

ICF external EPS face
Block course joint
Stack joint
Steel

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

ELEVATION SCHEDULES

NORTH ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
FF-WF05	2710	1725	+3875	+5600	-
FF-WF11	2710	1725	+3875	+5600	-
GF-WG07	4510	2925	-100	+2825	-
GF-WG08	4735	2925	-100	+2825	-
GF-WG09	4510	2925	-100	+2825	-
GF-WG11	6103	3300	-100	+3200	FF-S06 over
GF-WG13	5667	3300	-100	+3200	FF-S01 over

Structural openings in the ICF; sill and head above GF FFL.

SOUTH ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
FF-WF01	2485	2250	+3875	+6125	-
FF-WF02	685	1275	+4250	+5525	-
FF-WF16	1472	2100	+3425	+5525	-
FF-WF19	685	1275	+4250	+5525	-
GF-GD01	2822	2775	-100	+2675	-
GF-GD02	2822	2775	-100	+2675	-
GF-GD03	2822	2775	-100	+2675	-
GF-WG01	2485	3000	-100	+2900	-
GF-WG03	685	2100	+725	+2825	-
GF-WG15	685	1800	+1025	+2825	-
GF-WG17	685	2100	+725	+2825	-
VOID Corner 25	356	2280	+725	+3005	-
VOID Corner 26	356	2280	+725	+3005	-
VOID Corner 37	356	2280	+725	+3005	-
VOID Corner 38	356	2280	+725	+3005	-
VOID W26	2563	2280	+725	+3005	FF-S43 over
VOID W38	2563	2280	+725	+3005	FF-S42 over

Structural openings in the ICF; sill and head above GF FFL.

LEVELS ON THESE ELEVATIONS

Level	FFL	AOD
underside of ICF	-100	168.648
GF FFL	0	168.748
FF TOC (hollowcore)	+3350	172.098
FF TOC (hollowcore)	+3351	172.099
top of ICF	+3558	172.306
top of ICF	+3725	172.473
top of ICF	+3800	172.548
Top of FF ICF (eaves)	+6425	175.173
top of roof build-up	+6479	175.227
Roof plateau TOS	+9490	178.238

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL (168.748 AOD). Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. Steel shown as modelled.
4. See UKPCS-003-GA-01 for plan setting out, lintels and steel.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments

Nudura™ BuildEase

CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE


NORTH AND SOUTH ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:150	A3	15.10.26
DRAWN	CHECKED	APPROVED
TS		


STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-EL-01	P02

FOR APPROVAL - NOT FOR CONSTRUCTION

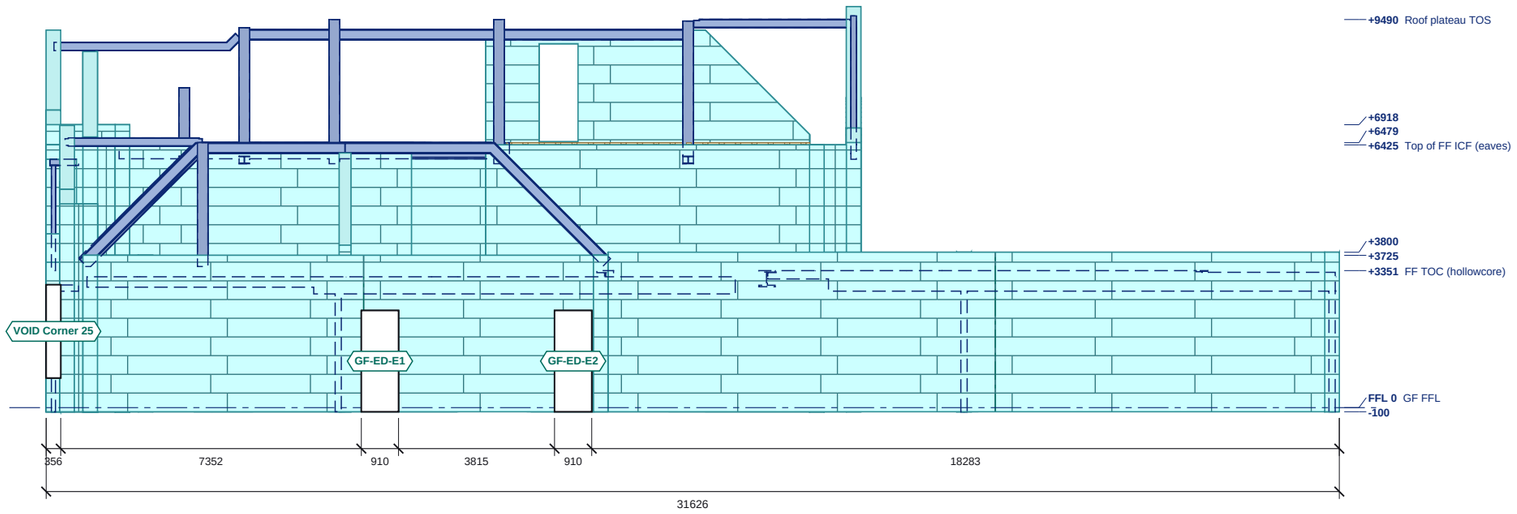

EAST ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL (AOD in the schedule); sills and heads in the schedule

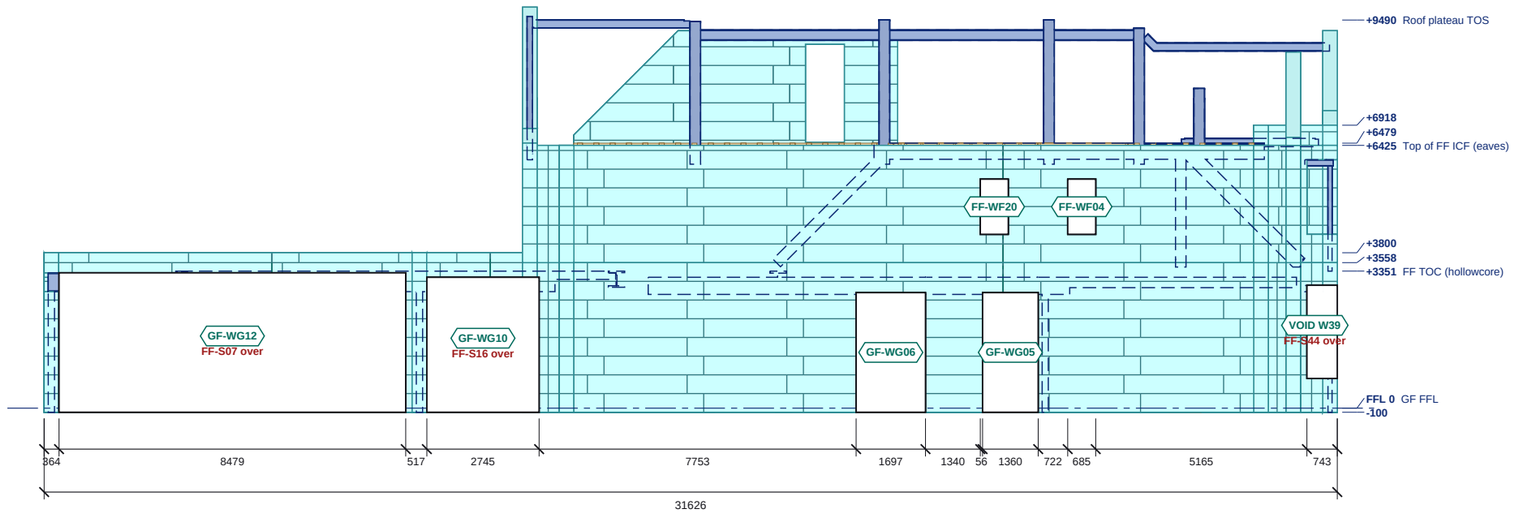

WEST ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL (AOD in the schedule); sills and heads in the schedule

0 1 2 3 4 5 6 7 8m

ICF external EPS face
Block course joint
Stack joint
Steel

Do not scale. All dimensions in millimetres; levels in metres from GF FFL. Check all dimensions on site.

ELEVATION SCHEDULES

EAST ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
GF-ED-E1	910	2475	-100	+2375	-
GF-ED-E2	910	2475	-100	+2375	-
VOID Corner 25	356	2280	+725	+3005	-

Structural openings in the ICF; sill and head above GF FFL.

WEST ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
FF-WF04	685	1350	+4250	+5600	-
FF-WF20	685	1350	+4250	+5600	-
GF-WG05	1360	2925	-100	+2825	-
GF-WG06	1697	2925	-100	+2825	-
GF-WG10	2745	3300	-100	+3200	FF-S16 over
GF-WG12	8479	3409	-100	+3309	FF-S07 over
VOID Corner 38	356	2280	+725	+3005	-
VOID W39	387	2280	+725	+3005	FF-S44 over

Structural openings in the ICF; sill and head above GF FFL.

EAST ELEVATION: LEVELS

Level	FFL	AOD
underside of ICF	-100	168.648
GF FFL	0	168.748
FF TOC (hollowcore)	+3351	172.099
top of ICF	+3725	172.473
top of ICF	+3800	172.548
Top of FF ICF (eaves)	+6425	175.173
top of roof build-up	+6479	175.227
top of ICF	+6918	175.666
Roof plateau TOS	+9490	178.238

WEST ELEVATION: LEVELS

Level	FFL	AOD
underside of ICF	-100	168.648
GF FFL	0	168.748
FF TOC (hollowcore)	+3351	172.099
top of ICF	+3558	172.306
top of ICF	+3800	172.548
Top of FF ICF (eaves)	+6425	175.173
top of roof build-up	+6479	175.227
top of ICF	+6918	175.666
Roof plateau TOS	+9490	178.238

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL (168.748 AOD). Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. Steel shown as modelled.
4. See UKPCS-003-GA-01 for plan setting out, lintels and steel.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments

Nudura™ BuildEase

CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE


EAST AND WEST ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:150	A3	15.10.26
DRAWN	CHECKED	APPROVED
TS		


STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-EL-02	P02

FOR APPROVAL - NOT FOR CONSTRUCTION

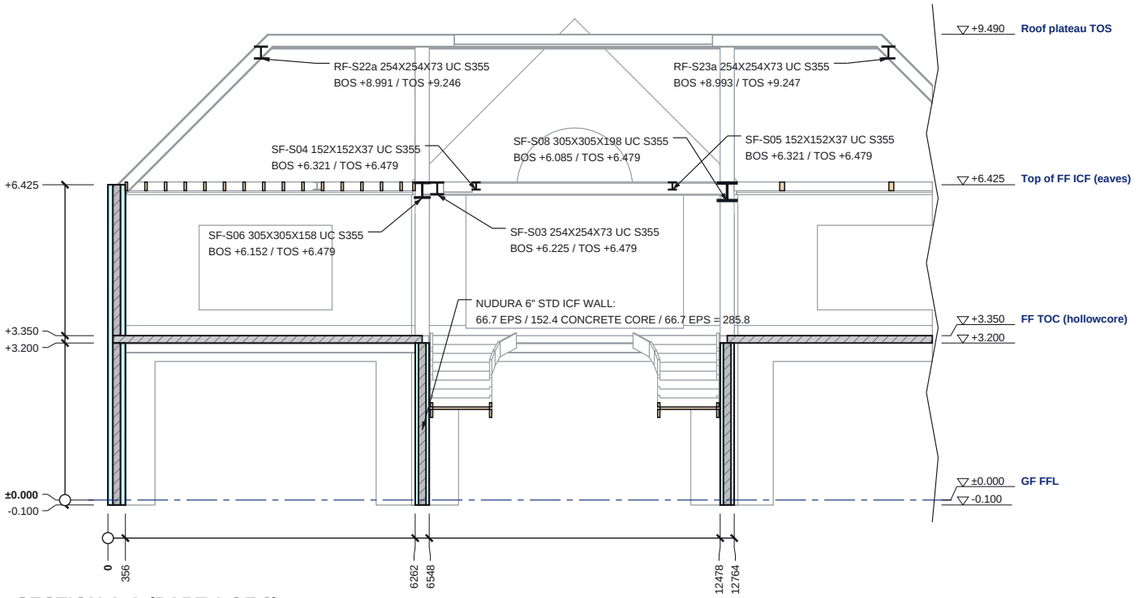

SECTION A-A (PART 1 OF 2)

Scale 1:125 @ A3 | Looking north; levels above GF FFL

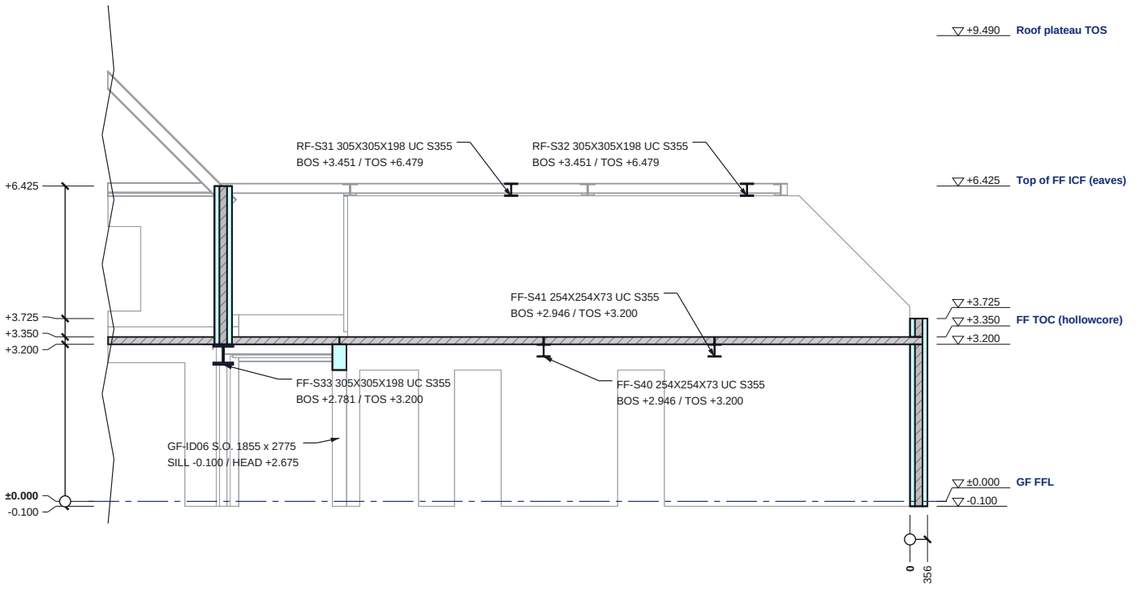

SECTION A-A (PART 2 OF 2)

Scale 1:125 @ A3 | Looking north; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Beyond the cut (line work)

0 1 2 3 4 5m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

SECTION A-A SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-0.100	168.648
GF FFL	±0.000	168.748
top of ICF W43	+3.200	171.948
FF TOC (hollowcore)	+3.350	172.098
top of ICF W13	+3.725	172.473
Top of FF ICF (eaves)	+6.425	175.173
Roof plateau TOS	+9.490	178.238

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S33	305x305x198 UC S355	+2.781	+3.200
FF-S40	254x254x73 UC S355	+2.946	+3.200
FF-S41	254x254x73 UC S355	+2.946	+3.200
RF-S31	305x305x198 UC S355	+3.451	+6.479
RF-S32	305x305x198 UC S355	+3.451	+6.479
RF-S22a	254x254x73 UC S355	+8.991	+9.246
RF-S23a	254x254x73 UC S355	+8.993	+9.247
SF-S03	254x254x73 UC S355	+6.225	+6.479
SF-S04	152x152x37 UC S355	+6.321	+6.479
SF-S05	152x152x37 UC S355	+6.321	+6.479
SF-S06	305x305x158 UC S355	+6.152	+6.479
SF-S08	305x305x198 UC S355	+6.085	+6.479

SECTION KEY

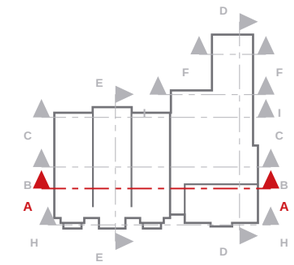

NOTES

1. Section A-A is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL (168.748 AOD); the level table gives AOD.
3. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
4. Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02 in the approval drawings pack.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments

Nudura™ BuildEase

CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE


SECTION A-A

ICF section with levels and build-ups

SCALE	SIZE	DATE
1:125	A3	15.10.26
DRAWN	CHECKED	APPROVED
TS		


STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-SE-01	P02

FOR APPROVAL - NOT FOR CONSTRUCTION

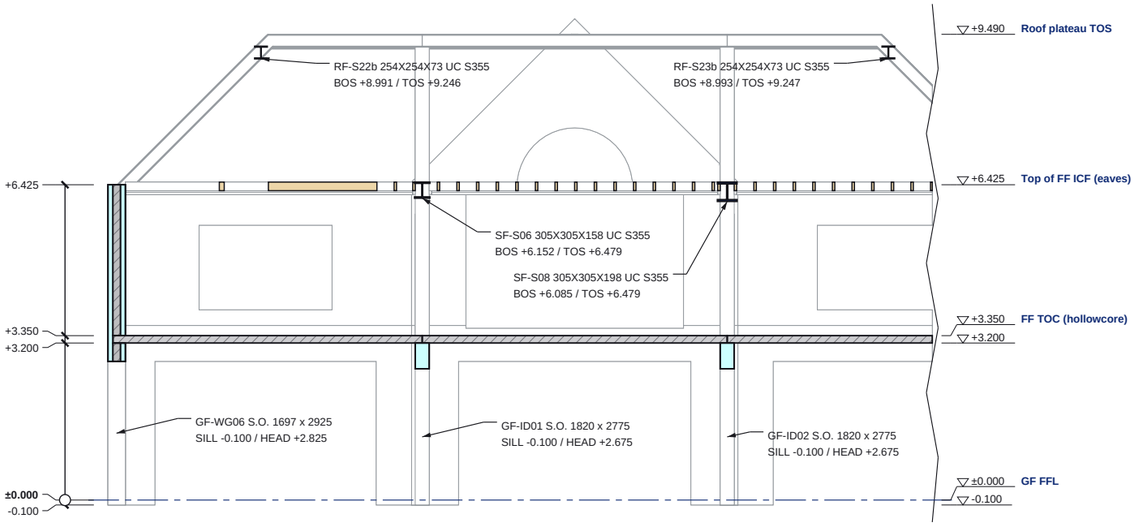

SECTION B-B (PART 1 OF 2)

Scale 1:125 @ A3 | Looking north; levels above GF FFL

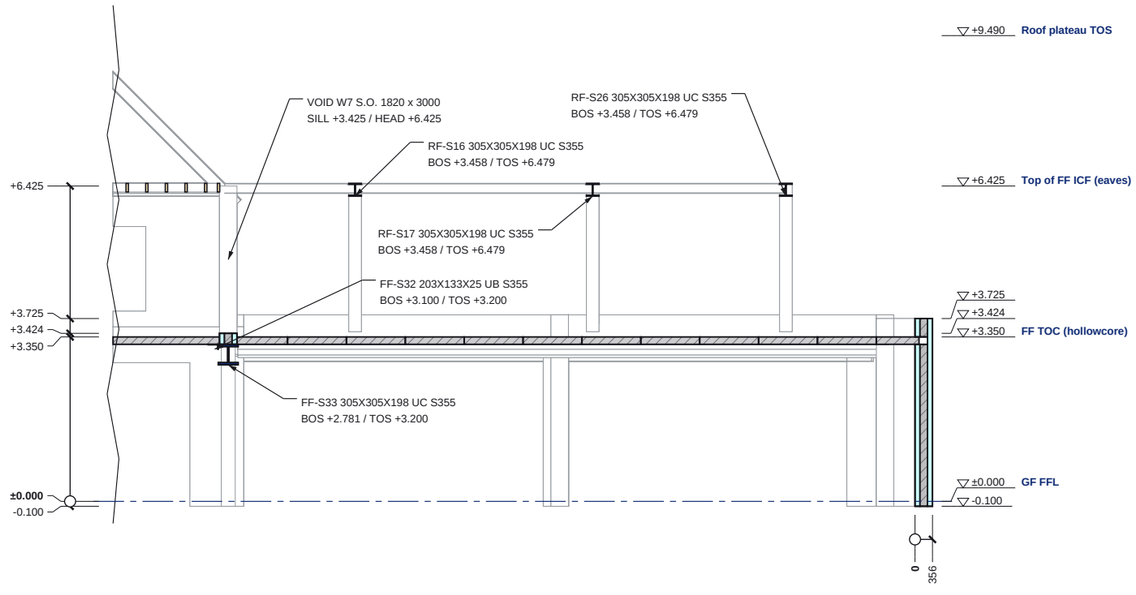

SECTION B-B (PART 2 OF 2)

Scale 1:125 @ A3 | Looking north; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Beyond the cut (line work)

0 1 2 3 4 5m

Do not scale. All dimensions in millimetres; levels in metres from GF FFL. Check all dimensions on site.

SECTION B-B SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-0.100	168.648
GF FFL	±0.000	168.748
top of ICF W43	+3.200	171.948
FF TOC (hollowcore)	+3.350	172.098
top of ICF W07	+3.424	172.172
top of ICF W13	+3.725	172.473
Top of FF ICF (eaves)	+6.425	175.173
Roof plateau TOS	+9.490	178.238

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S32	203x133x25 UB S355	+3.100	+3.200
FF-S33	305x305x198 UC S355	+2.781	+3.200
RF-S16	305x305x198 UC S355	+3.458	+6.479
RF-S17	305x305x198 UC S355	+3.458	+6.479
RF-S26	305x305x198 UC S355	+3.458	+6.479
RF-S22b	254x254x73 UC S355	+8.991	+9.246
RF-S23b	254x254x73 UC S355	+8.993	+9.247
SF-S06	305x305x158 UC S355	+6.152	+6.479
SF-S08	305x305x198 UC S355	+6.085	+6.479

SECTION KEY

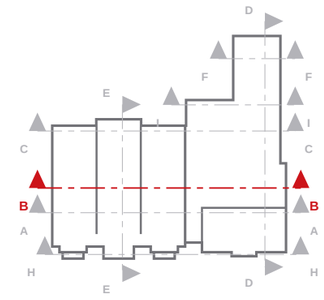

NOTES

1. Section B-B is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL (168.748 AOD); the level table gives AOD.
3. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
4. Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02 in the approval drawings pack.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments

Nudura™ BuildEase


CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE
SECTION B-B
ICF section with levels and build-ups

SCALE	SIZE	DATE
1:125	A3	15.10.26
DRAWN	CHECKED	APPROVED
TS		


STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-SE-02	P02

FOR APPROVAL - NOT FOR CONSTRUCTION

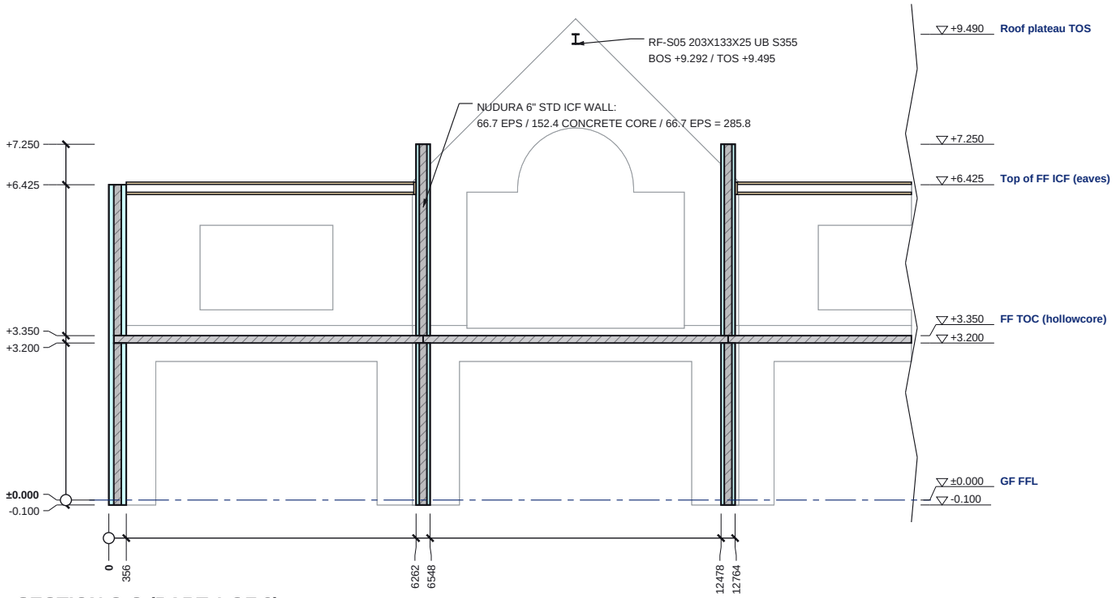

SECTION C-C (PART 1 OF 2)

Scale 1:125 @ A3 | Looking north; levels above GF FFL

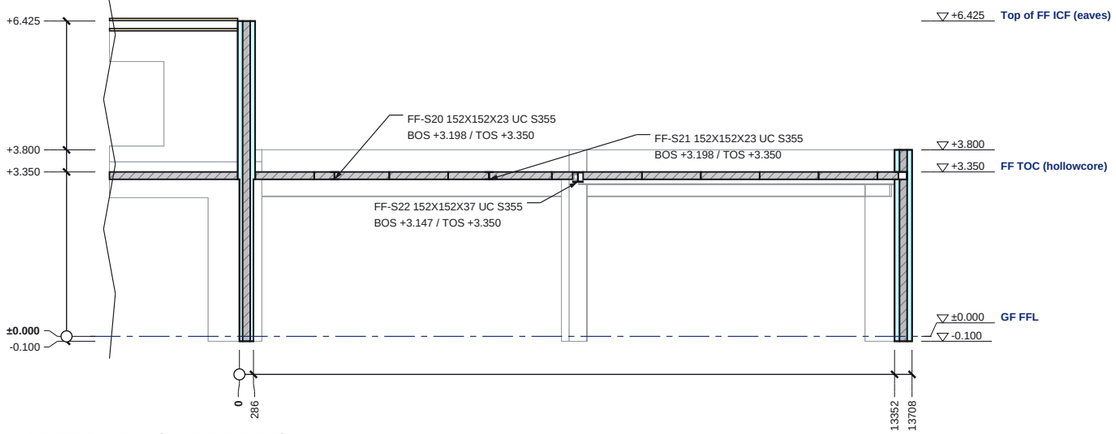

SECTION C-C (PART 2 OF 2)

Scale 1:125 @ A3 | Looking north; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Beyond the cut (line work)

0 1 2 3 4 5m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

SECTION C-C SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-0.100	168.648
GF FFL	±0.000	168.748
top of ICF W29	+3.200	171.948
FF TOC (hollowcore)	+3.350	172.098
top of ICF W11	+3.800	172.548
Top of FF ICF (eaves)	+6.425	175.173
top of ICF W29	+7.250	175.998
Roof plateau TOS	+9.490	178.238

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S20	152x152x23 UC S355	+3.198	+3.350
FF-S21	152x152x23 UC S355	+3.198	+3.350
FF-S22	152x152x37 UC S355	+3.147	+3.350
RF-S05	203x133x25 UB S355	+9.292	+9.495

SECTION KEY

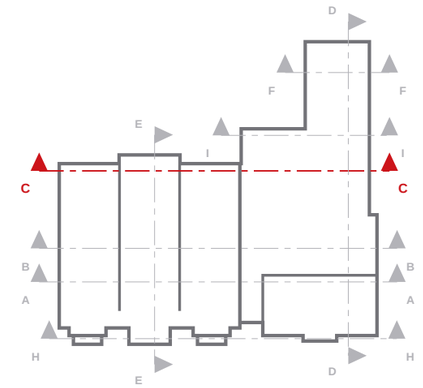

NOTES

1. Section C-C is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL (168.748 AOD); the level table gives AOD.
3. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
4. Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02 in the approval drawings pack.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments

Nudura™ BuildEase

CLIENT	PROJECT
ICF Homes	Dendrons


DRAWING TITLE
SECTION C-C

ICF section with levels and build-ups

SCALE	SIZE	DATE
1:125	A3	15.10.26
DRAWN	CHECKED	APPROVED
TS		


STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-SE-03	P02

FOR APPROVAL - NOT FOR CONSTRUCTION

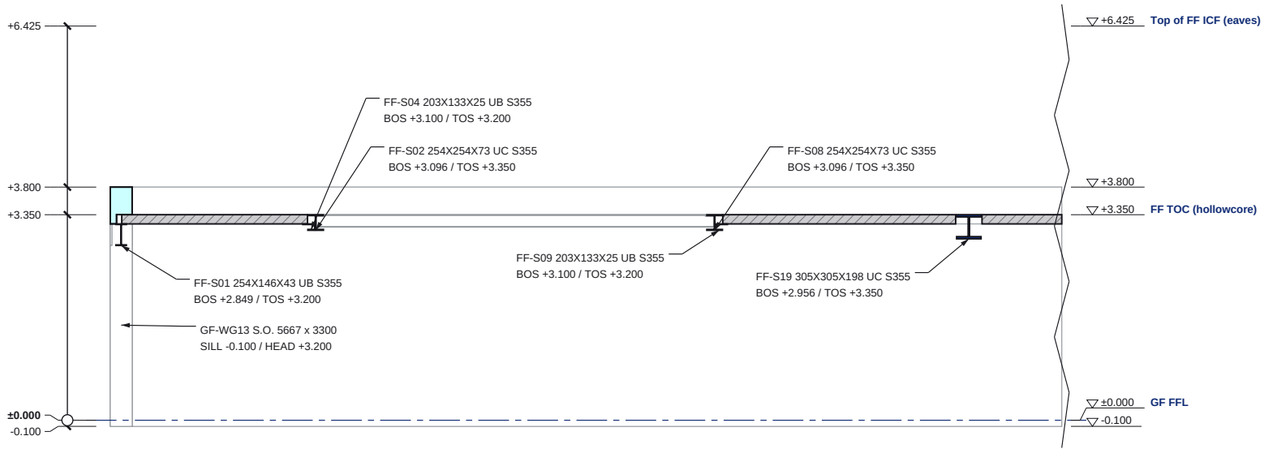

SECTION D-D (PART 1 OF 2)

Scale 1:100 @ A3 | Looking east; levels above GF FFL

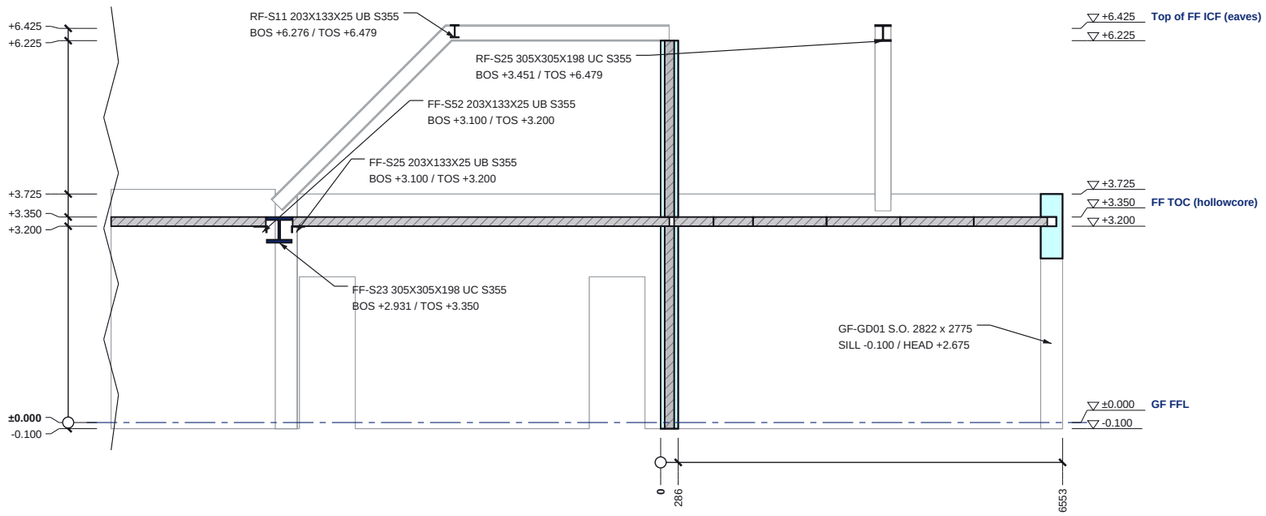

SECTION D-D (PART 2 OF 2)

Scale 1:100 @ A3 | Looking east; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Beyond the cut (line work)

0 1 2 3 4 5m

SECTION D-D SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-0.100	168.648
GF FFL	±0.000	168.748
top of ICF W31	+3.200	171.948
FF TOC (hollowcore)	+3.350	172.098
top of ICF W14	+3.725	172.473
top of ICF W10	+3.800	172.548
top of ICF W31	+6.225	174.973
Top of FF ICF (eaves)	+6.425	175.173

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S01	254x146x43 UB S355	+2.849	+3.200
FF-S02	254x254x73 UC S355	+3.096	+3.350
FF-S04	203x133x25 UB S355	+3.100	+3.200
FF-S08	254x254x73 UC S355	+3.096	+3.350
FF-S09	203x133x25 UB S355	+3.100	+3.200
FF-S19	305x305x198 UC S355	+2.956	+3.350
FF-S23	305x305x198 UC S355	+2.931	+3.350
FF-S25	203x133x25 UB S355	+3.100	+3.200
FF-S52	203x133x25 UB S355	+3.100	+3.200
RF-S11	203x133x25 UB S355	+6.276	+6.479
RF-S25	305x305x198 UC S355	+3.451	+6.479

SECTION KEY

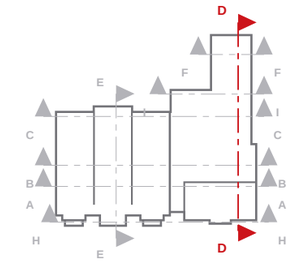

NOTES

1. Section D-D is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL (168.748 AOD); the level table gives AOD.
3. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
4. Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02 in the approval drawings pack.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments

Nudura™ BuildEase

CLIENT	PROJECT
ICF Homes	Dendrons


DRAWING TITLE
SECTION D-D
ICF section with levels and build-ups

SCALE	SIZE	DATE
1:100	A3	15.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-SE-04	P02

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

FOR APPROVAL - NOT FOR CONSTRUCTION

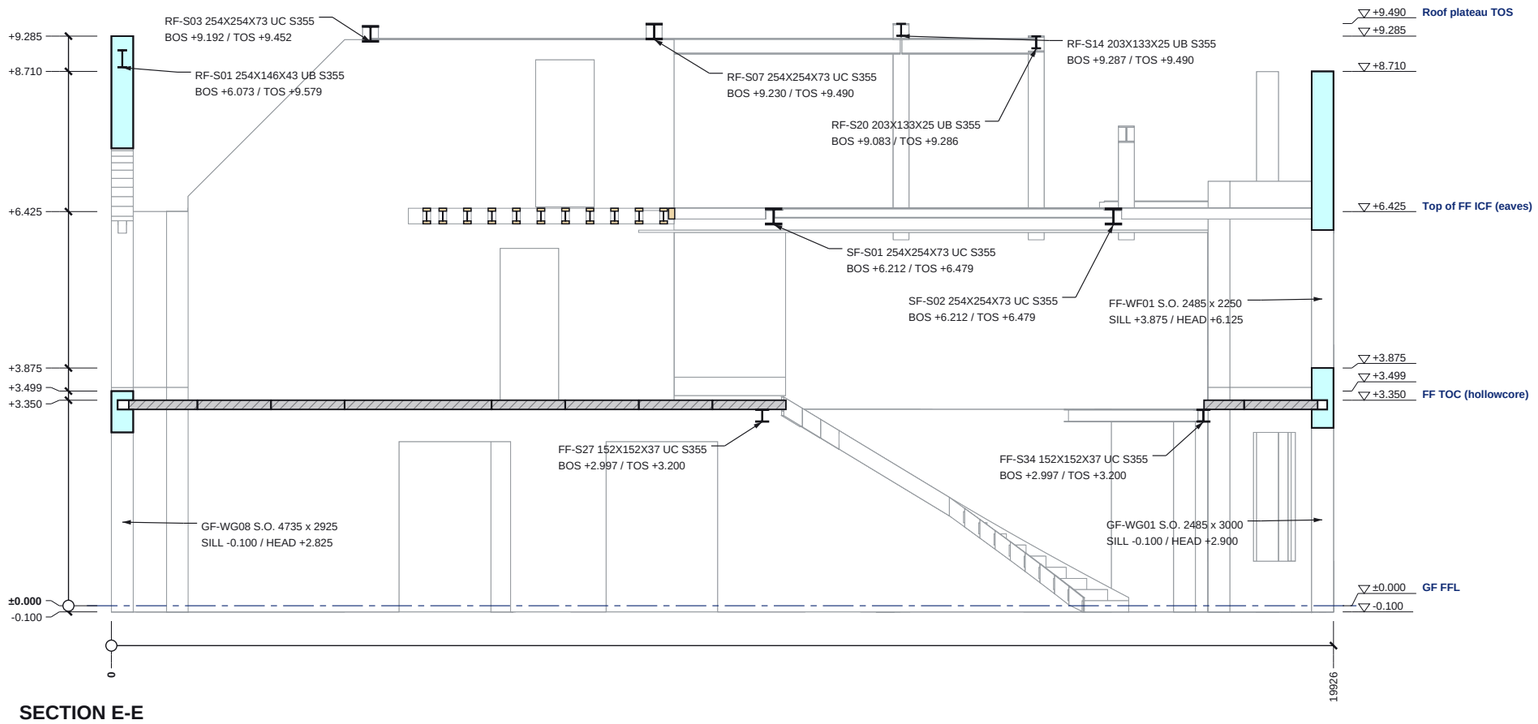

SECTION E-E

Scale 1:100 @ A3 | Looking east; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Beyond the cut (line work)

0 1 2 3 4 5m

SECTION E-E SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-0.100	168.648
GF FFL	±0.000	168.748
FF TOC (hollowcore)	+3.350	172.098
top of ICF W04	+3.499	172.247
top of ICF W32	+3.875	172.623
Top of FF ICF (eaves)	+6.425	175.173
top of ICF W32	+8.710	177.458
top of ICF W04	+9.285	178.033
Roof plateau TOS	+9.490	178.238

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S27	152x152x37 UC S355	+2.997	+3.200
FF-S34	152x152x37 UC S355	+2.997	+3.200
RF-S01	254x146x43 UB S355	+6.073	+9.579
RF-S03	254x254x73 UC S355	+9.192	+9.452
RF-S07	254x254x73 UC S355	+9.230	+9.490
RF-S14	203x133x25 UB S355	+9.287	+9.490
RF-S20	203x133x25 UB S355	+9.083	+9.286
SF-S01	254x254x73 UC S355	+6.212	+6.479
SF-S02	254x254x73 UC S355	+6.212	+6.479

SECTION KEY

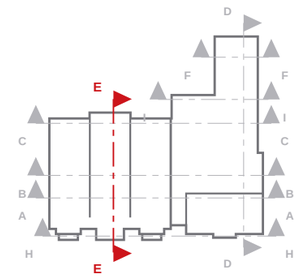

NOTES

1. Section E-E is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL (168.748 AOD); the level table gives AOD.
3. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
4. Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02 in the approval drawings pack.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments

Nudura™ BuildEase

CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE
SECTION E-E


ICF section with levels and build-ups

SCALE	SIZE	DATE
1:100	A3	15.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-SE-05	P02

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

FOR APPROVAL - NOT FOR CONSTRUCTION

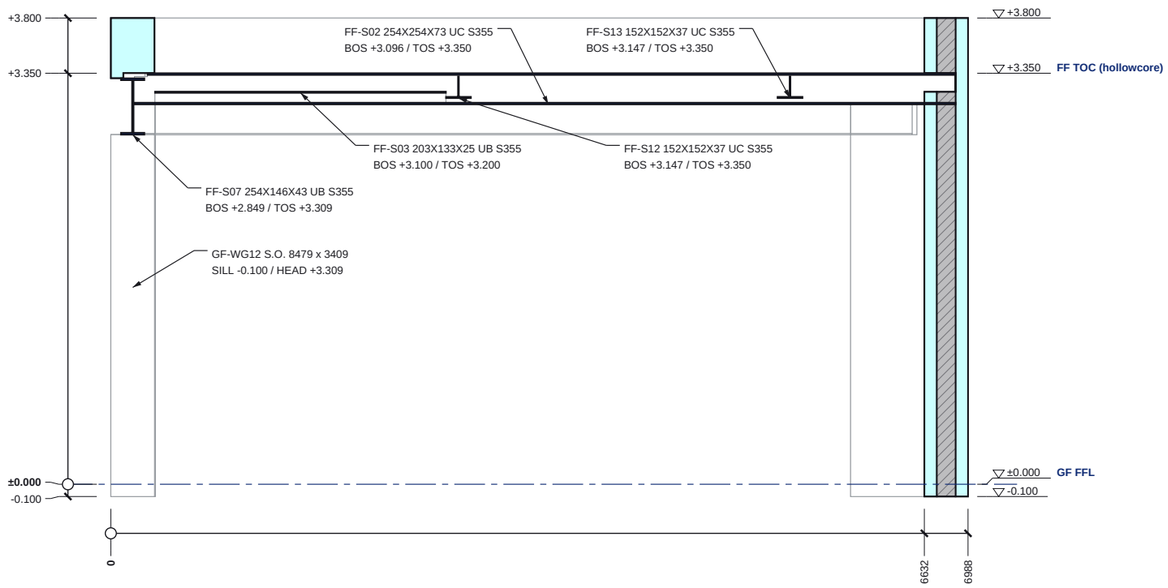

SECTION F-F

Scale 1:50 @ A3 | Looking north; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Beyond the cut (line work)

0 1 2m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

SECTION F-F SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-0.100	168.648
GF FFL	±0.000	168.748
FF TOC (hollowcore)	+3.350	172.098
top of ICF W11	+3.800	172.548

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S02	254x254x73 UC S355	+3.096	+3.350
FF-S03	203x133x25 UB S355	+3.100	+3.200
FF-S07	254x146x43 UB S355	+2.849	+3.309
FF-S12	152x152x37 UC S355	+3.147	+3.350
FF-S13	152x152x37 UC S355	+3.147	+3.350

SECTION KEY

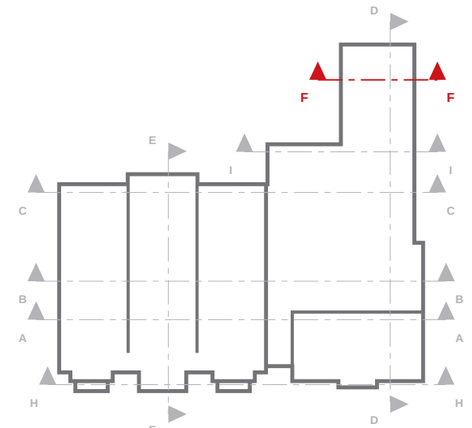

NOTES

1. Section F-F is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL (168.748 AOD); the level table gives AOD.
3. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
4. Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02 in the approval drawings pack.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments

Nudura™ BuildEase

CLIENT	PROJECT
ICF Homes	Dendrons


DRAWING TITLE
SECTION F-F

ICF section with levels and build-ups

SCALE	SIZE	DATE
1:50	A3	15.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-SE-06	P02

FOR APPROVAL - NOT FOR CONSTRUCTION

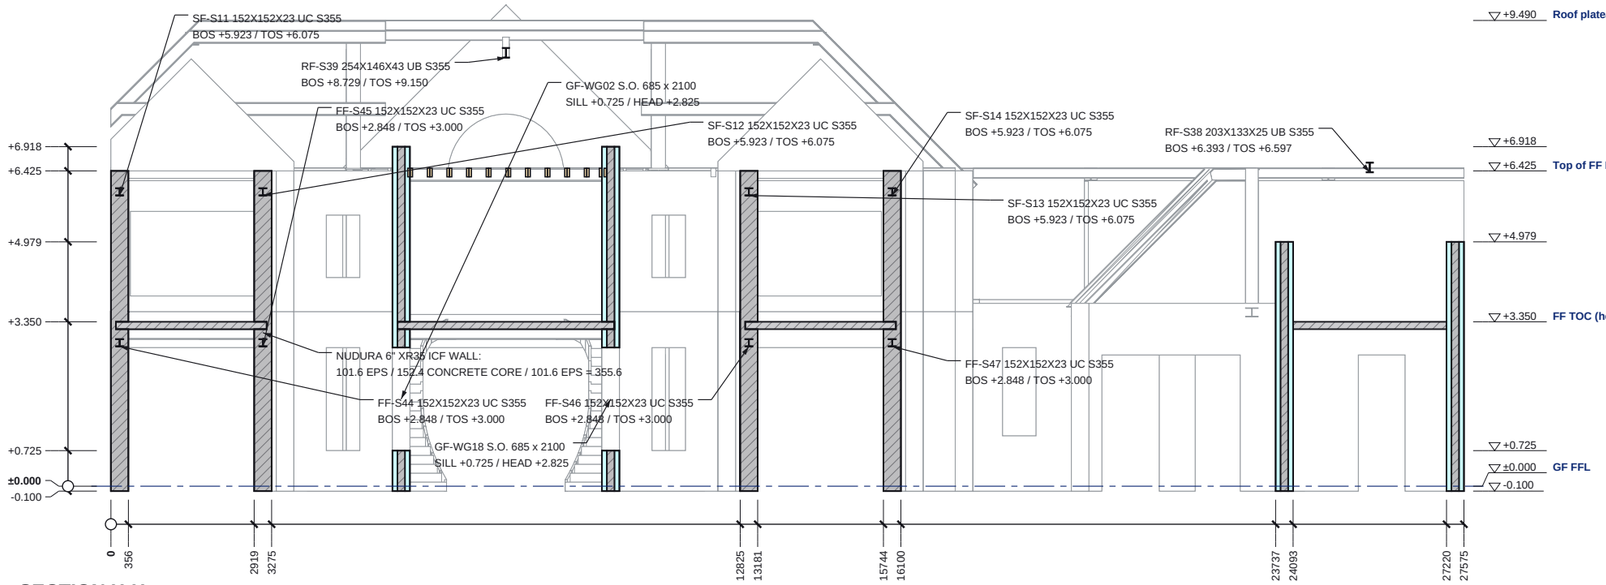

SECTION H-H

Scale 1:125 @ A3 | Looking north; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Beyond the cut (line work)

0 1 2 3 4 5m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

SECTION H-H SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-0.100	168.648
GF FFL	±0.000	168.748
top of ICF W33	+0.725	169.473
FF TOC (hollowcore)	+3.350	172.098
top of ICF W17	+4.979	173.727
Top of FF ICF (eaves)	+6.425	175.173
top of ICF W33	+6.918	175.666
Roof plateau TOS	+9.490	178.238

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S44	152x152x23 UC S355	+2.848	+3.000
FF-S45	152x152x23 UC S355	+2.848	+3.000
FF-S46	152x152x23 UC S355	+2.848	+3.000
FF-S47	152x152x23 UC S355	+2.848	+3.000
RF-S38	203x133x25 UB S355	+6.393	+6.597
RF-S39	254x146x43 UB S355	+8.729	+9.150
SF-S11	152x152x23 UC S355	+5.923	+6.075
SF-S12	152x152x23 UC S355	+5.923	+6.075
SF-S13	152x152x23 UC S355	+5.923	+6.075
SF-S14	152x152x23 UC S355	+5.923	+6.075

SECTION KEY

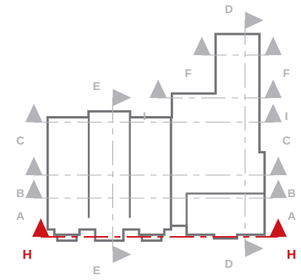

NOTES

1. Section H-H is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL (168.748 AOD); the level table gives AOD.
3. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
4. Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02 in the approval drawings pack.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments

Nudura™ BuildEase


CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE
SECTION H-H
ICF section with levels and build-ups

SCALE	SIZE	DATE
1:125	A3	15.10.26
DRAWN	CHECKED	APPROVED
TS		


STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-SE-07	P02

FOR APPROVAL - NOT FOR CONSTRUCTION

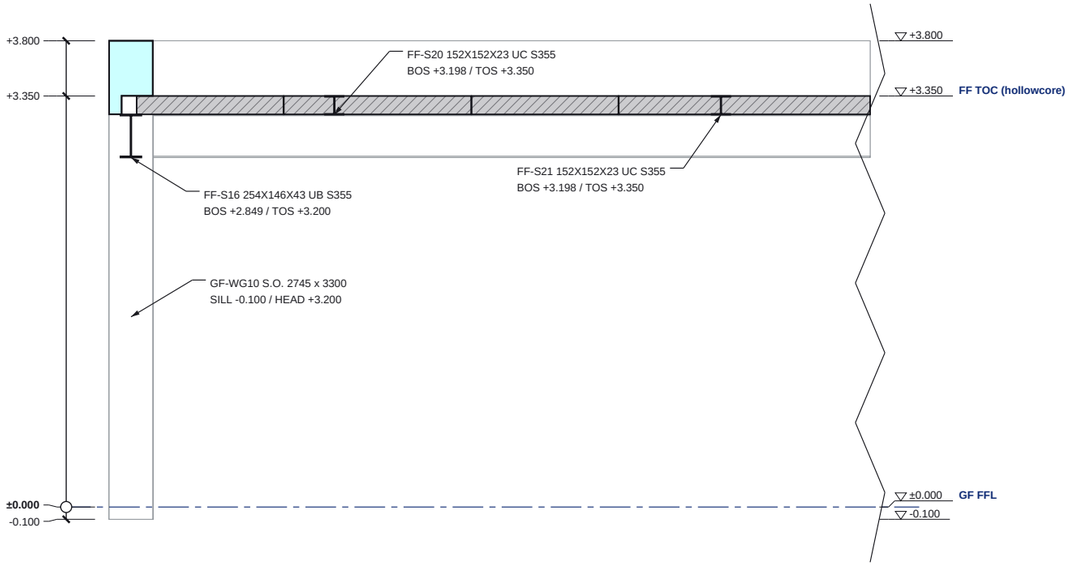

SECTION I-I (PART 1 OF 2)

Scale 1:50 @ A3 | Looking north; levels above GF FFL

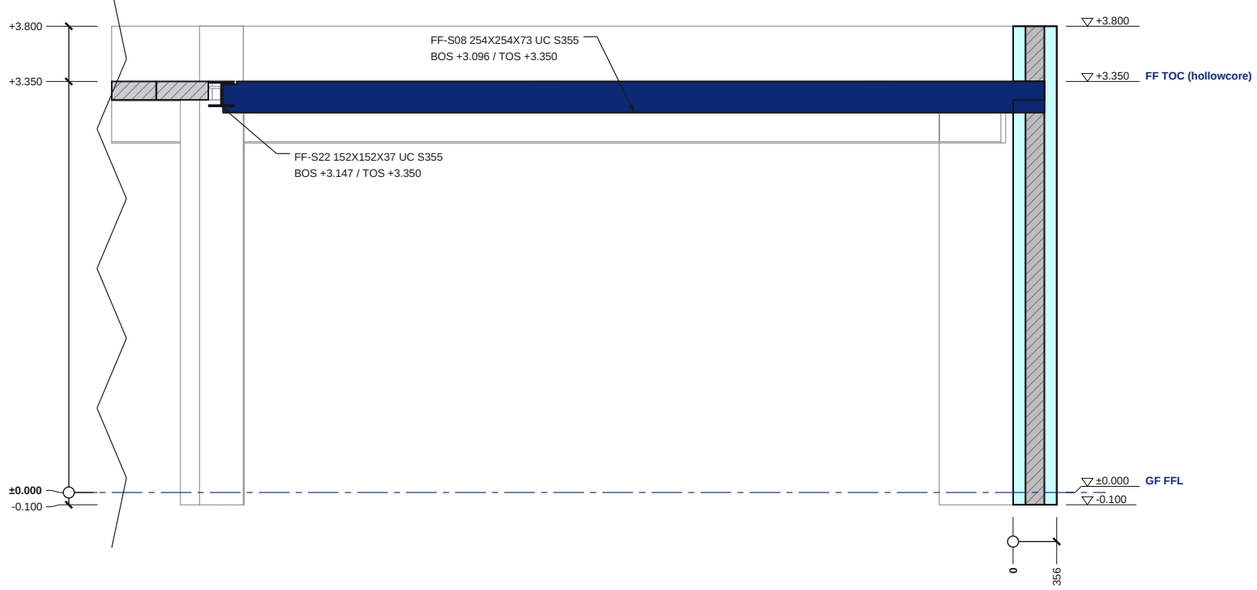

SECTION I-I (PART 2 OF 2)

Scale 1:50 @ A3 | Looking north; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Beyond the cut (line work)

0 1 2m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

SECTION I-I SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-0.100	168.648
GF FFL	±0.000	168.748
FF TOC (hollowcore)	+3.350	172.098
top of ICF W07	+3.800	172.548

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S08	254x254x73 UC S355	+3.096	+3.350
FF-S16	254x146x43 UB S355	+2.849	+3.200
FF-S20	152x152x23 UC S355	+3.198	+3.350
FF-S21	152x152x23 UC S355	+3.198	+3.350
FF-S22	152x152x37 UC S355	+3.147	+3.350

SECTION KEY

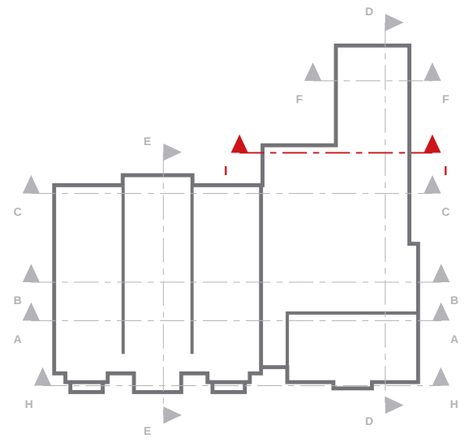

NOTES

1. Section I-I is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL (168.748 AOD); the level table gives AOD.
3. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
4. Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02 in the approval drawings pack.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments

Nudura™ BuildEase

CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE
SECTION I-I
ICF section with levels and build-ups

SCALE	SIZE	DATE
1:50	A3	15.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-SE-08	P02