

FOR APPROVAL - NOT FOR CONSTRUCTION

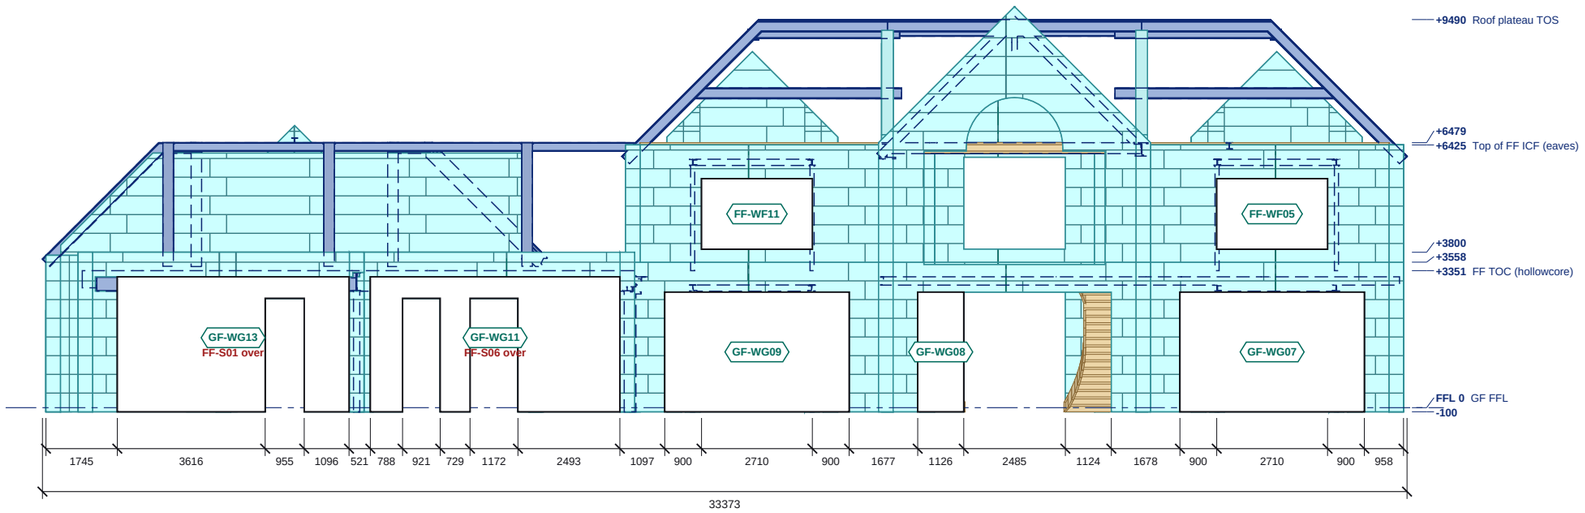

NORTH ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL (AOD in the schedule); sills and heads in the schedule

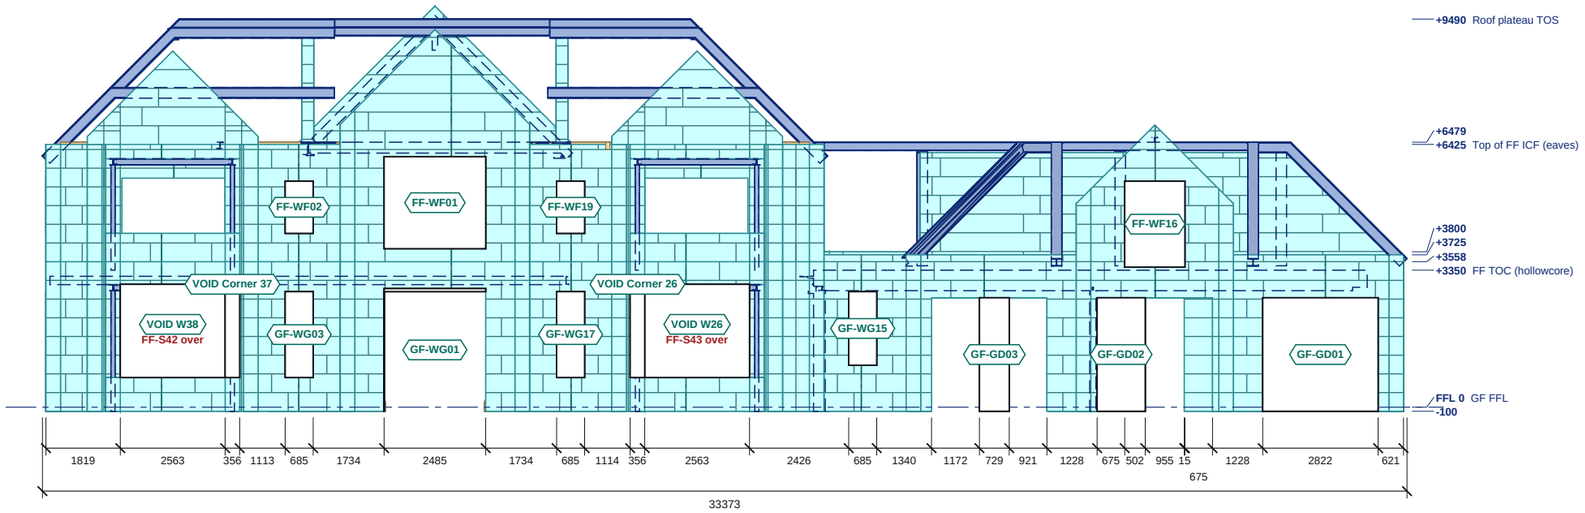

SOUTH ELEVATION

Scale 1:150 @ A3 | Levels above GF FFL (AOD in the schedule); sills and heads in the schedule

0 1 2 3 4 5 6 7 8m

ICF external EPS face
Block course joint
Stack joint
Steel

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

ELEVATION SCHEDULES

NORTH ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
FF-WF05	2710	1725	+3875	+5600	-
FF-WF11	2710	1725	+3875	+5600	-
GF-WG07	4510	2925	-100	+2825	-
GF-WG08	4735	2925	-100	+2825	-
GF-WG09	4510	2925	-100	+2825	-
GF-WG11	6103	3300	-100	+3200	FF-S06 over
GF-WG13	5667	3300	-100	+3200	FF-S01 over

Structural openings in the ICF; sill and head above GF FFL.

SOUTH ELEVATION: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
FF-WF01	2485	2250	+3875	+6125	-
FF-WF02	685	1275	+4250	+5525	-
FF-WF16	1472	2100	+3425	+5525	-
FF-WF19	685	1275	+4250	+5525	-
GF-GD01	2822	2775	-100	+2675	-
GF-GD02	2822	2775	-100	+2675	-
GF-GD03	2822	2775	-100	+2675	-
GF-WG01	2485	3000	-100	+2900	-
GF-WG03	685	2100	+725	+2825	-
GF-WG15	685	1800	+1025	+2825	-
GF-WG17	685	2100	+725	+2825	-
VOID Corner 26	356	2280	+725	+3005	-
VOID Corner 37	356	2280	+725	+3005	-
VOID W26	2563	2280	+725	+3005	FF-S43 over
VOID W38	2563	2280	+725	+3005	FF-S42 over

Structural openings in the ICF; sill and head above GF FFL.

LEVELS ON THESE ELEVATIONS

Level	FFL	AOD
underside of ICF	-100	168.648
GF FFL	0	168.748
FF TOC (hollowcore)	+3350	172.098
FF TOC (hollowcore)	+3351	172.099
top of ICF	+3558	172.306
top of ICF	+3725	172.473
top of ICF	+3800	172.548
Top of FF ICF (eaves)	+6425	175.173
top of roof build-up	+6479	175.227
Roof plateau TOS	+9490	178.238

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL (168.748 AOD). Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. Steel shown as modelled.
4. See UKPCS-003-GA-01 for plan setting out, lintels and steel.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue
P02	15.10.26	Revised to the P01 comments

Nudura™ BuildEase

CLIENT	PROJECT
ICF Homes	Dendrons

DRAWING TITLE

NORTH AND SOUTH ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:150	A3	15.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-EL-01	P02