



FOR APPROVAL - NOT FOR CONSTRUCTION

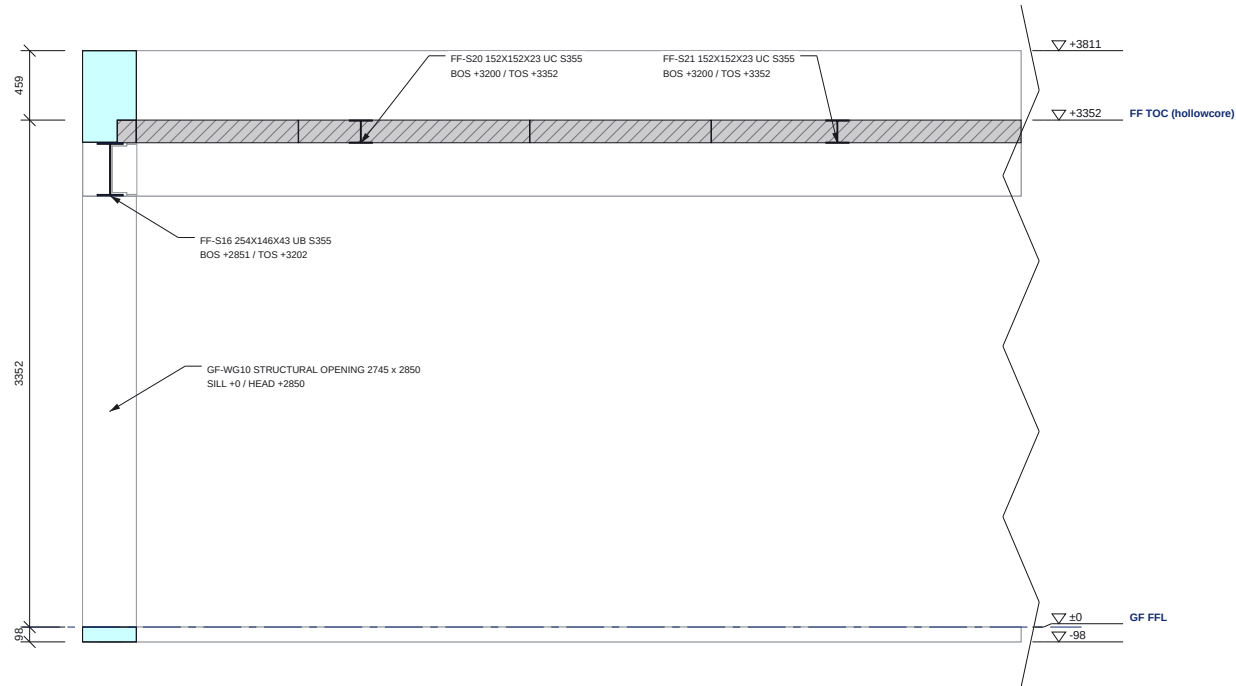

SECTION I-I (PART 1 OF 2)

Scale 1:50 @ A3 | Looking north; levels above GF FFL

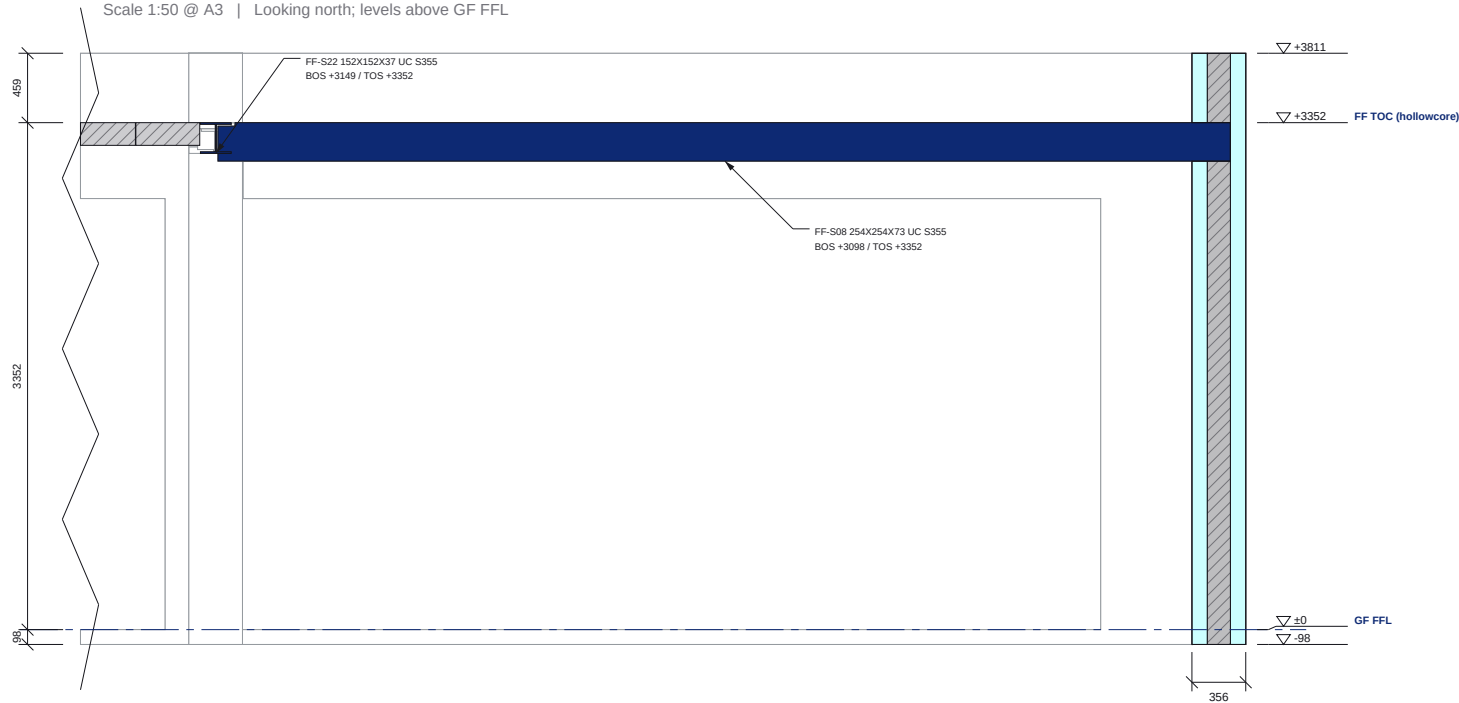

SECTION I-I (PART 2 OF 2)

Scale 1:50 @ A3 | Looking north; levels above GF FFL

- ICF EPS (cut)

ICF concrete core / RC (cut)

Steel (cut)

Screed
- Insulation (PIR / XPS, perimeter)

Blinding / hardcore

Beyond the cut (line work)



SECTION I-I SCHEDULES


LEVELS ON THIS SECTION

Level	FFL	AOD
underside of ICF	-98	168.650
GF FFL	0	168.748
FF TOC (hollowcore)	+3352	172.100
top of ICF	+3811	172.559

STEEL CUT BY THIS SECTION

Mark	Section (engineer)	BOS	TOS
FF-S08	254x254x73 UC S355	+3098	+3352
FF-S16	254x146x43 UB S355	+2851	+3202
FF-S20	152x152x23 UC S355	+3200	+3352
FF-S21	152x152x23 UC S355	+3200	+3352
FF-S22	152x152x37 UC S355	+3149	+3352

SECTION KEY

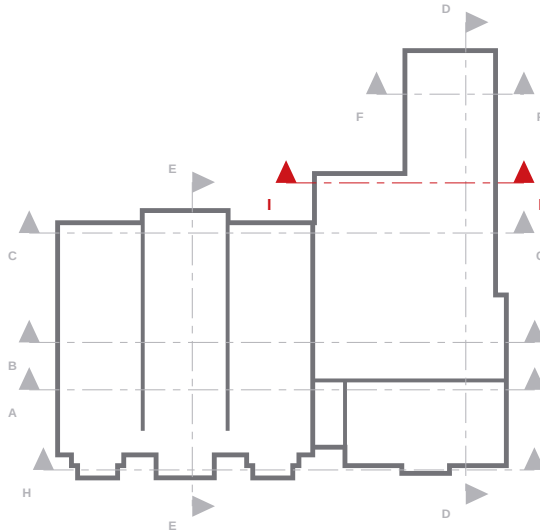

NOTES

- Section I-I is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
- Levels above GF FFL (168.748 AOD); the level table gives AOD.
- ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. ICF per the coordinated model: 6in XR35 (152 mm core, 355.6 mm) external walls, 6in Std (286 mm) internal ICF walls; concrete grade, aggregate, fibre dosage and dowel bars per the Tier Consult specification (to be confirmed).
- Steel marks, BOS / TOS: Tier Consult 078-TCE-DEN-XX-DR-S-096..210 rev -. See UKPCS-003-GA-01 / EL-01 / EL-02.

REVISIONS

REV	DATE	DESCRIPTION
P01	23.09.26	Approval issue



CLIENT

ICF Homes

PROJECT

Dendrons

DRAWING TITLE

SECTION I-I

ICF section with levels and build-ups

SCALE	SIZE	DATE	DRAWN
1:50	A3	23.09.26	TS

STATUS	DRAWING No.	REV
FOR APPROVAL	UKPCS-003-SE-08	P01